



**SILENT
KNIGHT**

by Honeywell

Model 5865-3 and 5865-4 LED Fire Annunciators

IntelliKnight's LED Fire Annunciator modules provide cost effective remote annunciation.

The 5865-3 and 5865-4 LED annunciators provides the most cost effective and convenient means of remote annunciation. You can use up to eight 5865 series annunciators on one IntelliKnight Control Panel.

5865 series annunciators provide you with 30 programmable LED (15 red, 15 yellow) for maximum flexibility. The 5865-3 and 5865-4 fit into a standard 3- or 4-gang electrical box; covered by semi-transparent labels and an eye-pleasing cover plate.


The 5865-3 provides alarm and trouble annunciation for 15 zones while the 5865-4 adds reset and silence input switches for even more versatility.

Model 5865-3 and 5865-4 Fire Annunciators

The 5865 series annunciators provide a visual indication of the current state of the zone inputs on the IntelliKnight Control Panel.

Up to 8 Model 5865s can be used on the IntelliKnight's SBUS. The addresses are DIP switch programmable with addresses ranging from 1 to 31.


Each 5865 Fire Annunciator has a total of 30 programmable LED outputs—15 red and 15 yellow—to indicate the operational status of input zones which are connected to the IntelliKnight panel. In addition the 5865s come with a piezo sounder which give an audio indication during alarms, troubles and supervisory troubles. Typically the red LEDs are used for alarms and the yellow LEDs are used for troubles, however the outputs are not predefined which allows you maximum flexibility.

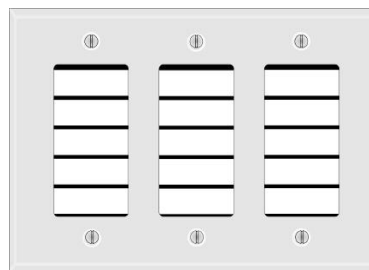

5865-3

Features

- 30 programmable LED outputs (15 red and 15 yellow)
- Up to 8—5865s can be used on one IntelliKnight panel
- Fit into a standard 3- or 4-gang electrical box
- Comes with four semi-transparent labels that can be typed or printed on
- DIP switch addressable
- Connects to IntelliKnight SBUS.
- Both modules UL 864 listed; comply with NFPA 72
- 4-wire connection to IntelliKnight SBUS

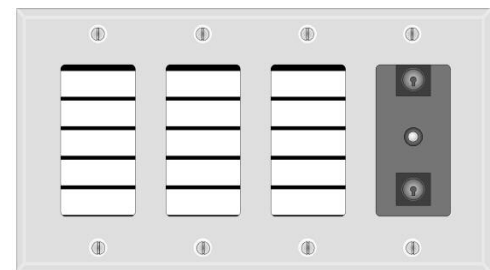

5865-4

Specifications

Operating Voltage: 24VDC

Standby Current: 35mA

Alarm Current: 45 mA

Ambient Temperature: 32°F - 120° F
(0°C to 49°C)

Mounting

5865-3: 3-gang electrical box

5865-4: 4-gang electrical box


Listings

- MEA Approved 429-92-E, Vol 9
- FM Approved
- CSFM Approved

Model 5865-3 and 5865-4 LED Fire Annunciators

Engineering Specifications

The contractor shall furnish and install where indicated on the plans, remote LED annunciator model 5865. A model 5865-3 shall be used for annunciation and a model 5865-4 shall be used for annunciation and reset/silence operation. The annunciators shall provide indications for up to 15 alarm and 15 trouble conditions. The annunciators shall fit inside standard electrical trade boxes, the 5865-3 fits a 3 gang box and a 5865-4 fits a 4 gang box. Boxes shall be a minimum of 2 inches deep. The annunciator shall be UL listed and compatible with the Silent Knight's IntelliKnight 5820 fire control panel.

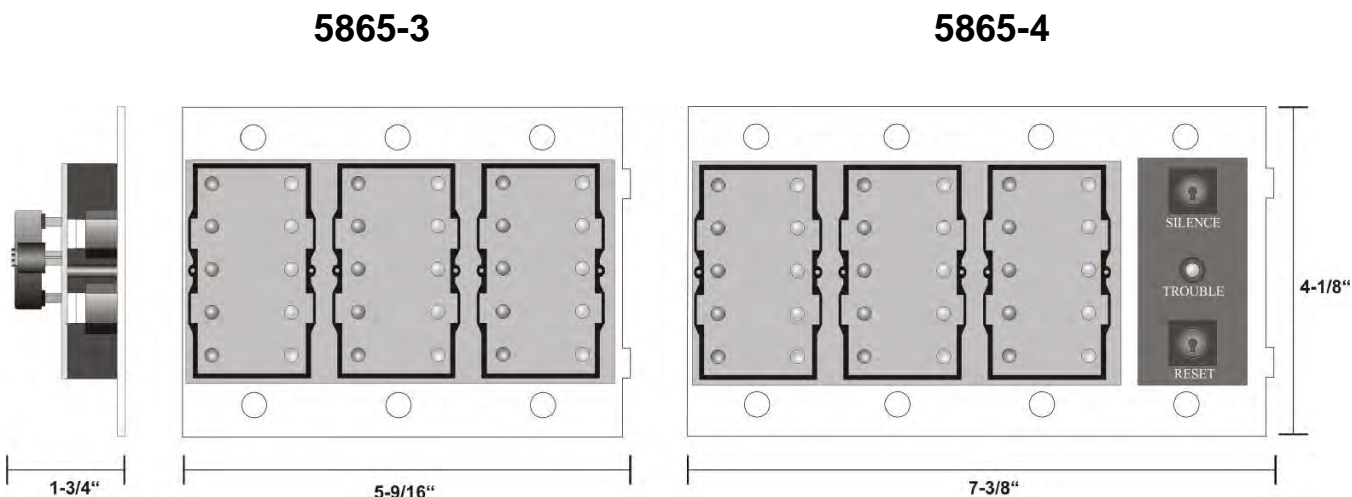

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Silent Knight 12 Clintonville Road, Northford, CT 06472-1610. Phone: (800) 328-0103, Fax: (203) 484-7118. For Technical Support, Please call 800-446-6444. www.silentknight.com

MADE IN AMERICA

P/N# 350032 Rev E
© 2013 Honeywell International Inc.