



## TRANSFORMERS

# TBLU

5W- 25 and 70V, 5 Taps at -3dB Levels

### GENERAL DESCRIPTION

The **TBLU** is a 5W-25/70V transformer with 5 taps at -3dB levels and 7" color-coded, pre-cut leads.

### INTENDED USE - Indoor Environment

<b>Primary Use</b>	Signal tones, voice and music
<b>Installation</b>	Desired tap / common primary leads connected to the output of a constant voltage amplifier. Secondary / common attached to a nominal 8 Ohm loudspeaker.

### AUDIO SPECIFICATIONS



<b>Primary Volts</b>	25V/70.7V
<b>Power Rating</b>	5W
<b>Primary Taps (-3 dB Steps)</b>	5 per voltage
<b>Secondary Load</b>	8-Ohms, Nominal
<b>Frequency Response</b>	100 Hz- 15 kHz
<b>Insertion Loss</b>	1.0 dB

### MECHANICAL SPECIFICATIONS

<b>Primary Connection</b>	7" Color-Coded, Pre-Cut
<b>Secondary Connection</b>	6" Color-Coded, Pre-Cut
<b>Shipping Weight</b>	10 Oz

### RECOMMENDED QUAM COMPONENTS

<b>Loudspeakers</b>	Any 8-Ohm device (8C10DVPAX requires two transformers)
---------------------	---

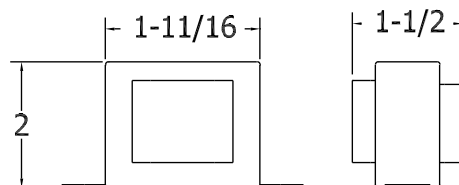

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the QUAM Architects' and Engineers' Resources section on the web at:  
[www.QuamSpeakers.com](http://www.QuamSpeakers.com)

© 2013 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.



QUAM-NICHOLS COMPANY, INC.  
234 East Marquette Rd.  
Chicago, IL. 60637  
Tel: 1-800-NEED-NOW (800-633-3669)  
Fax: 1-888-NEED-NOW (888-633-3669)  
e-mail: [NeedNow@QNC.com](mailto:NeedNow@QNC.com)  
[www.QuamSpeakers.com](http://www.QuamSpeakers.com)