

MPD-DS-600V-20A-2P-R-N4X

20A Weatherproof Rotary Disconnect Switch - 2P, 600V Rated - Type 3R/4X - Outdoor Rated

Product ID: 306243

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MPD-DS-600V-20A-2P-R-N4X AC Disconnect Switch

Unit Type: Rotary Disconnect Switch

Dimensions: 3.9" x 6.38" x 4.37"

Weight: -

Voltage: 600V Rated

Max Amp Rating: 20 Amps

HP: 25HP @ 600V, 20HP @ 480V, 7.5HP @ 240V

SCCR: 65kA

Disconnect Type: Rotary

Poles: 2P

Operating Temperature: -

Materials: -

Mount: Wall

Wiring: 10-14 AWG Solid or Stranded

Ratings/Features

Type 1, 3, 3R, 4, 4X, 12

Weatherproof

Outdoor Rated

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

The Larson Electronics MPD-DS-600V-20A-2P-R-N4X AC Disconnect Switch is an accessory for power distribution systems. This 20-amp device acts as an overload breaker and comes with a 600V voltage rating. The weatherproof and outdoor rated unit is equipped with a red rotary switch for manual disconnection.


The MPD-DS-600V-20A-2P-R-N4X is rated for 20 amps. This 25 HP power

distribution accessory has a 2-pole configuration along with a 600V AC voltage rating. A red rotary handle is used to engage the disconnect, which features a 65kA SCCR rating. The enclosed unit is padlockable to deter tampering. The MPD-DS-600V-20A-2P-R-N4X is weatherproof and outdoor rated. This unit accepts 10-14 AWG solid or stranded wiring. During installation, operators can mount the device on walls.

Applications: Industrial and light commercial applications, air conditioning units, food processing and any other power distribution systems that require overload breaker protection.


At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Frequently Asked Questions (FAQ)

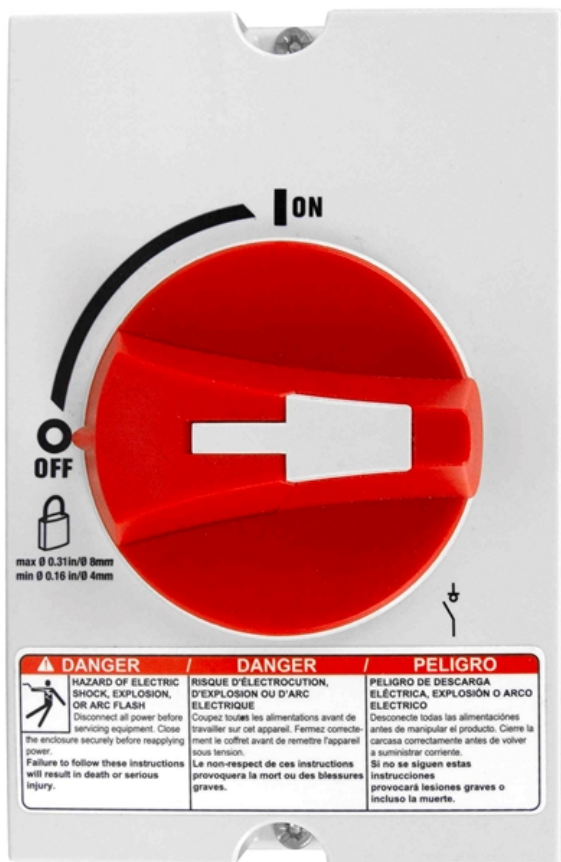





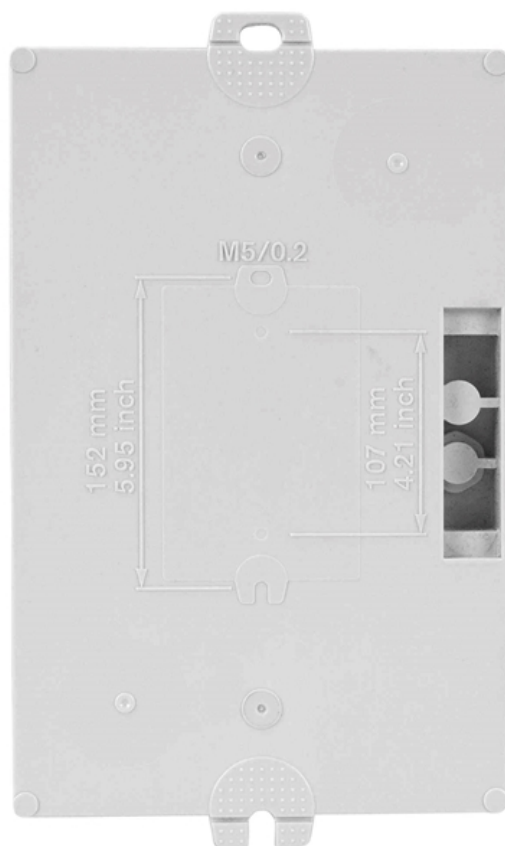

MPD-DS-600V-20A-2P-R-N4X

Product ID: 306243

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)