



Overview

VCLASS unified power systems are engineered to house FlexPower® power modules alongside HID Vertx™ access hardware in one compact, secure system.

This unit is a 325W dual voltage 12V and 24V DC access power system.

C8 lock control module provide sixteen access control inputs capable of voltage or dry contact activation, and sixteen outputs programmable for failsafe / failsecure operation at either 12 or 24 VDC and controlled by the integrated fire alarm interface circuit on the FPO. D8 module provides sixteen fused outputs and each output is configurable for 12 or 24VDC operation.

VCLASS enclosures are painted steel with removable backplate and include lock, two (2) keys and tamper switch.

System Features

- ♦ **FPO offline power supply**
 - 120 or 230 VAC input
 - 12 and 24 VDC outputs
 - On board Fire Alarm Interface
 - Continuous and resettable DC
- ♦ **Distributed outputs**
 - Sixteen auxiliary - fused at 3A each
 - Sixteen lock control - fused at 3A each
- ♦ **Remote Monitoring & Control Option (requires NetLink module)**
 - Live voltage / current reporting
 - Remote battery load testing
 - Output power cycling and abnormal operation alert
 - System / AC fault reporting

Enclosure Features

- ♦ **Labor saving design**
 - Pre-wired FlexPower section
 - Pre-formed knockouts
 - Removeable backplate simplifies install
 - Pre-defined hole pattern for power section
 - Access panels mount in predefined area with included standoffs - no drilling required
- ♦ **Additional benefits**
 - 4.5" enclosure depth fits battery sets
 - Wire management room
 - Tamper switch, lock, dual key set standard

Lifetime Warranty



Ordering


Description

FP075/250-2C82D8E4V1 325W (12V & 24V) 16 lock & aux outputs, VCLASS enclosure

Specifications

Input Power	Input 120/230 VAC 50/60 Hz 325 Watts (2.70A) Overload and short circuit protection Over temperature protection Polarized AC power supply disconnect
Output Power	PS1: FPO75: 12V/6A or 24V/3A 75 Watts PS2: FPO250: 12V/20A or 24V/10A 250 Watts Outputs: Continuous (DC1) Resettable (DC2) 16 auxiliary outputs, fused at 3A each 16 lock control outputs, fused at 3A each 120 mV output voltage ripple System Efficiency: 87% System BTU Rating: 142 BTU/Hr
Battery Charging	Independent built-in 2A charger for sealed lead acid or gel type batteries Microprocessor dual rate charging of 12 or 24 V battery sets Automatic switchover to standby battery when AC fails Zero voltage drop when switched over to battery backup
Supervision	AC Fail (form "C" contacts) System fail (form "C" contacts) may be triggered by low/no battery, short to earth ground and power supply failure
Visual Indicators	AC input, DC1 and DC2 output System fault AC fault Short to earth ground Reverse battery polarity Fire Alarm Input activated C8: DC input, output and Fault D8: DC outputs
Regulatory Compliance	UL294, UL603, UL1076 ULC S318, ULC S319, CSA C22.2 #107.1, CSA C22.2 #60950 FCC Part 15, Subpart B / CSFM Approved
Physical Dimensions	Enclosure: 24.00H x 20.00W x 4.50D in. (61.00 x 51.00 x 11.50 cm)
Mounting Pattern For	V1000, V100, V200, V300

E4V1 backplate mounting pattern for power and access boards

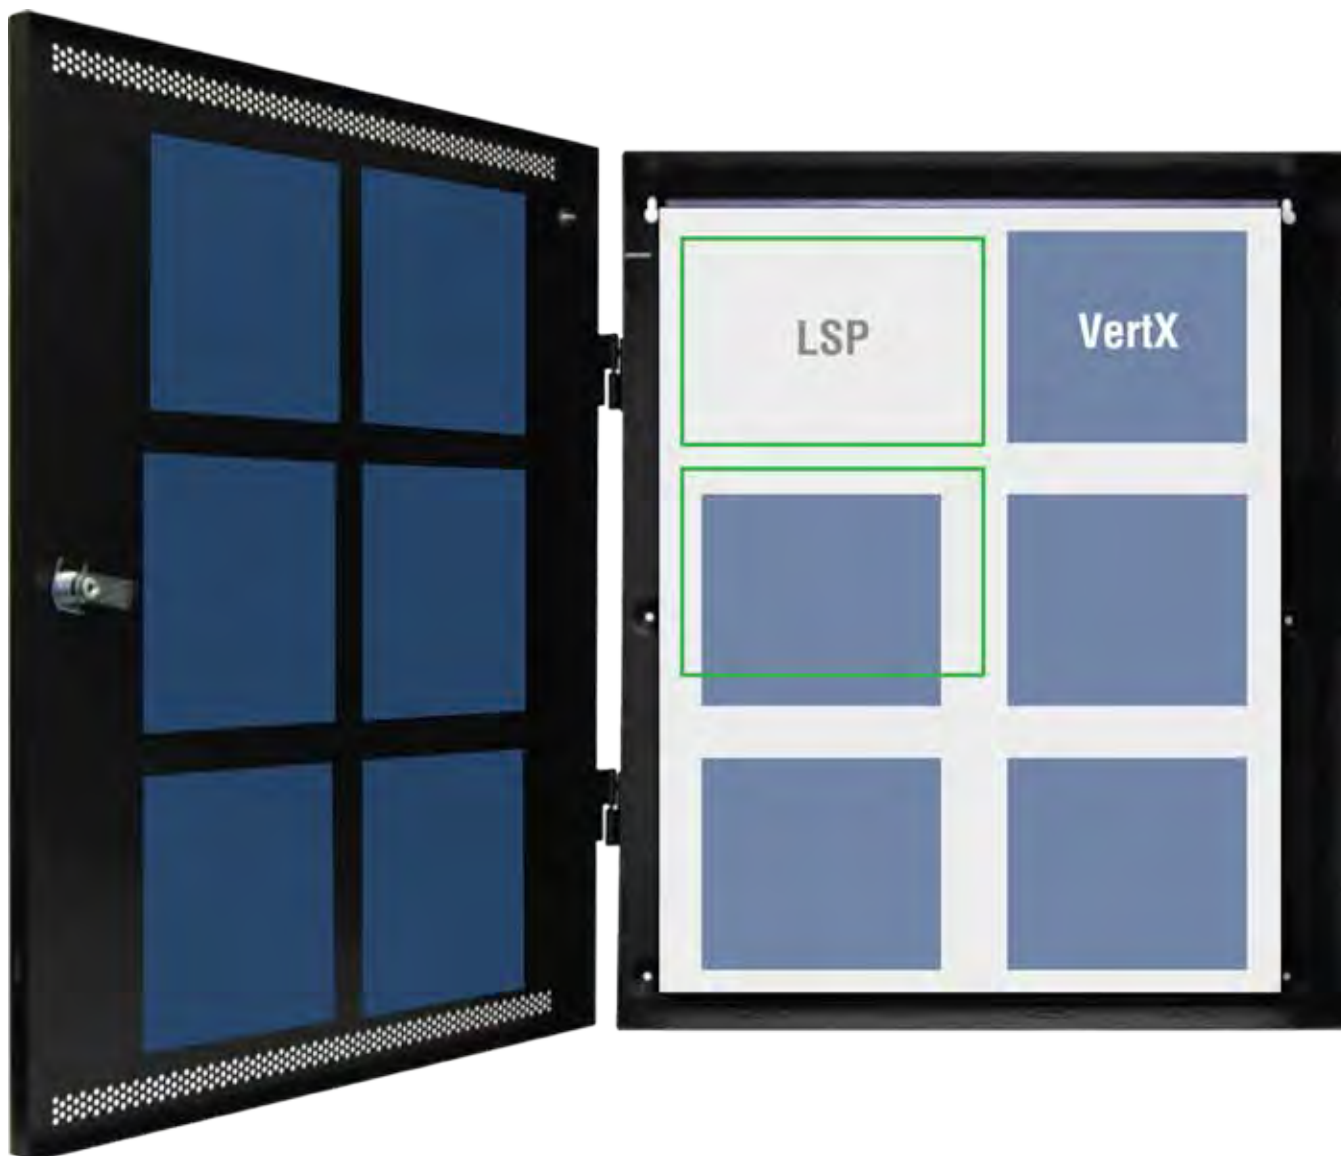

lifesafetypower.com

(888) 577-2898

info@lifesafetypower.com

Specifications subject to change without notice.

© 2015 LifeSafety Power Inc. All rights reserved. LifeSafety Power and FlexPower are registered trademarks of LifeSafety Power Inc. All other trademarks and copyrights are the property of their respective owners.

P01-654A 04/15

LifeSafety Power, Inc.
750 Tower Road, Unit B
Mundelein, IL 60060 USA