

PanView iQ™ Copper Patch Cords

specifications

Category 6 and Category 6A patch cords shall be constructed of shielded or unshielded twisted pair stranded copper cable with the addition of a ninth conductor. The patch cords shall be terminated at each end with an enhanced performance modular plug that also terminates the ninth conductor on the top of the plug. The patch cords shall be used in conjunction with intelligent patch panels containing the ninth conductor receptacle.



technical information

Category 6/Class E performance:	Exceeds all ANSI/TIA-568-C.2 Category 6 and ISO 11801 2nd Edition Class E channel standard requirements at swept frequencies up to 250 MHz
Category 6A/Class EA performance:	Exceeds all ANSI/TIA-568-C.2 Category 6A and ISO 11801 2nd Edition Class EA channel standard requirements at swept frequencies up to 500 MHz
FCC compliance:	Meets FCC Part 68 Subpart F; contacts plated with 50 micro-inches of gold
IEC compliance:	Meets IEC 60603-7
UL rated:	No. 1863

key features and benefits

100% performance tested	Assurance that each patch cord will deliver the critical electrical performance requirements
Internal pair manager	Optimizes performance and consistency by reducing untwist at plug
Slender strain relief boot	Provides easy access in high-density applications
Patented tangle free latch	Prevents snags and provides easy release, saving time on frequent moves, adds, and changes
Quality materials	Utilizes 24 AWG UTP/STP stranded copper cable and RJ45 modular plugs; plug contacts plated with 50 micro-inches of gold for superior performance
Ninth conductor continuity	Provides continuity through the patch cord, enabling the PanView iQ™ System to monitor connectivity

applications

Panduit's PViQ™ System Hardware, which includes intelligent patch panels, modules, and cabling, seamlessly feeds information directly into the Physical Infrastructure Manager™ (PIM™) Software Platform to provide continuous real-time patch field monitoring and visibility of physical infrastructure connectivity for enhanced system reliability and security and capacity management. PViQ™ Patch Panels support

tiered installations to provide customers with the flexibility of installing passive connectivity that may be upgraded to fully managed at a future time. PViQ™ Copper Patch Cords are a component of the PViQ™ System. With certified performance to Category 6 and Category 6A standards, these patch cords are ideal for today's high-performance applications. The ninth conductor enables robust monitoring of the patch field with the PViQ™ System.

PanView iQ™ System

PanView iQ™ Patch Cords

Category 6 UTP:	PVUTSPC*BBUY
UTP metric:	PVUTSPC**MBUY
STP 10Gig™:	PVSTP6X***MB^
UTP 10Gig™:	PVUTP6X***MB^

PanView iQ™ Patch Panels

Modular, intelligent, blank 24-port	
Flat unshielded:	PVQ-MIQPU24
Flat shielded:	PVQ-MIQPS24
Angled unshielded:	PVQ-MIQAPU24
Angled shielded:	PVQ-MIQAPS24

PanView iQ™ Intelligence Modules

Panel manager (PM):	PVQ-PM
Expansion module (EM):	PVQ-EM

NOTE: PM requires PanView iQ™ Power Supply (not included).

PanView iQ™ Hardware Kits

Kit with (4) PanView iQ™ Patch Panels, (1) PanView iQ™ PM, (3) PanView iQ™ EMs, and accessories

Flat unshielded kit:	PVQ-MIQPS96F
Angled unshielded kit:	PVQ-MIQPS96A

NOTE: PM requires PanView iQ™ Power Supply (not included).

PanView iQ™ Power Supply

12 volt power supply	
(North America):	PVQ-PS12VDC-S
(Europe):	PVQ-PS12VDC-E
(UK):	PVQ-PS12VDC-U
(Japan):	PVQ-PS12VDC-J

PIM™ Software Platform and Modules

Base functionality module:	PIM-BASE
Connectivity management module:	PIM-CONNECT
Maintenance, support, and warranty agreement:	PIM-CAMA
Software and documentation:	PIM-MEDIA


*Available in 3, 5, 7, 9, 14 or 20 feet

**Available in 1, 2, 3, 5, 7 or 10 meters

***Available in 1, 2, 3, 5 or 10 meters

^Available in BU (Blue), GR (Green), RD (Red), YL (Yellow), or BL (Black).

PanView iQ™ Copper Patch Cords

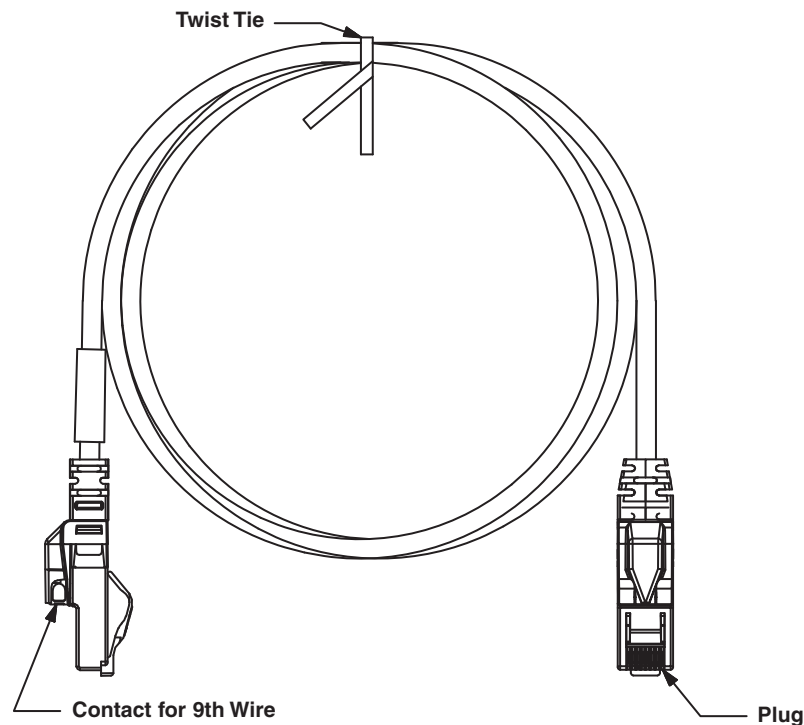

T568B Wiring Scheme

Plug Position	Cable Wire
1	White/Orange
2	Orange
3	White/Green
4	Blue
5	White/Blue
6	Green
7	White/Brown
8	Brown

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300 and reference PVSP11

PANDUIT®

©2011 Panduit Corp.
ALL RIGHTS RESERVED.

WW-PVSP11

11/2011