

### **TECHNICAL SPECIFICATIONS**

# **Junction box for PTZ Cameras**

## L3PTZJB

## **SUPPORTED MODELS:**

Wall Mount Arm Included with L3IP4PTZ30X & LA5PTZ33X Cameras L3PTZCRNMT (Outside Corner Mount)
L3PTZPOLEMT (Pole Mount)

## **FEATURES:**

- Outdoor Junction Box for Liberty IP & Analog PTZ Cameras
- Heavy Duty Aluminum Construction
- Hinged Door for Easy Installation
- (3) 1/2" Bottom Conduit Access




## **SPECIFICATIONS:**

General	
Material	Heavy Duty Aluminum
Color	White
Product Dimensions	396.5(L) × 209.2(W) ×310(H)mm / 15.6"(L) x 8.2"(W) x 12.2"(H)
Product Weight	3.125g / 6.9lb
Max Bearing Weight	10kg / 22lb
Conduit Access	(3) 1/2" Conduit Access for Cabling

## **INCLUDED ACCESSORIES:**


General		
1/2" Grommets for Cables	3	
Mouning Surface Screws	4	
Hex Bolts for Door	4	
Hex Bolts for PTZ Mount	4	
Quick Start Guide	1	

### **HOLE MARKINGS & DIMENSIONS:**

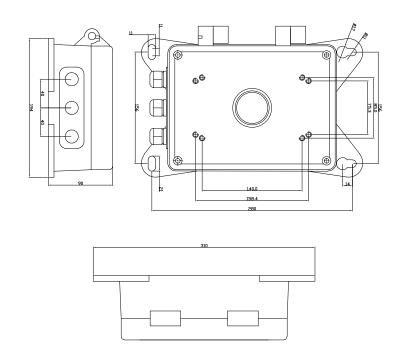

### **DIMENSIONS:**

Shown with included wall mount for L3IP4PTZ30X & LA5PTZ33X below.







# **Junction box for PTZ Cameras**

L3PTZJB

### **ABOUT THIS BRACKET – Read Before Use**

- 1. Before installation, please check the bracket packing and accessories are intact. If the bracket is damaged or missing accessories please contact us at 855-388-7422.
- 2. Do not exceed the MAX load listed on the bracket label.
- 3. Check the installation area and make sure it will support the total weight of the installed product and bracket.
- 4. Bracket ships with installation screws, check the material the bracket will be installed onto and use appropriate screws based on the material (may not be supplied with bracket).
- 5. If the bracket is installed near the ocean or areas exposed to heavy chemicals corrosion may occur which can affect the strength of the bracket. Check the bracket regularly for corrosion.