

# Pendent Cap for Select Liberty Cameras\*

\* Requires L3HWM1 Wall Mount or L3CPM1 Pendent Mount

## SUPPORTED MODELS:

L3IP4VFDS, L3IP8VFDS, LA5VFDIR100, LA5VFDIR100IN


## FEATURES:

- Pendent Mount for Dome Camera
- Aluminum Alloy
- For Indoor & Outdoor Use

## SPECIFICATIONS:

	L3PC5
Material	Aluminum Alloy
Color	White
Product Dimensions	Ø122.8 x 68mm / Ø4.83 x 2.68"
Product Weight	0.17kg / 0.37 Lb.
Max Bearing Weight	3 kg / 6.61 Lb.

## DIMENSIONS:

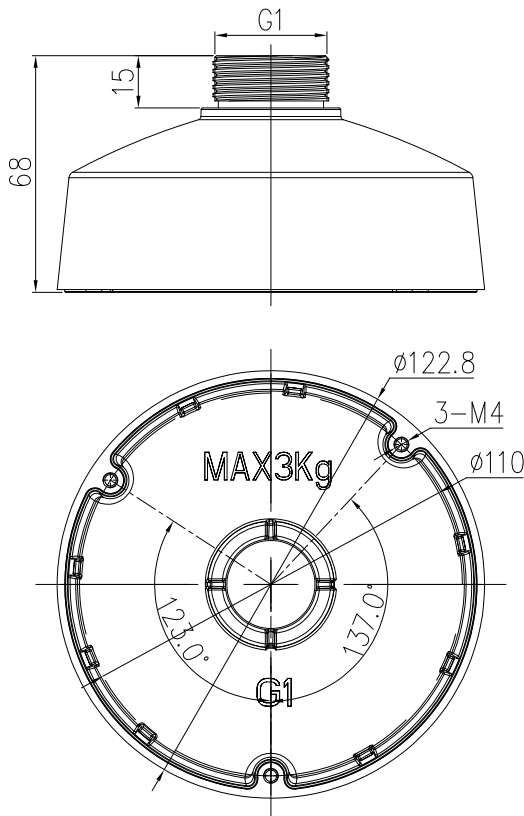

L3PC5

L3PC5

## INCLUDED ACCESSORIES:

Item	Qty
Pendent Cap	1
Gasket w/o Notch for L3IP Models	1
Gasket w/Notch for LA5VFD Models	1
Philips Round PM4x10mm	3



## ABOUT THIS BRACKET – Read Before Use

1. Before installation, please check the bracket packing and accessories are intact. If the bracket is damaged or missing accessories please contact us at 855-388-7422.
2. Do not exceed the MAX load listed on the bracket label.
3. Check the installation area and make sure it will support the total weight of the installed product and bracket.
4. Bracket ships with installation screws, check the material the bracket will be installed onto and use appropriate screws based on the material (may not be supplied with bracket).
5. If the bracket is installed near the ocean or areas exposed to heavy chemicals corrosion may occur which can affect the strength of the bracket. Check the bracket regularly for corrosion.

**SEE PAGE 2 FOR GASKET SELECTION AND DOME INSTALLATION**

### L3PC5 DOME INSTALLATION GUIDE:

**L3PC5**

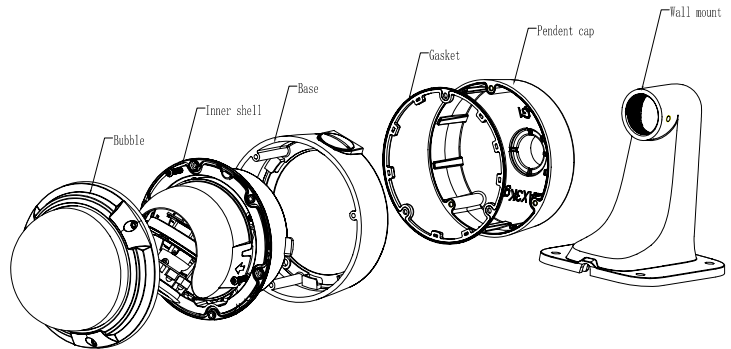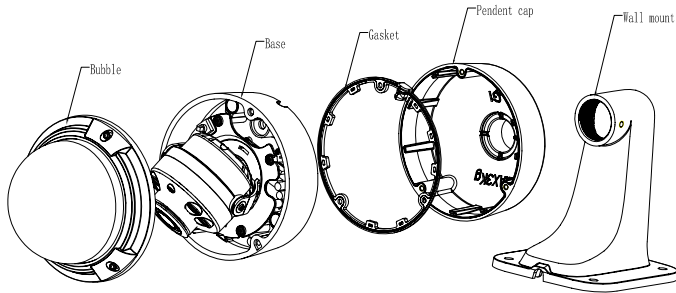

#### Installation of L3IP4VFDS & L3IP8VFDS

1. Twist the pendant cap into the wall mount, fix it by fastening the screw on the side.
2. Fit the gasket onto the pendant cap.
3. Unscrew the screws with wrench on camera, open the bubble.
4. Connect the cables, install the camera base by aligning the three holes on the bottom with the three threaded holes on pendant cap. Fix the camera base with screws.
5. Adjust the monitoring direction of the camera, install the camera bubble and fasten the screws.




#### Installation of LA5VFDIR100, LA5VFDIR100IN

1. Twist the pendant cap into the wall mount, fix it by fastening the screw on the side.
2. Fit the gasket onto the pendant cap.
3. Unscrew the screws with wrench on camera, open the bubble.
4. Unscrew the screws that fixed the inner shell, then the three holes on the bottom can be seen.
5. Install the camera base by aligning the three holes on the bottom with the three threaded holes on pendant cap. Connect the camera cables.
6. Install the inner shell on the base.
7. Adjust the monitoring direction of the camera, install the camera bubble and fasten the screws.

### L3PC5 GASKET SELECTION:




Choose the correct Gasket according to the camera housing.  
Note there are two types of Gasket, with notch and without notch.

#### LA5VFDIR100IN






Use Gasket with no Notch

#### LA5VFDIR100



Uses Gasket with Notch

#### L3IP4VFDS, L3IP8VFDS



Notch