

LAN-Trak OSP Category 5E

4 Pair #24 AWG ScTP Category 5E Outdoor Cable

PART # M57562

DESCRIPTION

ENHANCED OVERALL SHIELDED TWISTED PAIR (ScTP) CATEGORY 5E CABLE FOR USE IN HORIZONTAL CABLING SYSTEMS PER TIA/EIA 568-B. THE CABLE EXCEEDS TIA 568-B.2 CATEGORY 5e AND ISO/IEC 11801 CATEGORY 5 ELECTRICAL CHARACTERISTICS. THE CABLE CONSISTS OF #24 AWG SOLID BARE COPPER INSULATED CONDUCTORS, ASSEMBLED INTO FOUR TIGHTLY TWISTED PAIRS, FLOODED TO PREVENT MOISTURE INGRESS, UNDER AN INNER JACKET, CORRUGATED ALUMINUM SHIELD AND OUTER JACKET. THIS PRODUCT AND/OR ITS MANUFACTURE IS COVERED BY US PATENT NO. 5424491.

THE CABLE IS SUITABLE FOR OUTDOOR USE IN DUCT, FOR AERIAL LASHING, AND FOR DIRECT BURIAL. IT IS WATER BLOCKED AND HAS A BLACK SUNLIGHT RESISTANT JACKET. THE CABLE IS NOT UL OR CSA LISTED, SINCE IT IS NOT FLAME RETARDANT. CONSULT THE NATIONAL ELECTRICAL CODE (NEC) ARTICLE 800 FOR USE IN BUILDINGS.

THIS CABLE COMPLIES WITH THE EU-RoHS DIRECTIVE 2002/95/EC (RESTRICTIONS ON HAZARDOUS SUBSTANCES) REGULATIONS.

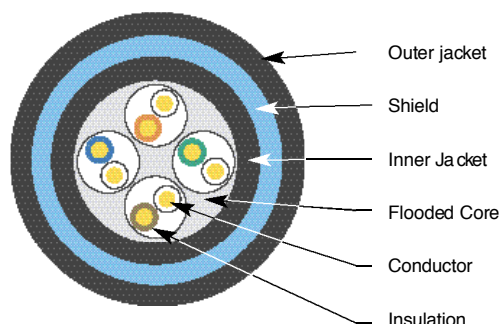


TABLE 1

PAIR NUMBER	PAIR COLOR CODE	
	WHITE-BLUE	BLUE
1	WHITE-ORANGE	ORANGE
2	WHITE-GREEN	GREEN
3	WHITE-BROWN	BROWN
4		

SUPPORTED APPLICATIONS

IEEE 802.3 10BASE-T (ETHERNET), 100BASE-T (FAST ETHERNET), AND 1000BASE-T (GIGABIT ETHERNET), ANSI.X3.263 FDDI TP-PMD, IEEE 802.5 4 AND 16 Mbps TOKEN RING, ATM UP TO 155 Mbps, 550 MHz BROADBAND VIDEO AND STANDARDS UNDER DEVELOPMENT SUCH AS ATM AT 622 Mbps & 1.2 Gbps.

CONSTRUCTION

PRIMARIES: CONDUCTOR: 24 AWG (.5 mm) SOLID BARE COPPER
INSULATION: THERMOPLASTIC POLYOLEFIN

PAIR ASSEMBLY: 2 PRIMARIES TWISTED IN VARIED LAYS

COLOR CODE: SEE TABLE 1 (WHITE CONDS HAVE INTEGRAL STRIPE TO MATCH THEIR MATE)

CABLE ASSEMBLY: 4 PAIRS CABLED TOGETHER

INNER JACKET: MATERIAL: BLACK POLYETHYLENE
NOMINAL WALL: .030" (.76 mm)
NOMINAL DIAMETER: .231" (5.87 mm)

SHIELD: CORRUGATED COATED ALUMINUM TAPE

OUTER JACKET: MATERIAL: BLACK POLYETHYLENE
NOMINAL WALL: .045" (1.14 mm)
NOMINAL DIAMETER: .380" (9.65 mm)

PRINT: MOHAWK LAN-TRAK (TM) OSP CAT.5E+ 4PR 24
AWG --- ROHS M57562 (DATE CODE)
(SEQUENTIAL FOOTAGE MARKERS)

NOTE: CABLE FLOODED FOR MOISTURE PROTECTION

PHYSICAL CHARACTERISTICS

CABLE WEIGHT: 88 lbs/1000ft (131 kg/km)

BEND RADIUS: 5.7" (145 mm) MIN (15 x CABLE OD)

OPERATING TEMP.: -40°C to +60°C (-40°F to +140°F)

STORAGE TEMP.: -40°C to +75°C (-40°F to +167°F)

INSTALLATION TEMP.*: -20°C to +60°C (-4°F to +140°F)

*THE INSTALLATION TEMPERATURE REFERS TO THE TEMPERATURE OF THE CABLE WHILE BEING INSTALLED OR PULLED.

LAN-Trak OSP Category 5E

4 Pair #24 AWG ScTP Category 5E Outdoor Cable

ELECTRICAL CHARACTERISTICS (REF TABLE 2)

STANDARDS:	EXCEEDS TIA/EIA 568-B.2 CAT 5e AND ISO/IEC 11801 CAT 5 HORIZONTAL CABLE	INSERTION LOSS:	$1.97 f + .013 f + \frac{.050}{f}$ dB/100m MAX
VOLTAGE RATING:	300 VOLTS	NEAR END CROSSTALK (NEXT):	$40.3 - 15 \log_{10}(f/100)$ dB/100m MIN
CONDUCTOR DCR:	8.9 Ω /100m (27.1 Ω /Mft) MAX	POWER SUM NEAR END CROSSTALK (PS-NEXT):	$38.3 - 15 \log_{10}(f/100)$ dB/100m MIN
DCR UNBALANCE:	3% MAX	EQUAL LEVEL FAR END CROSSTALK (ELFEXT):	$27.8 - 20 \log_{10}(f/100)$ dB/100m MIN
MUTUAL CAPACITANCE:	51.5 pF/m (15.7 pF/ft) NOM	POWER SUM EQUAL LEVEL FAR END CROSSTALK (PS-ELFEXT):	$24.8 - 20 \log_{10}(f/100)$ dB/100m MIN
CAPACITANCE UNBALANCE PAIR/GROUND:	66 pF/100m (200 pF/Mft) MAX	PROPAGATION DELAY:	$534 + 36 / f$ ns/100m MAX
CHARACTERISTIC IMPEDANCE:	100 $\Omega \pm 15\%$ (1-400 MHz)	DELTA DELAY (SKEW):	25 ns/100m MAX
INPUT IMPEDANCE:	100 $\Omega \pm 15\%$ (1-100 MHz) 100 $\Omega \pm 22\%$ (>100-200 MHz)	NOMINAL VELOCITY OF PROPAGATION (NVP):	65%
RETURN LOSS (RL):	20 + 5 $\log_{10}(f)$ dB MIN (1-10 MHz) 25 dB MIN (>10-20 MHz) 25 - 7 $\log_{10}(f/20)$ dB MIN (>20 MHz)	WHERE f = FREQUENCY IN MHz from .772 to 250 MHz, except for ELFEXT and PS-ELFEXT from 1 to 250 MHz.	

TABLE 2

REFERENCE ELECTRICAL CHARACTERISTICS

FREQ (MHz)	INSERTION LOSS (dB/100m)			NEXT (dB/100m)		ACR (dB/100m)	PS-NEXT (dB/100m)		PS-ACR (dB/100m)	ELFEXT (dB/100m)	PS-ELFEXT (dB/100m)	RL (dB)
	avg	max	max	avg	min	min	avg	min	min	min	min	min
1.0	1.8	2.0	6.2	80	70.3	70.3	73	68.3	66.3	67.8	64.8	20.0
4.0	3.6	4.0	12.2	70	61.3	59.3	63	59.3	55.3	55.8	52.8	23.0
8.0	5.2	5.7	17.4	66	56.8	53.1	59	54.8	49.1	49.7	46.7	24.5
10.0	5.8	6.4	19.4	64	55.3	50.9	58	53.3	46.9	47.8	44.8	25.0
16.0	7.3	8.1	24.7	62	52.2	46.1	56	50.2	42.1	43.7	40.7	25.0
20.0	8.3	9.1	27.7	60	50.8	43.7	54	48.8	39.7	41.8	38.8	25.0
25.0	9.3	10.2	31.0	59	49.3	41.1	52	47.3	37.1	39.8	36.8	24.3
31.25	10.4	11.4	34.8	58	47.9	38.5	51	45.9	34.5	37.9	34.9	23.6
62.5	15.1	16.4	50	54	43.4	29.0	47	41.4	25.0	31.9	28.9	21.5
100.0	19.6	21.0	64	50	40.3	21.3	43	38.3	17.3	27.8	24.8	20.1
155.0	25.0	26.6	81	48	37.4	12.9	41	35.4	8.9	24.0	21.0	18.8
200.0	28.8	30.5	93	46	35.8	7.3	40	33.8	3.3	21.8	18.8	18.0
250.0	32.8	34.4	105	45	34.3	1.9	38	32.3	-	19.8	16.8	17.3
300.0	36.5	38.0	116	44	33.1	-	37	31.1	-	-	-	16.8
350.0	40.0	41.4	126	43	32.1	-	36	30.1	-	-	-	16.3
400.0	43.2	44.6	136	42	31.3	-	35	29.3	-	-	-	15.9

VALUES ABOVE 250 MHz ARE FOR ENGINEERING INFORMATION ONLY.

Mohawk reserves the right to change specification in the interest of product enhancement.

MOHAWK
Cabling Excellence for Open Architecture

9 Mohawk Drive, Leominster, MA 01453
(978) 537-9961 • 1-800-422-9961 • FAX (978) 537-4358
info@mohawk-cable.com www.mohawk-cable.com
©Mohawk 11/2007