


760038075 | P-036-OD-5L-FMUBK

Indoor/Outdoor Plenum Distribution Cable, 36 fiber multi-unit with 12 fiber subunits

Representative Image

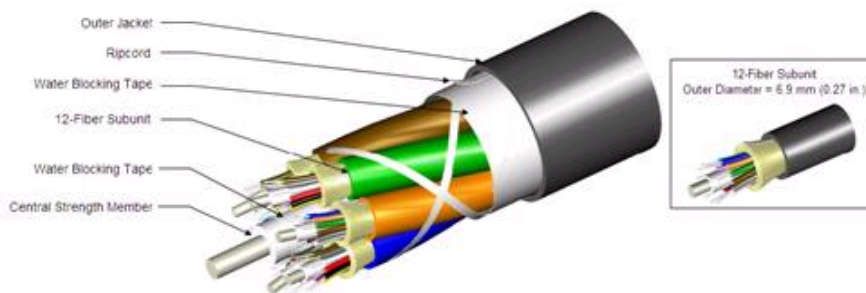

General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	LazrSPEED® 300, 50 µm multimode fiber
Total Fiber Quantity	36
Fiber Type	LazrSPEED® 300, 50 µm multimode fiber
Fiber Type, quantity	36
Fibers Per Subunit, quantity	12
Jacket Color	Black
Jacket UV Resistance	UV stabilized

Dimensions

Buffer Tube/Subunit Diameter	6.90 mm 0.27 in
Cable Weight	174.0 lb/kft 259.0 kg/km
Diameter Over Jacket	17.10 mm 0.67 in
Subunit, quantity	3

Physical Specifications

Minimum Bend Radius, loaded	25.7 cm 10.1 in
Minimum Bend Radius, unloaded	17.1 cm 6.7 in
Tensile Load, long term, maximum	240 lbf 1068 N
Tensile Load, short term, maximum	800 lbf 3560 N

760038075 | P-036-OD-5L-FMUBK

Vertical Rise, maximum 421.0 m | 1381.2 ft

Flame Test Specifications

Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 262

Environmental Specifications

Environmental Space	Plenum
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

Mechanical Test Specifications

Compression	126 lb/in 22 N/mm
Compression Test Method	FOTP-41 IEC 60794-1-2, Section 7
Flex	100 cycles
Flex Test Method	FOTP-104 IEC 60794-1-2, Section 10
Impact	4.34 ft lb 5.88 N-m
Impact Test Method	FOTP-25 IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1-2, Section 11
Water Penetration	24 h
Water Penetration Test Method	FOTP-82 IEC 60794-1-2, Section 24

Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-28 IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1-2, Section 22

Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-104-696-2001 Telcordia GR-20-CORE Issue 3 (water penetration) Telcordia GR-409-CORE Issue 2
-------------------------------	---

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



Included Products

CS-5L-TB (Product Component—not orderable) — LazrSPEED® 300 OM3 Multimode Fiber