


760037168 | P-002-OD-8W-FSUBK  
Indoor/Outdoor Plenum Distribution Cable, 2 fiber single-unit

## Representative Image

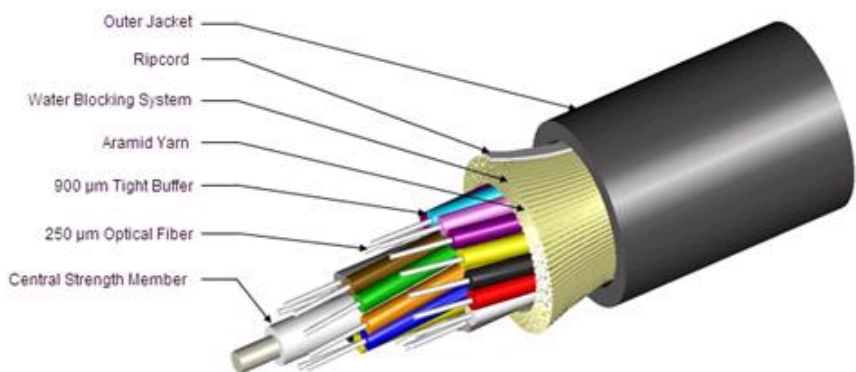

## General Specifications

Cable Type	Distribution
Construction Type	Non-armored

## Construction Materials

Fiber Type Solution	TeraSPEED®, zero water peak singlemode fiber
Total Fiber Quantity	2
Fiber Type	TeraSPEED®, zero water peak singlemode fiber
Fiber Type, quantity	2
Jacket Color	Black
Jacket UV Resistance	UV stabilized

## Dimensions

Cable Weight	10.8 lb/kft   16.0 kg/km
Diameter Over Jacket	4.20 mm   0.17 in

## Physical Specifications

Minimum Bend Radius, loaded	6.4 cm   2.5 in
Minimum Bend Radius, unloaded	4.2 cm   1.7 in
Tensile Load, long term, maximum	67 lbf   300 N
Tensile Load, short term, maximum	225 lbf   1001 N

760037168 | P-002-OD-8W-FSUBK

Vertical Rise, maximum 500.0 m | 1640.4 ft

## Flame Test Specifications

Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 262

## Environmental Specifications

Environmental Space	Plenum
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

## Mechanical Test Specifications

Compression	126 lb/in   22 N/mm
Compression Test Method	FOTP-41   IEC 60794-1-2, Section 7
Flex	100 cycles
Flex Test Method	FOTP-104   IEC 60794-1-2, Section 10
Impact	4.34 ft lb   5.88 N-m
Impact Test Method	FOTP-25   IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1-2, Section 11
Water Penetration	24 h
Water Penetration Test Method	FOTP-82   IEC 60794-1-2, Section 24

## Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-28   IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1-2, Section 22

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-104-696-2001   Telcordia GR-20-CORE Issue 3 (water penetration)   Telcordia GR-409-CORE Issue 2
-------------------------------	---

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



## Included Products

---

CS-8W-TB (Product Component—not orderable) — TeraSPEED® Singlemode Fiber