

<HAR> Hook-up Wire

H05V-K, UL Style 1007 + 1569, UL/CSA

H07V-K, UL Style 1015 + 1063, UL (MTW)/ CSA



<HAR> CE RoHS

This hook-up wire has international approvals to satisfy the requirements of both North America and Europe. It passes <HAR> H05V-K, <HAR> H07V-K, UL AWM, UL MTW (16 AWG and larger), CSA TEW and CE.

Recommended Applications:

Panel and machine wiring for domestic and export usage. Electronic equipment, Medical Equipment, and Wire bundling

Application Advantage:

- One inventory vs. two for domestic and export consumption
- 13 color code options
- UL MTW for 16 AWG and larger
- Available in large cardboard barrels for easy pull (16 AWG MTW and larger only) Call your sales representative for P/N and availability

<HAR> Hook-up Wire Construction:


Finely stranded tinned copper conductors; PVC insulation

Color Code:

00= Green/Yellow	07= Violet
01= Black	08= Pink
02= Blue	09= Orange
03= Brown	10= Yellow **
04= Red	11= Green **
05= White	14= Dark Blue
06= Gray	



Cable Attributes, See Page 653

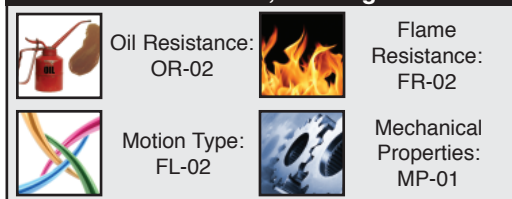

Complete the installation with:



Technical Data:

Temperature Range: HAR/IEC: -40°C to +70°C UL/CSA: -40°C to +105°C	Stranding: Fine wire per VDE 0295, Class 5
Test Voltage: 2500V	Approvals: UL: H05V-K: AWM Style 1007 + 1569 H07V-K: 1063 MTW Listed, 1015 AWM CSA: TEW Additional: <HAR> H05V-K & H07V-K
Nominal Voltage: HAR/IEC: H05V-K: 300/500V UL/CSA: 300V H07V-K: 450/750V 600V	

Part Number	Nominal Outer Diameter inches mm	Copper Weight lbs/mft	Approx. Weight lbs/mft kg/km	Part Number	Nominal Outer Diameter inches mm	Copper Weight lbs/mft	Approx. Weight lbs/mft kg/km
H05V-K				8 AWG (10 mm ²)			
22 AWG (0.50 mm ²)				41608..	.268 6.8	65	80.7 120
41804..	.087 2.2	3	5.8 9	6 AWG (16 mm ²)			
20 AWG (0.75 mm ²)				*41609..	.350 8.9	103	124.3 185
41805..	.094 2.4	5	7.5 11	4 AWG (25 mm ²)			
18 AWG (1.00 mm ²)				41610..	.398 10.1	161	174.8 260
41806..	.098 2.5	6	9.1 14	2 AWG (35 mm ²)			
H07V-K				41611..	.449 11.4	226	242.0 360
16 AWG (1.50 mm ²)				1 AWG (50 mm ²)			
41604..	.122 3.1	10	13.4 20	*41612..	.551 14.0	323	359.6 535
14 AWG (2.50 mm ²)				2/0 AWG (70 mm ²)			
41605..	.146 3.7	16	20.8 31	*41613..	.622 15.8	452	494.0 735
12 AWG (4 mm ²)				3/0 AWG (95 mm ²)			
41606..	.173 4.4	26	30.2 45	41614..	.713 18.1	613	625.1 930
10 AWG (6 mm ²)				4/0 AWG (120 mm ²)			
41607..	.193 4.9	39	42.3 63	41615..	.764 19.4	774	779.7 1160

NOTE: To develop the Lapp part number - add the double digit color code to the above part number prefix.

For example: 16AWG H07V-K Green/ Yellow: 4160400

* In accordance to the HAR standards X07V-K without "HAR"- printing. ** For these colors no HAR-approval for 1.5 mm² or larger