
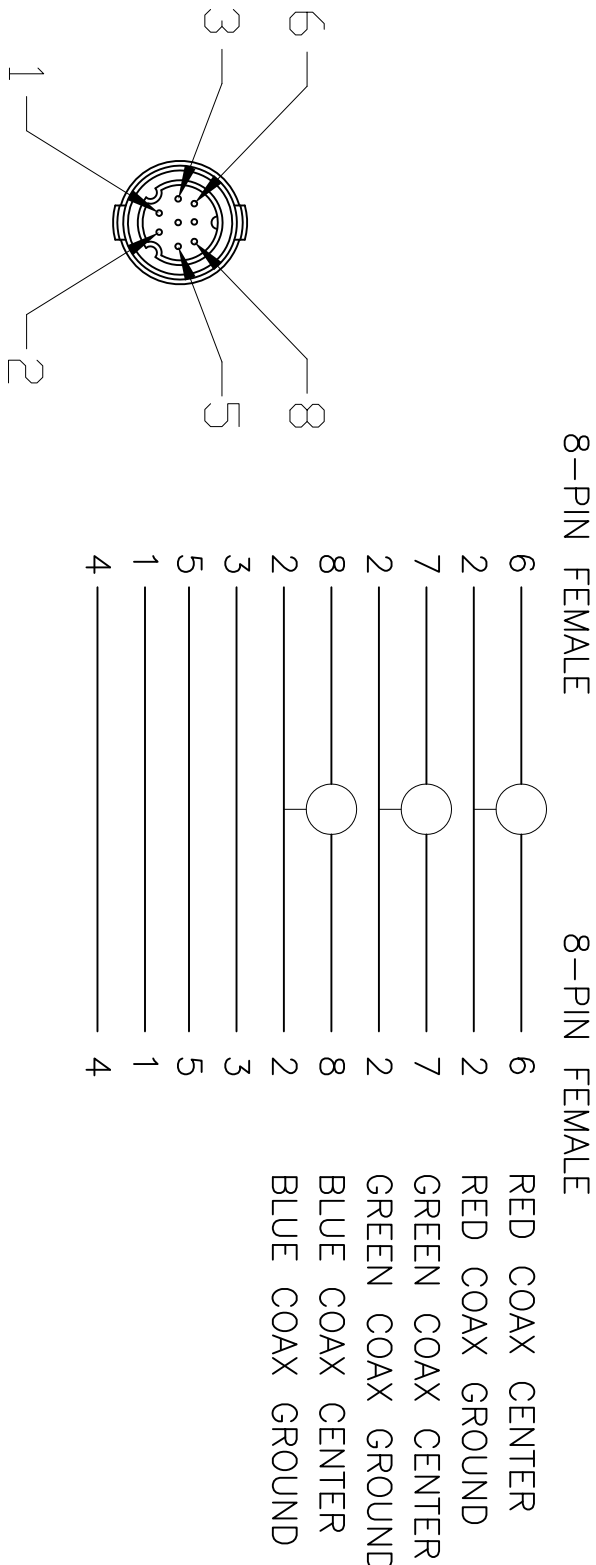


ITEM NO.	DESCRIPTION	QTY.
1	8-PIN MALE DIN CONNECTOR	2
2	MINI COAX, 75 Ohm, NON-PLENUM	'xx' FT
3	PROTECTIVE CAP (NOT SHOWN)	2
4	SHRINK WRAP (NOT SHOWN)	2
5	3.5mm STEREO JACK (VGA36xxBK ONLY)	2



CATALOG NUMBER	COLOR	AVAILABLE LENGTHS IN FEET									
VGA6xxBK	BLACK	05	10	15	20	25	30	35	40	45	50
		55	60	65	70	75	80	85	90	95	100
VGA36XXBK	BLACK	05		15		25		35			50
						75					100

* TO ORDER A SPECIFIC LENGTH, REPLACE THE 'xx' IN THE CATALOG NUMBER WITH LENGTH VALUE FROM TABLE

PIN OUT DETAIL

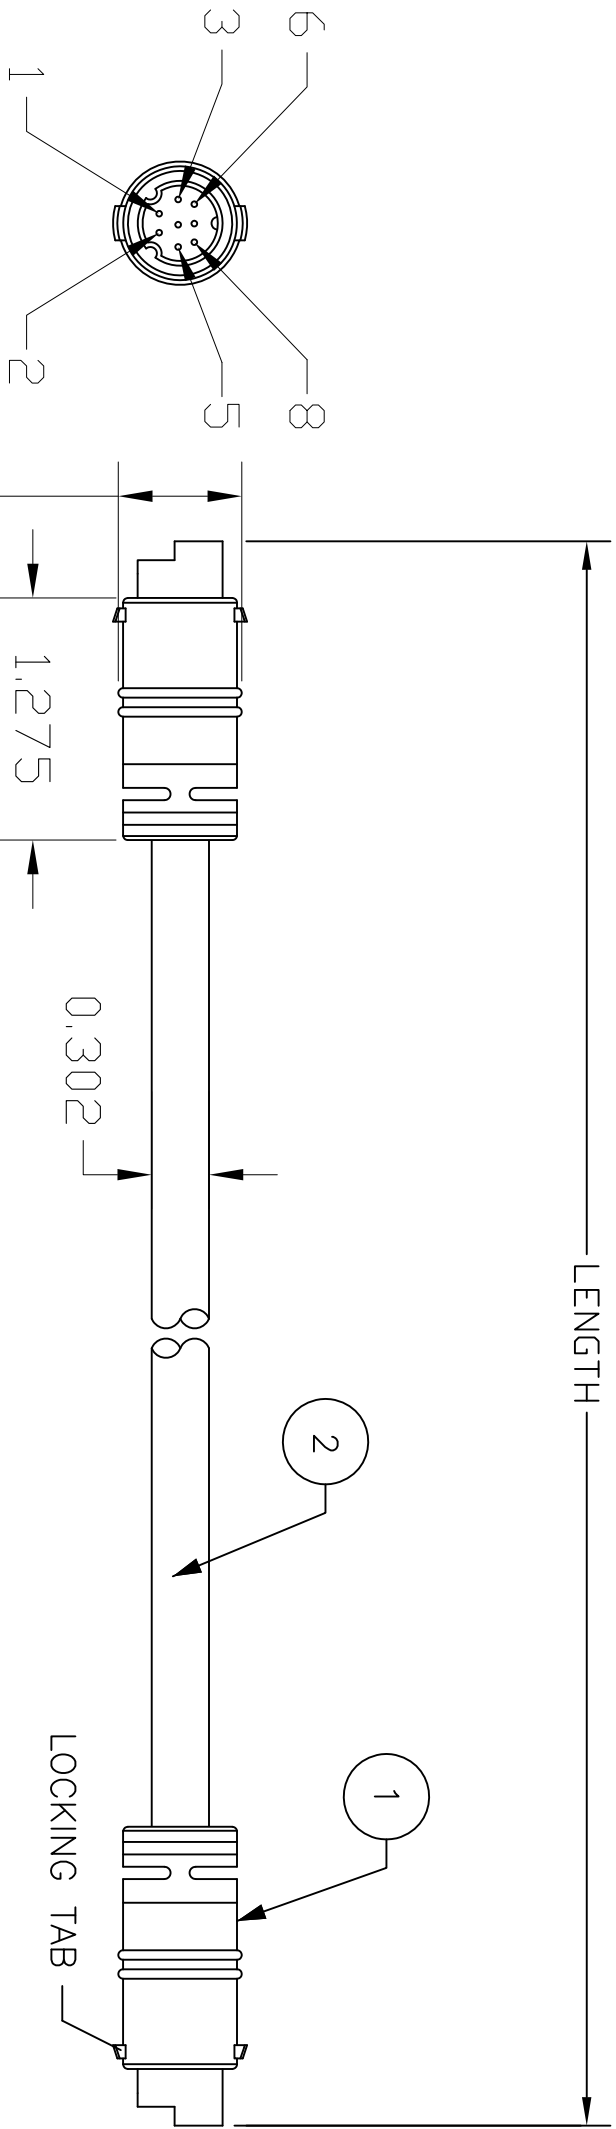

SHELL _____ DRAIN+BRAID _____ SHELL _____

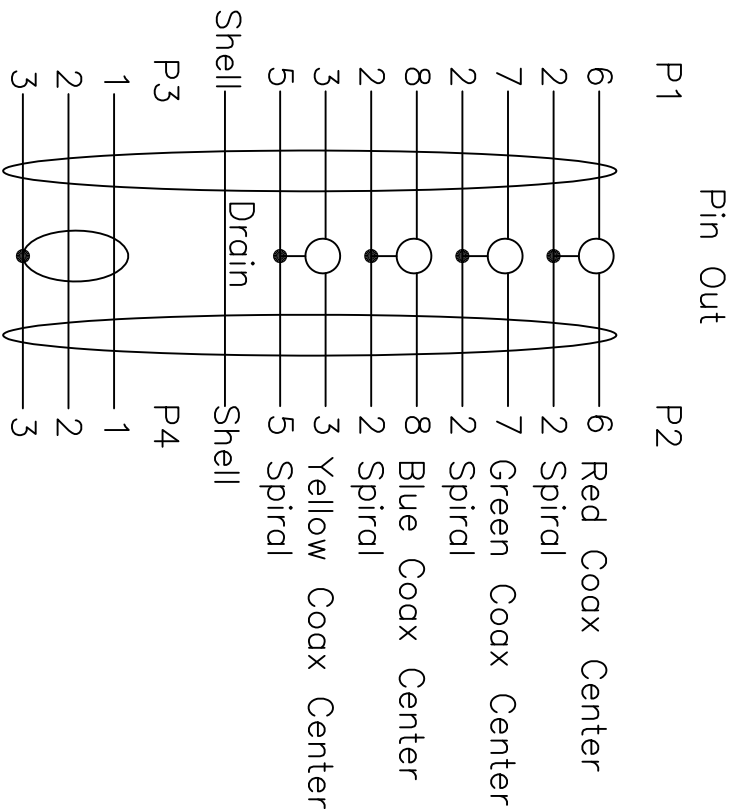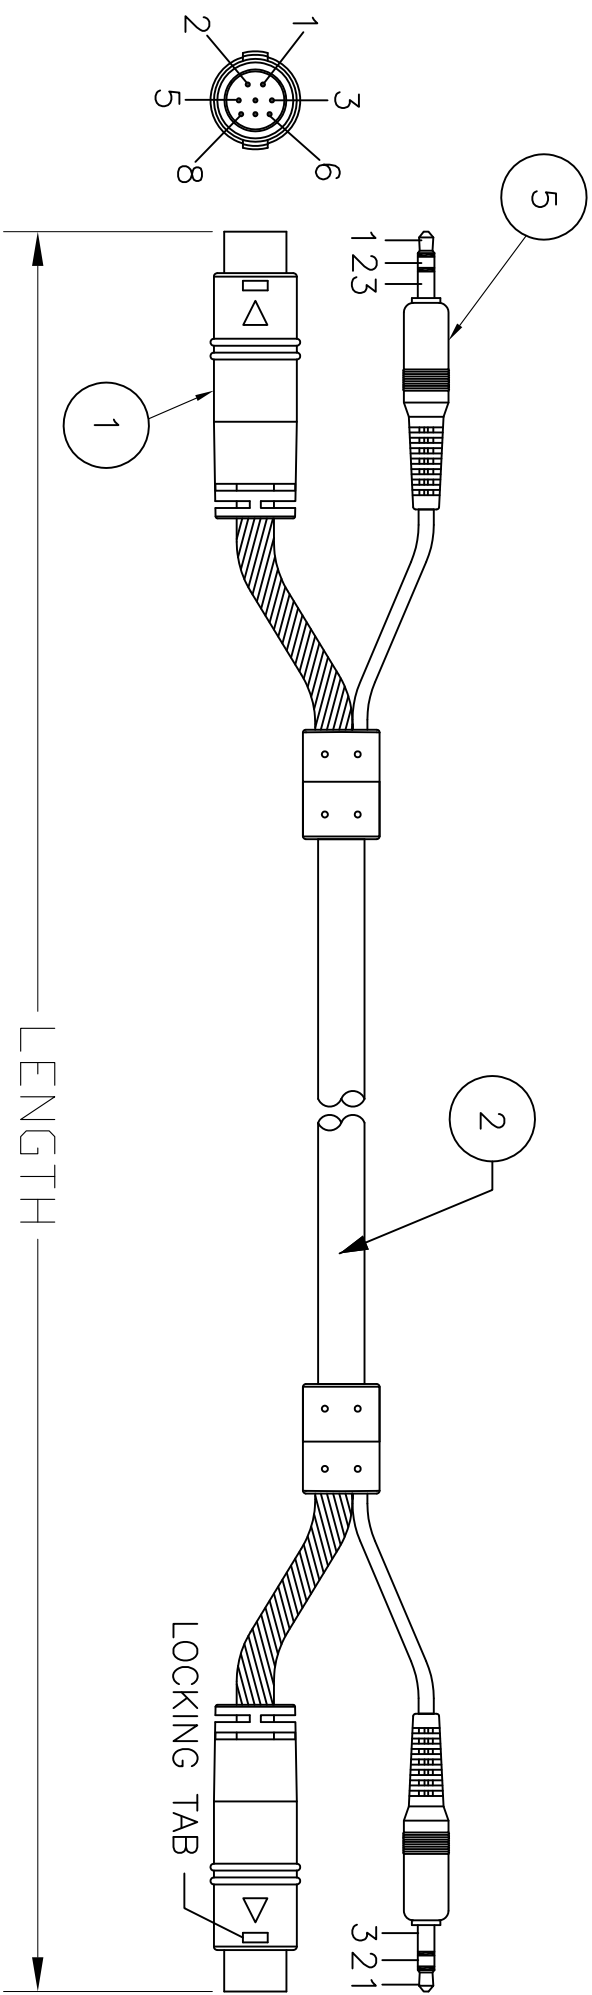

NOTES:

1. ALL CONTACTS: GOLD PLATED 2u".
2. CABLE IS MINI COAXIAL CABLE, 75 Ohm, NON-PLENUM
3. FOR USE WITH VIDEO DISTRIBUTION DEVICES SUCH AS PROJECTORS, CAMERAS, AND COMPUTERS.
4. PROTECTIVE CAP AND SHRINK WRAP NOT TO BE REMOVED UNTIL CABLE INSTALLATION IS COMPLETE.
5. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTIFICATION.

REV.	ECN	DATE	DESCRIPTION	CHG BY	APPD BY
C	17095	6/16/11	ADDED VGA36 CATALOG NUMBER	CG	

Created on AUTOCAD		DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1982 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM). TOLERANCES XX = ±.01 (.25) .XXX = ±.005 (.127) .XXXX = ±.0025 (.0635) ANGLE TOL ±1°		PROJECT REFERENCE: 2005-020		DRAWN BY: C. DUSSAULT 10/6/06		CHECKED BY:		APPROVED BY:		TITLE: VGA PATCH CORD 8-PIN MALE TO 8-PIN MALE WITH MINI COAX CABLE		Hubbell Premise Wiring HUBBELL INCORPORATED (Delaware) 14 Lord's Hill Road, Stonington, Connecticut 06378	
IN ACCEPTING OUR DRAWINGS, BLUEPRINTS, OR SUPPORTING DOCUMENTATION FOR QUOTATION OR OTHER PURPOSES, YOU AGREE NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGNS SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION		MATERIAL: SEE NOTES		SIZE: DRAWING NO. C HWS12460C		SCALE: N/A		SHEET 1 OF 1		REV. C					