


760070318 | Z-024-DS-6F-FSUBK  
Indoor/Outdoor Low Smoke Zero Halogen Riser Distribution Cable, 24 fiber single-unit

## Representative Image

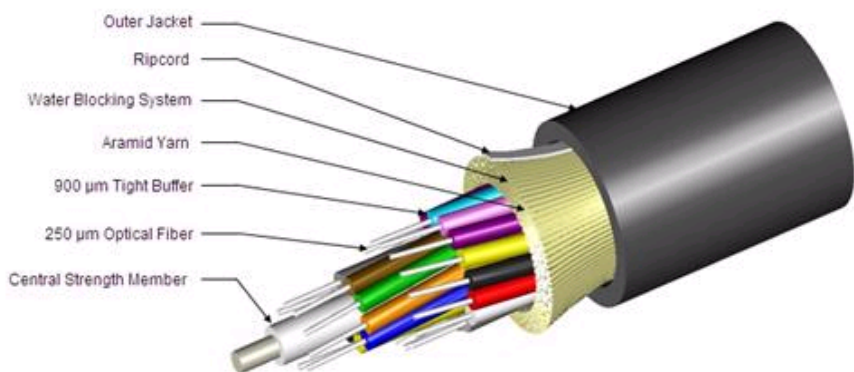

## General Specifications

Cable Type	Distribution
Construction Type	Non-armored

## Construction Materials

Fiber Type Solution	OptiSPEED®, 62.5 µm multimode fiber
Total Fiber Quantity	24
Fiber Type	OptiSPEED®, 62.5 µm multimode fiber
Fiber Type, quantity	24
Jacket Color	Black
Jacket UV Resistance	UV stabilized

## Dimensions

Cable Weight	45.0 lb/kft   67.0 kg/km
Diameter Over Jacket	8.70 mm   0.34 in

## Physical Specifications

Minimum Bend Radius, loaded	13.0 cm   5.1 in
Minimum Bend Radius, unloaded	8.7 cm   3.4 in
Tensile Load, long term, maximum	90 lbf   400 N
Tensile Load, short term, maximum	300 lbf   1335 N

760070318 | Z024-DS-6FFSUBK

Vertical Rise, maximum 500.0 m | 1640.4 ft

## Flame Test Specifications

Flame Test Listing	NEC OFNR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3   IEC 60754-2   IEC 61034-2   IEEE 383   UL 1666   UL 1685

## Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH)   Riser
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

## Mechanical Test Specifications

Compression	126 lb/in   22 N/mm
Compression Test Method	FOTP-41   IEC 60794-1-2, Section 7
Flex	100 cycles
Flex Test Method	FOTP-104   IEC 60794-1-2, Section 10
Impact	4.34 ft lb   5.88 N-m
Impact Test Method	FOTP-25   IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1-2, Section 11
Water Penetration	24 h
Water Penetration Test Method	FOTP-82   IEC 60794-1-2, Section 24

## Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-28   IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1-2, Section 22

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-104-696-2001   EN 187105   Telcordia GR -20-CORE Issue 3 (water penetration)   Telcordia GR -409-CORE Issue 2
-------------------------------	---

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



## Included Products

---

CS-6F-TB (Product Component—not orderable) — OptiSPEED® OM1 Multimode Fiber