




760149203 | P-048-OZ-5K-FMUBK

Indoor/Outdoor Plenum Distribution Cable, interlocking aluminum armored with plenum jacket, 48 fiber multi-unit with 12 fiber subunits

Representative Image

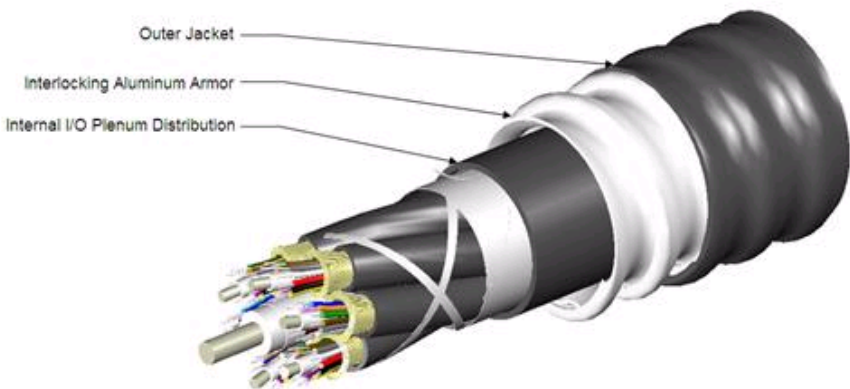

General Specifications

Cable Type	Distribution
Construction Type	Armored
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	LazrSPEED® 550, 50 µm multimode fiber
Total Fiber Quantity	48
Armor Type	Interlocking aluminum
Fiber Type	LazrSPEED® 550, 50 µm multimode fiber
Fiber Type, quantity	48
Fibers Per Subunit, quantity	12
Jacket Color	Black
Jacket UV Resistance	UV stabilized

Dimensions

Buffer Tube/Subunit Diameter	6.90 mm 0.27 in
Cable Weight	400.0 lb/kft 595.0 kg/km
Diameter Over Armor	24.77 mm 0.98 in
Diameter Over Jacket	26.80 mm 1.06 in
Subunit, quantity	4

Physical Specifications

Minimum Bend Radius, loaded	53.6 cm		21.1 in
Minimum Bend Radius, unloaded	37.5 cm		14.8 in
Tensile Load, long term, maximum	90 lbf		400 N
Tensile Load, short term, maximum	300 lbf		1335 N
Vertical Rise, maximum	69.0 m		226.4 ft

Flame Test Specifications

Flame Test Listing	NEC OFCP (ETL) and c(ETL)
Flame Test Method	NFPA 262

Environmental Specifications

Environmental Space	Plenum
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

Mechanical Test Specifications

Compression	485 lb/in		85 N/mm
Compression Test Method	FOTP-41		IEC 60794-1-2, Section 7
Flex	25 cycles		
Flex Test Method	FOTP-104		IEC 60794-1-2, Section 10
Impact	25.80 ft lb		35.00 N-m
Impact Test Method	FOTP-25		IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads		
Strain Test Method	FOTP-33		IEC 60794-1-2, Section 5
Twist	10 cycles		
Twist Test Method	FOTP-85		IEC 60794-1-2, Section 11
Water Penetration	24 h		
Water Penetration Test Method	FOTP-82		IEC 60794-1-2, Section 24

Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-28 IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1-2, Section 22

Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-104-696-2001 Telcordia GR-20-CORE Issue 3 (water penetration for internal cable) Telcordia GR-409-CORE Issue 2
-------------------------------	--

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



Included Products

CS-5K-TB (Product Component—not orderable) — LazrSPEED® 550 OM4 Multimode Fiber