


Product Data Sheet

3321 (0.030 in. Wall, 600 V)

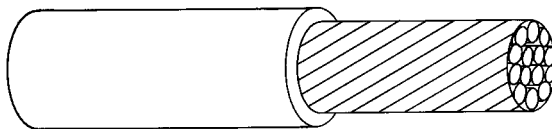

Product Description

XLPE insulation
Stranded or solid conductor
UL AWM
CSA AWM

Applications

Internal wiring of electrical and electronic appliances.

Specifications

- CONDUCTOR: Tinned copper
- INSULATION: Cross-Linked Polyethylene (XLPE), chemical
- STANDARDS: UL recognized AWM Style 3321 per UL 758 requirements. CSA Type CL 1503 and AWM I A/B
- TEMPERATURE RATING: 150°C
- VOLTAGE RATING: 600 V

All part numbers require color code designation. Solid colors with extruded parallel stripes available.

Part No.	Conductor AWG	Stranding No. x AWG	Wire O.D.	Approx. Wt. lb./1,000 ft.
3321-22/7-XX	22	7x30	0.094	5.5
3321-20/10-XX	20	10x30	0.102	7
3321-18/16-XX	18	16x30	0.113	9.9
3321-16/26-XX	16	26x30	0.123	13.7
3321-14/41-XX	14	41x30	0.138	19.4
3321-12/65-XX	12	65x30	0.160	28.3
3321-10/105-XX	10	105x30	0.185	43