Number of contacts

4/2 + ⏚

Identification	Part number Male insert (M)	Part number Female insert (F)	Drawing	Dimensions in mm
Crimp terminal Order crimp contacts separately	**09 12 006 3041**	**09 12 006 3141**		

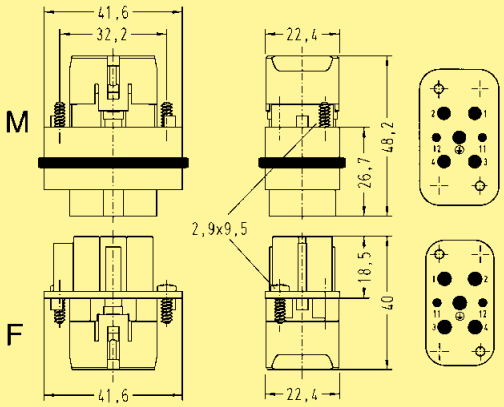

Contact arrangement view from termination side

Identification	Wire gauge (mm²)	Part number Male contact	Part number Female contact	Drawing	Dimensions in mm
Crimp contacts					
Han® C contacts Power contacts silver plated	1.5	**09 32 000 6104**	**09 32 000 6204**		
	2.5	**09 32 000 6105**	**09 32 000 6205**		
	4	**09 32 000 6107**	**09 32 000 6207**		
	6	**09 32 000 6108**	**09 32 000 6208**		
Han D® contacts Signal contacts					
silver plated	0.14-0.37	**09 15 000 6104**	**09 15 000 6204**		
	0.5	**09 15 000 6103**	**09 15 000 6203**		
	0.75	**09 15 000 6105**	**09 15 000 6205**		
	1	**09 15 000 6102**	**09 15 000 6202**		
	1.5	**09 15 000 6101**	**09 15 000 6201**		
	2.5	**09 15 000 6106**	**09 15 000 6206**		
gold plated	0.14-0.37	**09 15 000 6124**	**09 15 000 6224**		
	0.5	**09 15 000 6123**	**09 15 000 6223**		
	0.75	**09 15 000 6125**	**09 15 000 6225**		
	1	**09 15 000 6122**	**09 15 000 6222**		
	1.5	**09 15 000 6121**	**09 15 000 6221**		
	2.5	**09 15 000 6126**	**09 15 000 6226**		

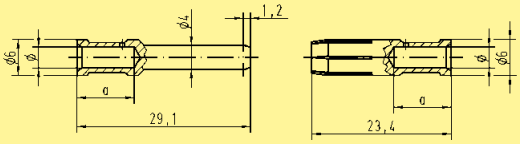

Wire gauge			∅	Stripping length
1.5	mm²	AWG 16	1.75	9 mm
2.5	mm²	AWG 14	2.25	9 mm
4	mm²	AWG 12	2.85	9.6 mm
6	mm²	AWG 10	3.5	9.6 mm

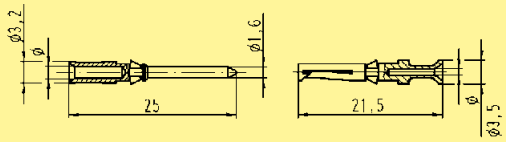

Wire gauge			∅	Stripping length
0.14-0.37	mm²	AWG 26-22	0.9	8 mm
0.5	mm²	AWG 20	1.1	8 mm
0.75	mm²	AWG 18	1.3	8 mm
1	mm²	AWG 18	1.45	8 mm
1.5	mm²	AWG 16	1.75	8 mm
2.5	mm²	AWG 14	2.25	6 mm

Stock items in bold type