Number of contacts

24 + ⏚

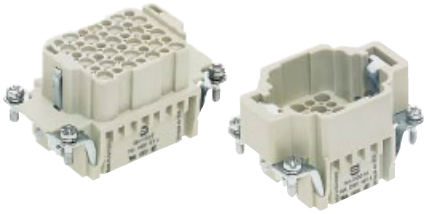

Inserts

Identification	Series	Part number Male insert (M)	Part number Female insert (F)	Drawing / Dimensions in mm
Crimp terminal Order crimp contacts separately (see Technical characteristics on page 02.06) 	Han DD®	**09 16 024 3001**	**09 16 024 3101**	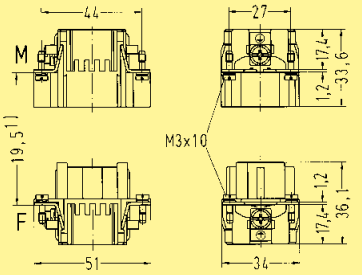 1) Distance for contact max. 21 mm Contact arrangement view from termination side  Panel cut out for inserts for use without hoods/housings 
Coding pin 			09 33 000 9915	Coding pin  Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.

Stock items in bold type