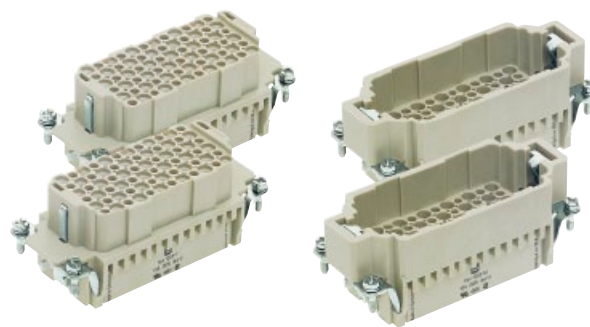
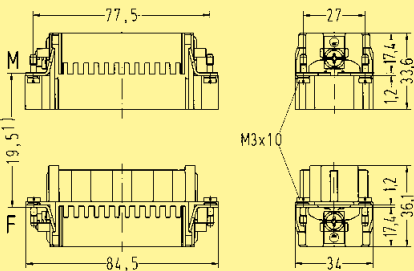
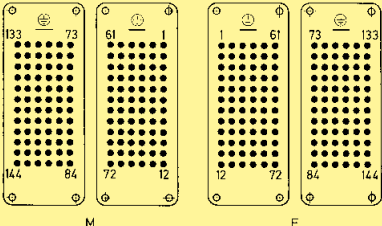



Number of contacts

144 +

Inserts

Han
D/DD

Identification	Series	Part number		Drawing	Dimensions in mm
		Male insert (M)	Female insert (F)		
Crimp terminal Order crimp contacts separately (see Technical characteristics on page 02.06) 	Han DD® 1 - 72 73 - 144	09 16 072 3001 09 16 072 3011	09 16 072 3101 09 16 072 3111	 1) Distance for contact max. 21 mm Contact arrangement view from termination side  Panel cut out for inserts for use without hoods/housings 	
Coding pin 			09 33 000 9915	Coding pin  Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.	

Stock items in bold type