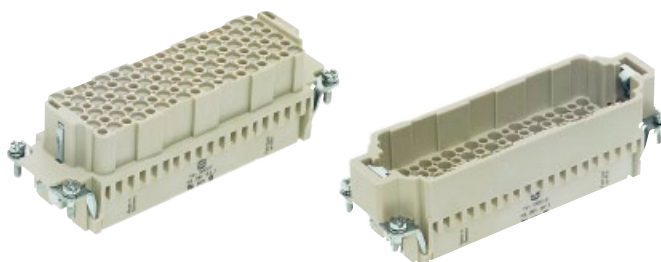


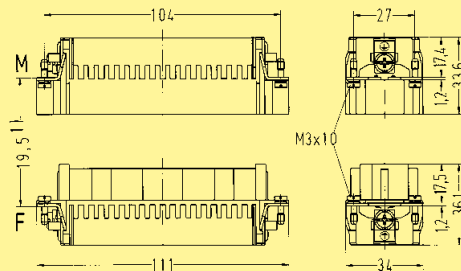



Number of contacts

108 +



Inserts

Han
D/DD

Identification	Series	Part number		Drawing	Dimensions in mm
		Male insert (M)	Female insert (F)		
Crimp terminal Order crimp contacts separately (see Technical characteristics on page 02.06) 	Han DD®	09 16 108 3001	09 16 108 3101	 1) Distance for contact max. 21 mm Contact arrangement view from termination side  Panel cut out for inserts for use without hoods/housings 	
Coding pin 			09 33 000 9915	 Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.	

Stock items in bold type