

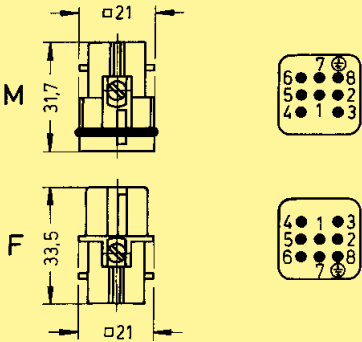
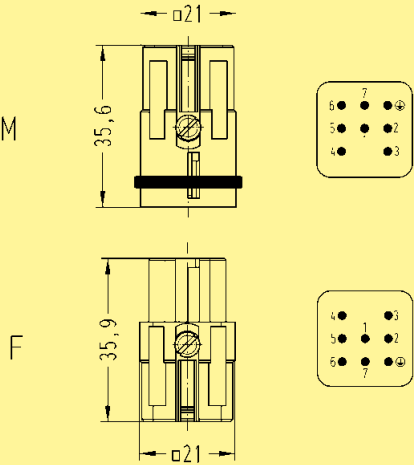
Number of contacts

7 +



Inserts

Han
D/DD

Identification	Series	Part number		Drawing	Dimensions in mm
		Male insert (M)	Female insert (F)		
Crimp terminal Order crimp contacts separately (see Technical characteristics on page 02.04)  Attention Only for thermoplastic hoods/housings	Han D®	09 21 007 3031	09 21 007 3131	Contact arrangement view from termination side 	
Han® 7 D Quick Lock  Attention Only for thermoplastic hoods/housings	Han D®	09 21 007 2632	09 21 007 2732	Contact arrangement view from termination side 	
Coding pin 			09 33 000 9915	Coding pin  Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.	

Stock items in bold type