

## M12-Splitters/T-Connectors


### ASBS 2 M12-S2326 | ASBS 2 M12-S2325



#### M12 Male to 2xM12 Female

Splitter/T-connector, two way, 4-poles with one M12 male connector and two M12 female connectors.


#### ASBS 2 M12-S2326

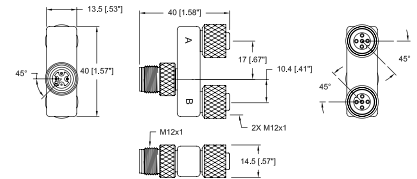

#### M12 Male to 2xM12 Female

Splitter/T-connector, two way, 5-poles with one M12 male connector and two M12 female connectors.

#### ASBS 2 M12-S2325

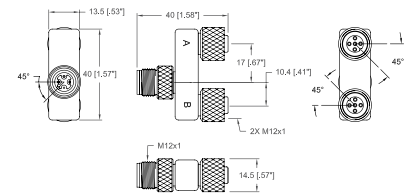

## Pin Assignments

### Face Views

#### ASBS 2 M12-S2326



#### A



#### B



#### ASBS 2 M12-S2325



#### A




#### B




### Wiring Diagrams

#### ASBS 2 M12-S2326



#### ASBS 2 M12-S2325





Be Certain with Belden

## M12-Splitters/T-Connectors

ASBS 2 M12-S2326 | ASBS 2 M12-S2325

### Technical Data

#### Environmental

Degree of protection IP 67 / NEMA 6P  
Operating temperature range -15°C (+5°F) / +90°C (+194°F)

#### Mechanical

Molded body PUR, black  
Insert PUR, black  
Contact Brass, gold over nickel plated  
Coupling nut Brass, nickel-plated  
O-ring FKM

#### Electrical

Contact resistance  $\leq 5 \text{ m}\Omega$   
Current rating 4 A  
Voltage rating 250 V

Part Number	Pins	Characteristics
ASBS 2 M12-S2326	4	 
ASBS 2 M12-S2325	5	 