

ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable

24 F, Single-mode (OS2)

CORNING

Corning Cable Systems ALTOS® Gel-Free Double-Jacket, Dielectric Cables are designed for duct and aerial (lashed) installation. The double-jacket construction adds a layer of protection for harsh environments. The loose tube cable design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

Features and Benefits

Two jacket layers

Provides extra protection in harsh environments

Flexible, craft-friendly buffer tubes

Easy to route in closures

Gel-free waterblocking technology

Craft friendly cable preparation

Medium-density polyethylene jacket

Rugged, durable and easy to strip while providing superior protection against UV radiation, fungus, abrasion and other environmental factors

Exceeds the RDUP requirements for midspan buffer tube slack storage

Provides flexibility for midspan access applications



Standards

Approval and Listings

RDUP (RUS) Listed
Material acceptability

Design and Test Criteria

ANSI/ICEA S-87-640

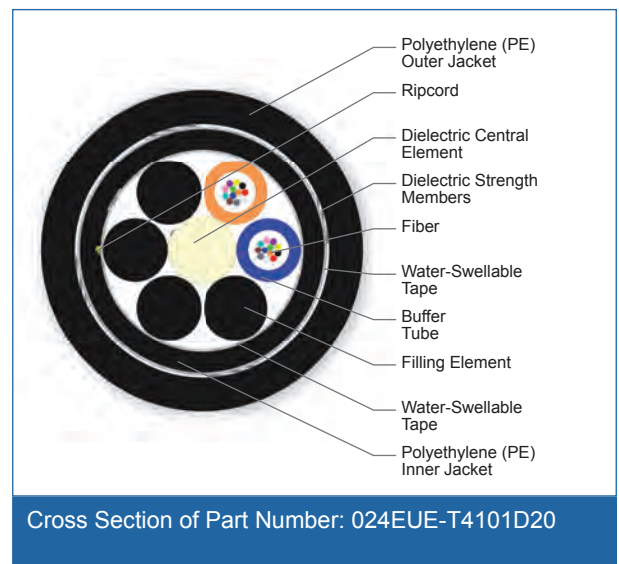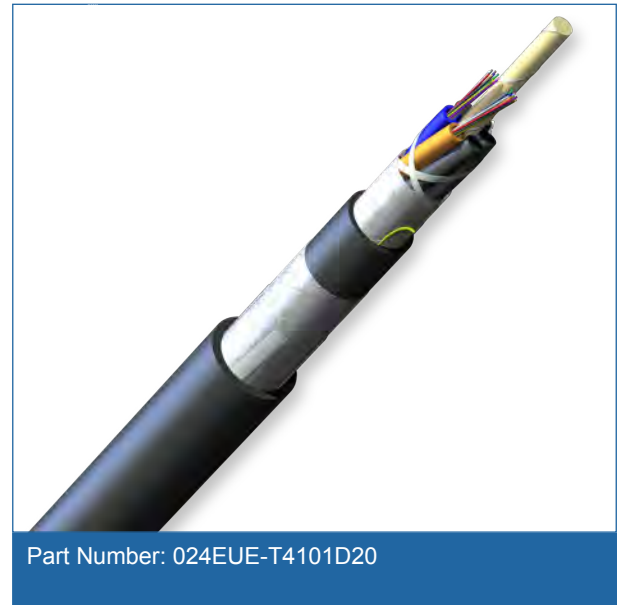

ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable

24 F, Single-mode (OS2)

CORNING

Specifications

General Specifications

Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	Single-mode (OS2)

Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	24
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	2
Buffer Tube Color Coding	Blue, Orange
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	4
Tape	Water-swellaable
Inner Jacket Material	Polyethylene (PE)
Tape, Layer 2	Water-swellaable
Number of Ripcords	1
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black

Mechanical Characteristics Cable

Max. Tensile Strengths, Short-Term	2700 N (600 lbf)
Max. Tensile Strengths, Long-Term	890 N (200 lbf)

ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable

24 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Weight	107 kg/km (72 lb/1000 ft)
Nominal Outer Diameter	12.5 mm (0.49 in)
Min. Bend Radius Installation	188 mm (7.4 in)
Min. Bend Radius Operation	125 mm (4.9 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Type	Single-mode
Fiber Core Diameter	8.2 µm
Fiber Category	OS2
Fiber Code	E
Performance Option Code	01
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Serial 1 Gigabit Ethernet	5000 m / - / -
Serial 10 Gigabit Ethernet	10000 m / - / 40000 m

* ITU-T G.652 D compliant.

* Meets 0.75 ns optical skew when used in all Corning Cable Systems Plug & Play™/Pretium EDGE® Systems Solutions.

Notes: 1) Improved attenuation and bandwidth options available.
2) Bend-insensitive single-mode fibers available on request.
3) Contact a Corning Cable Systems Customer Care Representative for additional information.

Ordering Information

Part Number	024EUE-T4101D20
Product Description	ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable, 24 F, Single-mode (OS2)

CORNING

ALTOS® Loose Tube, Gel-Free, Double-Jacket Cable

24 F, Single-mode (OS2)

CORNING

Notes



Corning Cable Systems LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/cablesystems

A complete listing of the trademarks of Corning Cable Systems is available at www.corning.com/cablesystems/trademarks.

Corning Cable Systems is ISO 9001 certified. © 2012 Corning Cable Systems. All rights reserved.

CORNING