

ALTOS® Figure-8 Gel-Free Cables, Enhanced

An Evolant®
Solutions Product

features and benefits |


Figure-8 cable design	Easy, one-step installation
Fully waterblocked loose tube, gel-free design	Simple access and no clean up
Medium density polyethylene jacket	Rugged, durable and easy to strip
Available in 62.5 µm, 50 µm, single-mode and hybrid versions	Ready for any application including Gigabit and 10 Gigabit Ethernet

Corning Cable Systems ALTOS® Figure-8 Gel-Free Cables are self-supporting aerial cables designed for easy and economical one-step installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber. The gel-free design is fully waterblocked using craft-friendly water-swappable materials, making cable access simple and requiring no clean up.

While the flexible, craft-friendly buffer tubes are easy to route in closures, the SZ-stranded, loose tube design isolates optical fibers from installation and environmental rigors and facilitates midspan access. The figure-8 cable design allows easy, one-step installation, using standard hardware and installation methods. These cables have a medium density polyethylene jacket that is rugged, durable and easy to strip.





ALTOS® Figure-8 Gel-Free Cable | Photo LAN1275

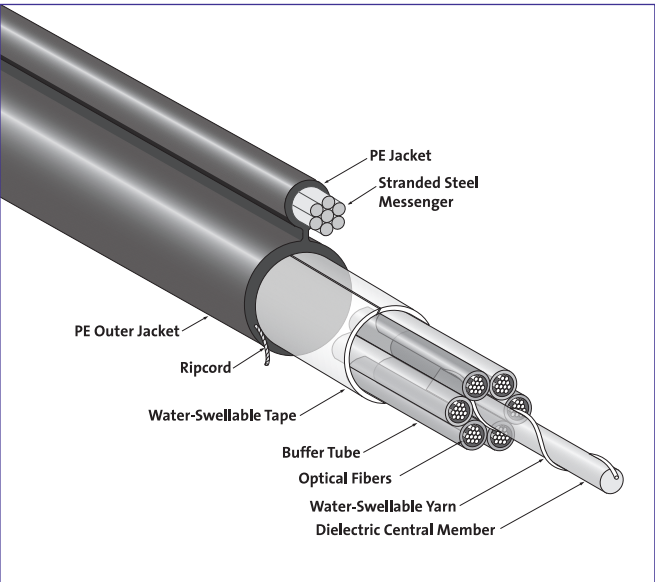

ALTOS Figure-8 Cable | Drawing ZA-3129

ALTOS® Figure-8 Gel-Free Cables, Enhanced

An Evolant®
Solutions Product

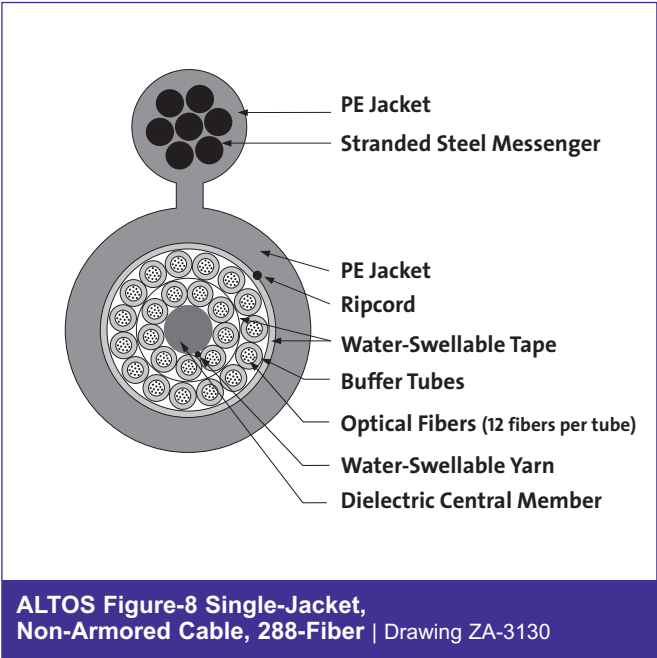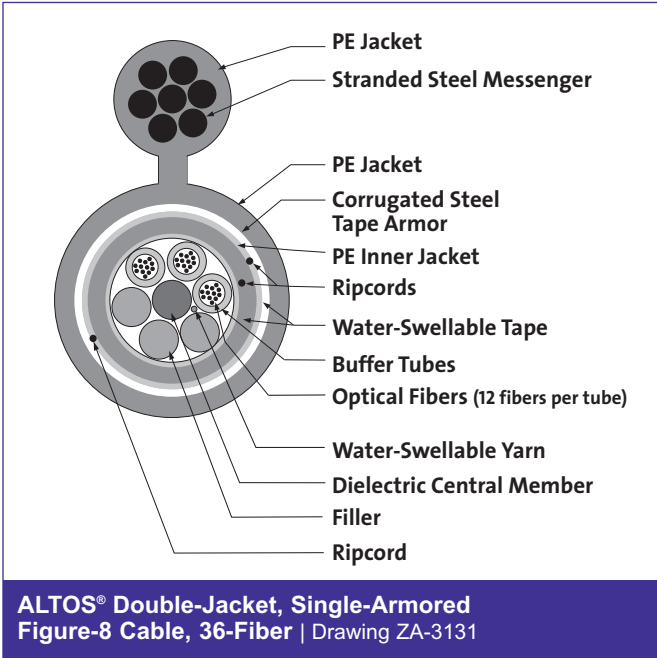

specifications |

Maximum Tensile Loads	Short-Term:	See sag and tension information
	Long-Term:	See sag and tension information
Temperatures	Storage:	-40° to +70°C (-40° to +158°F)
	Installation:	-30° to +70°C (-22° to +158°F)
	Operation:	-40° to +70°C (-40° to +158°F)
Approvals and Listings	RDUP 7 CFR 1755.900	
Common Installations	Outdoor self-supporting aerial	
Design and Test Criteria	ANSI/ICEA S-87-640	

ALTOS® Figure-8 Gel-Free Cables, Enhanced

An Evolant®
Solutions Product

specifications | (continued)

Fiber Count	Maximum Fibers per Tube	Number of Tube Positions	Number of Active Tubes	Central Member	Nominal Cable Weight kg/km (lb/1000 ft)	Nominal Outer Diameter mm (in)	Nominal Cable Height mm (in)	Minimum Bend Radius Loaded cm (in)	Minimum Bend Radius Installed cm (in)
Figure-8 (Non-Armored)									
2-72	12	6	1-6	Dielectric	297 (199)	10.5 (0.41)	22.1 (0.87)	15.8 (6.2)	10.5 (4.1)
73-96	12	8	7-8	Dielectric	321 (215)	12.2 (0.48)	23.8 (0.94)	18.3 (7.2)	12.2 (4.8)
97-144	12	12	9-12	Dielectric	386 (259)	15.8 (0.62)	27.4 (1.08)	23.7 (9.3)	15.8 (6.2)
145-216	12	18	13-18	Dielectric	371 (249)	16.0 (0.63)	27.6 (1.09)	24.0 (9.4)	16.0 (6.3)
217-288	12	24	19-24	Dielectric	420 (282)	18.2 (0.72)	29.8 (1.17)	27.3 (10.7)	18.2 (7.2)
Figure-8 (Armored)									
2-72	12	6	1-6	Dielectric	396 (266)	14.3 (0.56)	25.9 (1.02)	21.5 (8.4)	14.3 (5.6)
73-96	12	8	7-8	Dielectric	432 (290)	16.0 (0.63)	27.6 (1.09)	24.0 (9.4)	16.0 (6.3)
97-144	12	12	9-12	Dielectric	527 (353)	19.7 (0.78)	31.3 (1.23)	29.6 (11.6)	19.7 (7.8)
145-216	12	18	13-18	Dielectric	513 (344)	19.9 (0.78)	31.5 (1.24)	29.9 (11.8)	19.9 (7.8)

Maximum Span with 1% Installation Sag			
Number of Tube Positions	NESC Light m (ft)	NESC Medium m (ft)	NESC Heavy m (ft)
Figure-8 (Non-Armored)			
6	241 (790)	235 (770)	168 (550)
8	241 (790)	229 (750)	158 (520)
12	216 (710)	201 (660)	140 (460)
18	207 (680)	198 (650)	137 (450)
24	183 (600)	183 (600)	137 (450)
Figure-8 (Armored)			
6	189 (620)	189 (620)	140 (460)
8	189 (620)	186 (610)	131 (430)
10	171 (560)	162 (530)	116 (380)
18	162 (530)	158 (520)	116 (380)

ALTOS® Figure-8 Gel-Free Cables, Enhanced

An Evolant®
Solutions Product

transmission performance |

Fiber Code	K	C	E	E
Performance Option Code	30	31	01	00
Optical Fiber Type (µm)	62.5 Multimode	50 Multimode	Single-mode*	Single-mode*
ISO/IEC 11801 Nomenclature	OM1	OM2	OS2	OS2
Wavelength (nm)	850/1300	850/1300	1310/1383/1550	1310/1383/1550
Maximum Attenuation (dB/km)	3.4/1.0	3.0/1.0	0.4/0.4/0.3	0.35/0.35/0.25
Minimum Over Filled Launch (OFL) Bandwidth (MHz•km)	200/500	700/500	– / – / –	– / – / –
Minimum Effective Modal Bandwidth (EMB) (MHz•km)	220/ –	950/ –	– / – / –	– / – / –
Serial 1 Gigabit Ethernet Distance (m)	300/550	750/600	5000 / – / –	5000 / – / –
Serial 10 Gigabit Ethernet Distance (m)	33/ –	150/ –	10000/ – /40000	10000/ – /40000

* ITU 652.D compliant.

Notes:

- 1) Improved attenuation and bandwidth options available.
- 2) Contact Corning Cable Systems Customer Service Representative for additional information.

ALTOS® Figure-8 Gel-Free Cables, Enhanced

An Evolant®
Solutions Product

ordering information |

<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	U	<input type="checkbox"/>	-	T	4	1	<input type="checkbox"/>	<input type="checkbox"/>	D	2	0
1	2	3	4	5	6		7	8	9	10	11	12	13	14

|1-3

Select fiber count.

Standard offerings:

012	060	192
024	072	216
036	096	288
048	144	

See Note 1.

|4

Select fiber code
(see Transmission
Performance table).

|5 / 12

Defines cable type.

U / D = ALTOS® Gel-Free
Cable

|6

Select outer jacket.

A = Non-armored

B = Armored

See Note 2.

|7

Defines fiber placement.

T = 12 fibers per tube

|8

Defines length markings.

4 = Markings in feet
(standard)

|9

Defines tensile strength
(see Specifications).

|10-11

Select performance
option code (see
Transmission
Performance table).

|13-14

Defines special
requirements.
20 = No special
requirements

Notes:

1) 288 fibers available in
non-armored version only.

2) Use with buffer tube
fan-out kit for direct
termination applications.

notes |

notes |

An Evolant®
Solutions Product

PRETERMINATED SYSTEMS | CABLES | CONNECTORS | CABLE ASSEMBLIES | HARDWARE | COPPER CONNECTIVITY | SPICE AND TEST EQUIPMENT | TRAINING

notes |

This image shows a full page of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page, typical of notebook paper. There are no margins, text, or other markings on the page.