


ONE HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL (Continued)



45° and 90° angles are available.

Please contact Customer Service to order:
1-800-346-4175

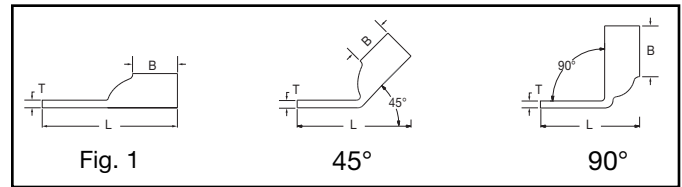

C-19

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			Dieless (# of crimps)	▲ Installation Tooling						Wire Strip Length					
		AWG	*** MM²			Hydraulic				Color Code	Die Index										
						MD6, OUR840, MD7-34R	BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750													
YA29L2	1	250 kcmil		1/4"	1.11"	1.06"	.16"	2.17"	MY29-3 (1)	W29VT (2) X29RT (4)	W29VT (2) W29RT (2) X29RT (4)	U29RT (1)	Yellow	16	1-1/8"						
YA29L4	1			3/8"	1.11"	1.06"	.16"	2.42"	MY29-11 (1)												
YA29L7	1			5/16"	1.11"	1.06"	.16"	2.30"	Y644HS (1)												
YA29LTC78	1			7/8"	1.11"	1.06"	.14"	3.36"	Y81KFT (2)												
YA29LNT38	1			3/8"	.96"	1.06"	.16"	2.96"	Y81KFTMBH (2)												
YA29L-BOX	1			1/2"	1.11"	1.06"	.16"	2.67"	PAT81KFT-18V (2)												
YA30L	1	300 kcmil	150	1/2"	1.20"	1.03"	.16"	2.69"	Y644HS (1) Y81KFT (2) Y81KFTMBH (2) PAT81KFT-18V (2)	W30VT (2)	W30VT (2) W30RT (2)	U30RT (2) U28ART (2)	White	17	1-1/16"						
YA30L1	1			5/16"	1.20"	1.03"	.16"	2.31"													
YA30L24	1			3/8"	1.20"	1.03"	.16"	2.44"													
YA30L27	1			7/8"	1.20"	1.03"	.16"	3.37"													
YA30L28	1			3/4"	1.20"	1.03"	.16"	3.12"													
YA30L7	1			5/8"	1.20"	1.03"	.16"	2.94"													
YA31L	1	350 kcmil	185	1/2"	1.29"	1.06"	.18"	2.75"		Y644HS (1) Y81KFT (2) Y81KFTMBH (2) PAT81KFT-18V (2)	W31VT (2)	W31VT (2) W31RT (2)	U31RT (2) U29ART (2)	Red	18	1-3/16"					
YA31L11	1			3/8"	1.29"	1.06"	.18"	2.50"													
YA31L36	1			7/8"	1.29"	1.06"	.18"	4.02"													
YA31L7	1			5/8"	1.29"	1.06"	.18"	3.00"													
YA31LNT38				3/8"	.96"	1.06"	.18"	3.37"													
YA32L	1			5/8"	1.38"	1.19"	.19"	3.18"													
YA32L1	1	400 kcmil		1/2"	1.40"	1.19"	.19"	2.93"	W32VT (2)		W32VT (2) W32RT (2)	U32RT (2) U30ART (2)	Blue	19	1-1/4"						
YA32L14	1			3/8"	1.38"	1.19"	.19"	2.68"													
YA32LTC78	1			7/8"	1.40"	1.19"	.19"	3.62"													
YA33L	1	450 kcmil		5/8"	1.48"	1.50"	.21"	3.57"	Y644HS (1) Y81KFT (2) Y81KFTMBH (2)		W33VT (2)	W33VT (2) W33RT (2)	U33RT (2)	Gray	326	1-9/16"					
YA34L	1	500 kcmil	240	5/8"	1.55"	1.27"	.23"	3.37"													
YA34L20	1			1"	1.55"	1.27"	.23"	4.05"													
YA34L37	1			3/8"	1.55"	1.27"	.23"	2.87"													
YA34L6	1			1/2"	1.55"	1.27"	.23"	3.12"													
YA34L8	1			3/4"	1.55"	1.27"	.23"	3.55"													
YA34L9	1			7/8"	1.55"	1.27"	.23"	3.80"													
YA35L	1	550 kcmil		5/8"	1.65"	1.69"	.25"	3.81"		—							—	U35RT (2)	Yellow	21	1-3/4"
YA36L11	1	600 kcmil	300	1/2"	1.74"	1.38"	.27"	3.29"													
YA36L	1			5/8"	1.74"	1.38"	.27"	3.72"		—							—	U36RT (2)	Green	22	1-3/4"
YA36LTC78	1	600 kcmil	300	7/8"	1.74"	1.38"	.27"	3.97"		Y644HS (1) Y81KFT (2) Y81KFTMBH (2)							—	—	U36RT (2) U32ART (2)	Green	22
YA37L	1	650 kcmil		5/8"	1.80"	1.39"	.27"	3.57"	Y644HS (1) Y81KFT (3) Y81KFTMBH (3) PAT81KFT-18V (3)	—	—	U37RT (2)	Orange	23	1-15/16"						
YA37L1	1			5/8"	1.80"	1.39"	.27"	3.76"													
YA38L	1	700 kcmil		5/8"	1.84"	1.45"	.27"	3.66"	Y644HS (1) Y81KFT (3) Y81KFTMBH (3) PAT81KFT-18V (3)	—	—	U38RT (2)	Pink	400	1-15/16"						
YA39L	1	5/8"	1.91"	1.42"	.27"	3.67"															
YA39L2	1	7/8"	1.91"	1.42"	.27"	4.10"															
YA39L9	1	1-1/4"	1.91"	1.42"	.27"	4.85"															
YA39LNT38		3/8"	1.12"	1.42"	.27"	4.70"															
YA39L6	1	1/2"	1.91"	1.42"	.27"	3.41"															

* Use PUADP-1 adapter with U dies in Y46 HYPRESS™.
** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adapter not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor.

▲ See tooling section of this catalog for complete tool and die listings.

◆ For applications greater than 2000 Volts, consult cable manufacturer for voltage stress relief instructions.

Note: All dimensions shown are for reference only.

Blue highlighted items are industry standard and most frequently ordered.