



0936 DMC 152




DeviceNet Receptacles, M12

5-Pole, Male

DeviceNet, 5-pole, male M12 receptacle, assembled THIN cable, shielded, PG 9 thread for panel mount.

0936 DMC 152

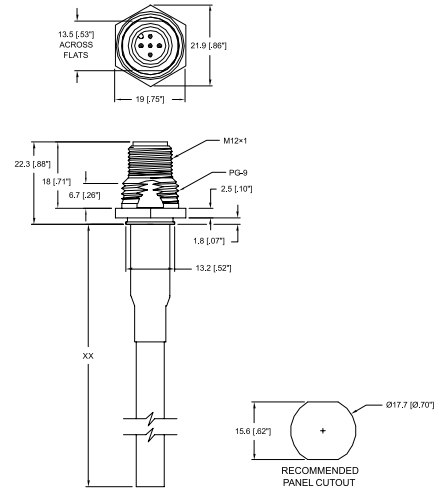

Pin Assignments

Face Views, M12

5 pole



- 1 = drain
- 2 = +24 V DC
- 3 = 0 V
- 4 = CAN_H
- 5 = CAN_L



Be Certain with Belden

DeviceNet Receptacles, M12

0936 DMC 152

Technical Data

Environmental	
Degree of protection	IP 67 / NEMA 6P
Operating temperature range	-40°C (-40°F) / +90°C (+194°F)
Mechanical	
Housing	Brass, nickel-plated
Insert	0936 DMC 152: PUR, yellow 0936 DFC 152: PUR, black
Contact	Brass, gold over nickel-plated
Panel nut	Brass, nickel plated
Electrical	
Current rating	4 A
Voltage rating	250 V
Cable Specifications	
Cable jacket	PVC, grey
Shielding	Shielded
Overall diameter	.270"
Conductor	1 Pair 22 AWG, 1 Pair 24 AWG
Cable construction	according to Devicenet THIN cable specification

Part Number	Pins	Cable Length	Characteristics
Male			
0936 DMC 152	5	2 M	 