


MC[®] 6 UTP Modular Cords - North America

Siemon's category 6 series of modular cords are key components to ensure optimum channel performance of our category 6 UTP systems. A variety of product enhancements contribute to the cord's superior performance — including 250 MHz rated stranded cordage, a patented crosspair isolator and an innovative 360° crimp, which provides excellent plug-to-cable strain relief without causing pair deformation.

The cable used to manufacture the category 6 patch cords exceeds the specifications set forth by both ANSI/TIA-568-C.2 and ISO/IEC 11801:2002.

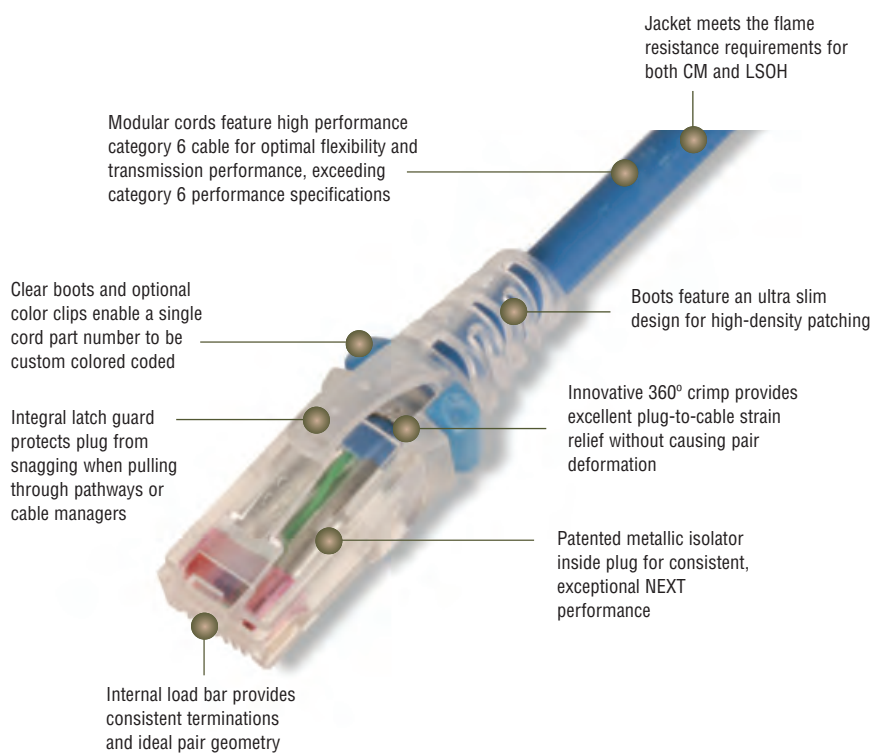

Excellent Bend Relief

Boot and integrated strain relief ensures proper bend relief, critical for category 6 performance



Color Coding

Optional colored clips enable field color coding and can easily be snapped into place without having to disconnect cords

STANDARDS COMPLIANCE

- ANSI/TIA-568-C.2
- ISO/IEC 11801
- IEEE 802.3af (PoE)
- IEEE 802.3at (PoE+)
- IEC 60603-7
- cUL US Listed
- IEC 60332-1, 60754, 61054, 61034
- TIA-968-A (formerly FCC Part 68 Subpart F)

PRODUCT INFORMATION

Performance Specifications:

ELECTRICAL	
Contact Resistance	20 mΩ
Input to Output DC Resistance	200 mΩ
Min. Dielectric Withstand Voltage (contact to contact)	1000 V DC or AC peak
Insulation Resistance	500 mΩ
Compatibility	Backwards to cat 5e
Current Rating @ 25° C	1.5 A
Power over Ethernet	Suitable for PoE and PoE+
MECHANICAL – GENERAL	
Operating Temperature	-10 to 60 °C, (14 to 140 °F)
Flammability Rating	UL 94 - V0
Green Features	RoHS, lead-free, halogen-free, PVC free
Contact Materials	Copper alloy with contact plating of 50 micro inches gold or equivalent
Plastic Materials	Flame retardant thermoplastic
Marking	P/N, length, performance level, QC
MECHANICAL – PLUG	
Number of Plug Insertion Cycles	750
Min. Plug Retention Force	50N
Plug Compatibility	Compatible with RJ45 outlets

MECHANICAL – CABLE (STRANDED)	
Wire Size Range (nominal)	26 AWG 7x34 Stranded tinned copper
Cable Construction	UTP
Cable O.D. (nominal)	5.3mm (0.20 in.)
Wiring	T568A/B
Jacket Type	CM/LSOH
Bend Radius	25mm (1.0 in.)

PATCH CORDS, PLUGS & CABLE

MC 6 UTP Modular Cords

Category 6 MC, double-ended, 4-pair UTP stranded modular patch cord, T568A/B, clear boot.

MC6-(XX)-(XX)	
Cord Length:	Cord Color:
03 = 0.9m (3 ft.)	01 = Black 04 = Gray 07 = Green
05 = 1.5m (5 ft.)	02 = White 05 = Yellow 08 = Violet
07 = 2.1m (7 ft.)	03 = Red 06 = Blue 09 = Orange
10 = 3.1m (10 ft.)	
15 = 4.6m (15 ft.)	
20 = 6.1m (20 ft.)	

ⓑ Add "B" for bulk pack of 100 modular cords.

CLIP-(XX) Color coding clip, bag of 25

Clip Color		
01 = Black	04 = Gray	07 = Green
02 = White	05 = Yellow	08 = Violet
03 = Red	06 = Blue	09 = Orange



Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

For additional resource information:

Visit our web site at www.siemon.com

North America
Watertown, CT USA
Phone (1) 860 945 4200 US
Phone (1) 888 425 6165 Canada

Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

Asia/Pacific
Shanghai, P.R. China
Phone (86) 21 5385 0303

Latin America
Bogota, Colombia
Phone (571) 657 1950