

## TWO-DOOR FREE-STAND, TYPE 4X



### INDUSTRY STANDARDS

UL 508A Listed; Type 3, 3R, 4, 4X, 12; File No. E61997  
 cUL Listed per CSA C22.2 No 94; Type 3, 3R, 4, 4X, 12; File No. E61997  
 Enclosure flammability evaluated per UL 508A

NEMA Type 3, 3R, 4, 4X, 12, 13  
 IEC 60529, IP66  
 Meets NEMA Type 3RX requirements

### APPLICATION

An economical way to house electronics in corrosive environments, two-door enclosures provide easy access to equipment, larger capacity for control systems and steel reinforcements that ensure stability and strength. These enclosures feature captivated door screws and an optional POWERGLIDE™ Handle for secure latching.

### SPECIFICATIONS

- Fiberglass-reinforced polyester material has excellent temperature and chemical resistance and exhibits outstanding physical properties
- Seams are sealed; no holes or knockouts
- Fiberglass material is easily punched, drilled, filed or sawed
- Models have either a 3-point latching system with handle or stainless steel captivated door screws
- Type 316 stainless steel POWERGLIDE Handle on handle versions
- Stainless steel captivated door screws on screw versions
- Seamless foam-in-place gasket assures a water-tight and dust-tight seal

- Painted steel top, bottom and side internal reinforcements standard; stainless steel corner reinforcements optional
- Solid centerpost (not removable) has heavy-gauge stiffener
- Heavy-duty Type 316 stainless steel lifting eyes
- Hinges are corrosion-resistant fiberglass with Type 316 stainless steel hinge pins
- Large data pocket (12.00 x 12.00 in. or 305 x 305 mm) is high-impact thermoplastic
- Molded-in angular sealing flange directs water away from gasket area
- Material is halogen free

### FINISH

Fiberglass enclosure is gray inside and out. White painted mild steel panels are included. Optional conductive panels are available.

### ACCESSORIES

*See also Accessories.*

Accessory Selection for Free-Stand, Type 4X  
 Bottom Support Kits  
 Floor Stand Kit  
 H2OMIT™ Vent Drains, Type 4X  
 H2OMIT™ Thermoelectric Dehumidifier  
 HOL-SEALERS™ Non-Metallic Hole Seals


### MODIFICATION AND CUSTOMIZATION

Hoffman excels at modifying and customizing products to your specifications. Contact your local Hoffman sales office or distributor for complete information.


**BULLETIN: A17**

### Standard Product

| Catalog Number | AxBxC in./mm                               | Number of Panels | Panel Size in./mm           |
|----------------|--|------------------|-----------------------------|
| A724925FG      | 72.00 x 49.00 x 24.50<br>1829 x 1245 x 622 | 2                | 56.00 x 22.00<br>1422 x 559 |
| A724925FGFS3PT | 72.00 x 49.00 x 24.50<br>1830 x 1245 x 622 | 2                | 56.00 x 22.00<br>1422 x 559 |

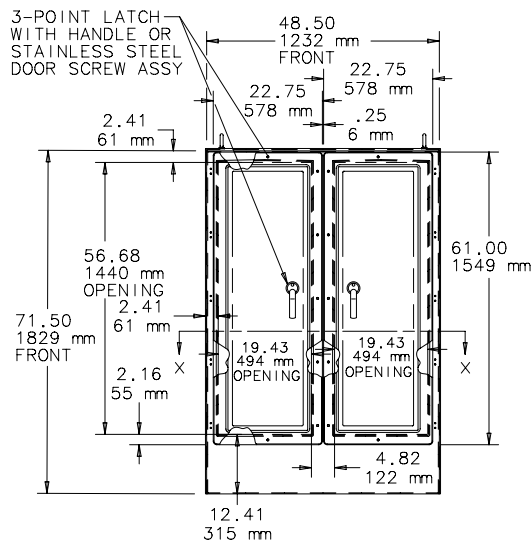


- NOTE:
- 1. Upper, middle, and lower supports as well as centerpost stiffener are steel.
  - 2. Optional Bottom Support Kit required when installing Caster, Floor-Stand Kit, or Unistrut Mounting Kit.

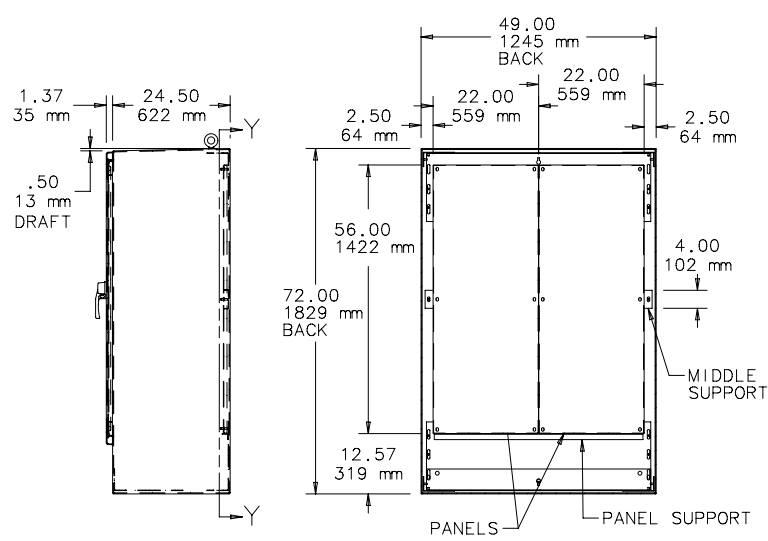

SECTION Y-Y

- NOTE:
- Section Y-Y shown with the optional Bottom Support Kit and Unistrut Mounting Kit accessories installed.

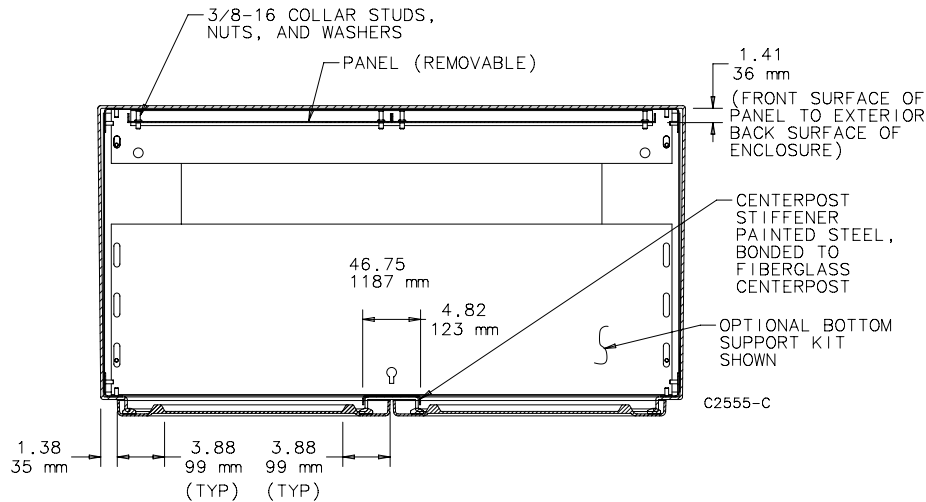

SECTION X-X

**BOTTOM SUPPORT KITS**

BULLETIN: A17Y

| Catalog Number | Description   |
|----------------|---|
| A17SUPPORT2    | Inside Bottom Support -- Enclosure bottom support to allow option of installing casters or floor stand kits |
| A17UNISTRUT    | Bolt-On Unistrut Channel (8 channels) -- Painted steel unistrut for accessory mounting                      |

A17SUPPORT2 required to install A17UNISTRUT in two-door enclosures