




760125245 | N-006-DZ-5L-FSUAQ

**Low Smoke Zero Halogen Riser Distribution Cable, interlocking aluminum armored with low smoke zero halogen riser jacket, 6 fiber single-unit**

## Representative Image

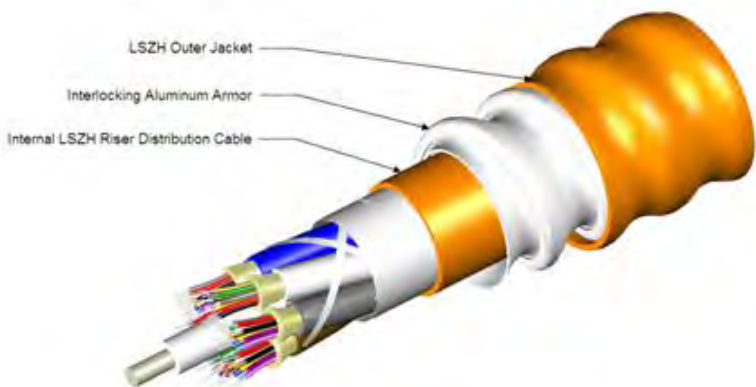

## General Specifications

Cable Type	Distribution
Construction Type	Armored
Subunit Type	Gel-free

## Construction Materials

Fiber Type Solution	LazrSPEED® 300, 50 µm multimode fiber (OM3)
Total Fiber Count	6
Armor Type	Interlocking aluminum
Fiber Type	LazrSPEED® 300, 50 µm multimode fiber (OM3)
Fiber Type, quantity	6
Jacket Color	Aqua

## Dimensions

Cable Weight	140.0 kg/km   94.0 lb/kft
Diameter Over Armor	10.80 mm   0.43 in
Diameter Over Jacket	12.80 mm   0.50 in

## Physical Specifications

Minimum Bend Radius, loaded	25.7 cm   10.1 in
-----------------------------	-------------------

760125245 | N006-DZ-5LFSUAQ

Minimum Bend Radius, unloaded	18.0 cm   7.1 in
Tensile Load, long term, maximum	45 lbf   200 N
Tensile Load, short term, maximum	150 lbf   667 N
Vertical Rise, maximum	146.0 m   479.0 ft

## Flame Test Specifications

Flame Test Listing	NEC OFCR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3   IEC 60754-2   IEC 61034-2   IEEE 383   UL 1666   UL 1685

## Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH)   Riser
Installation Temperature	-30 °C to +60 °C (-22 °F to +140 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

## Mechanical Test Specifications

Compression	485 lb/in   85 N/mm
Compression Test Method	FOTP-41   IEC 60794-1-2, Section 7
Flex	25 cycles
Flex Test Method	FOTP-104   IEC 60794-1-2, Section 10
Impact	25.80 ft lb   35.00 N-m
Impact Test Method	FOTP-25   IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1-2, Section 11

## Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1-2, Section 22

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
-------------------------------	---------------------------------------

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



## Included Products

---

CS-5L-TB (Product Component—not orderable) — LazrSPEED® 300 OM3 Bend-Insensitive Multimode Fiber