



Quam

INDIVIDUAL LOUDSPEAKERS

4C3Z80T

MOISTURE RESISTANT

4" O.D. Moisture Resistant Loudspeaker,
5 oz. magnet, 8Ω impedance

GENERAL DESCRIPTION

The **4C3Z80T** is 4" square frame loudspeaker with a 5 oz. magnet and an 8 Ohm nominal impedance.


INTENDED USE - Indoor and Outdoor Environment

Program Material	Signal tones, voice and music
Installation	Loudspeaker mount is a #8-32 tapped hole, center rear of device

AUDIO SPECIFICATIONS

Frequency Response	130 Hz - 9kHz
Power Handling ¹	10W
Impedances Available	8-Only
Cone Finish Options	Weather-Resistant
Magnet Material	Ceramic
Weight	4.8 oz
Depth	1.465 in

¹Loudspeaker Power Rating per EIA 426A

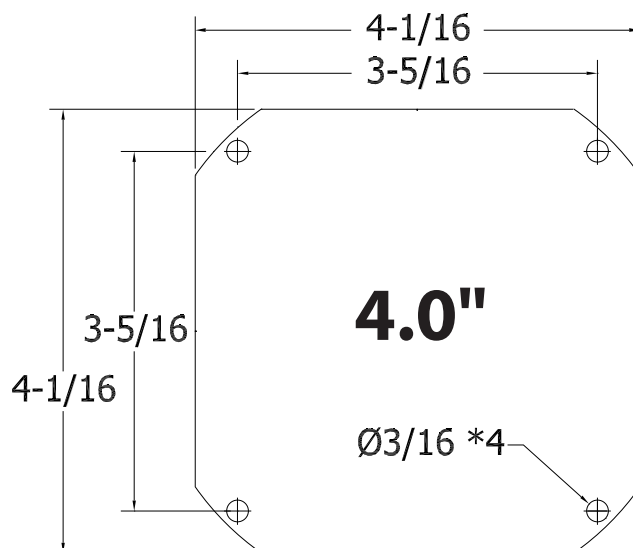

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the QUAM Architects' and Engineers' Resources section on the web at:
www.QuamSpeakers.com

© 2013 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.



QUAM-NICHOLS COMPANY, INC.
234 East Marquette Rd.
Chicago, IL. 60637
Tel: 1-800-NEED-NOW (800-633-3669)
Fax: 1-888-NEED-NOW (888-633-3669)
e-mail: NeedNow@QNC.com
www.QuamSpeakers.com