



Quam

TRANSFORMERS

TBL25

4W-25V

Five (5) Taps at -3dB Levels Each

GENERAL DESCRIPTION

The **TBL25** is a 4W-25V transformer with 5 taps at -3dB levels each, and 7" color-coded leads.

INTENDED USE - Indoor Environment

Primary Use	Signal tones, voice and music
Installation	Desired tap / common primary leads connected to the output of a constant voltage amplifier. Secondary / common attached to a nominal 8 Ohm loudspeaker.

AUDIO SPECIFICATIONS



Primary Volts	25V
Maximum Power Rating	4W
Primary Taps (-3 dB Steps)	4W, 2W, 1W, 0.50W, 0.25W
Secondary Load	8-Ohms, Nominal
Frequency Response	100 Hz- 15 kHz
Insertion Loss	1.0 dB

MECHANICAL SPECIFICATIONS

Primary Connection	7" Color-Coded Leads
Secondary Connection	6" Color-Coded Leads

RECOMMENDED QUAM COMPONENTS

Loudspeaker	Quam 8 Ohm Loudspeaker
--------------------	------------------------

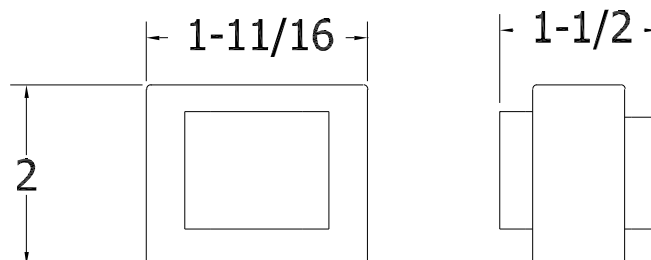

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the QUAM Architects' and Engineers' Resources section on the web at:
www.QuamSpeakers.com

© 2013 Quam-Nichols Company reserves the right to make changes and/or improvements to its products at any time and without notice.



QUAM-NICHOLS COMPANY, INC.
234 East Marquette Rd.
Chicago, IL. 60637
Tel: 1-800-NEED-NOW (800-633-3669)
Fax: 1-888-NEED-NOW (888-633-3669)
e-mail: NeedNow@QNC.com
www.QuamSpeakers.com