



760053926 | D-288-LN-8W-F12NS
Single Jacket All-Dielectric, Gel-Free, Outdoor Stranded Loose Tube Cable



Representative Image

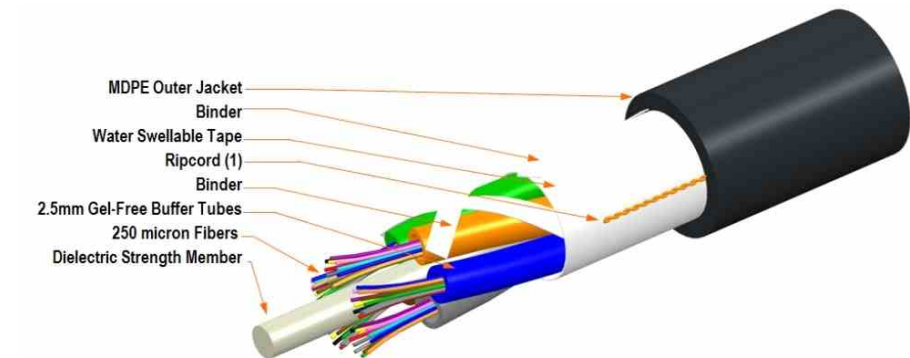

General Specifications

Cable Type	Stranded loose tube
Construction Type	Non-armored
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	TeraSPEED®, zero water peak singlemode fiber (G.652.D, G.657.A1 OS2)
Jacket Material	PE
Total Fiber Count	288
Fiber Type	TeraSPEED®, zero water peak singlemode fiber (G.652.D, G.657.A1 OS2)
Fiber Type, quantity	288
Fibers per Subunit, quantity	12
Jacket Color	Black
Jacket UV Resistance	UV stabilized

Dimensions

Buffer Tube/Subunit Diameter	2.50 mm 0.10 in
Cable Weight	179.0 kg/km 120.0 lb/kft
Diameter Over Jacket	18.20 mm 0.72 in
Subunit, quantity	24

Physical Specifications

Minimum Bend Radius, loaded	27.3 cm 10.7 in
Minimum Bend Radius, unloaded	18.2 cm 7.2 in

760053926 | D-288-IN-8WF12NS

Tensile Load, long term, maximum 180 lbf | 800 N
Tensile Load, short term, maximum 2700 N | 607 lbf
Vertical Rise, maximum 457.0 m | 1499.3 ft

Environmental Specifications

Environmental Space	Aerial, lashed Buried
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

Mechanical Test Specifications

Compression	125 lb/in 22 N/mm
Compression Test Method	FOTP-41 IEC 60794-1 E3
Flex	35 cycles
Flex Test Method	FOTP-104 IEC 60794-1 E6
Impact	5.88 N-m 4.34 ft lb
Impact Test Method	FOTP-25 IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1 E7
Water Penetration	24 h
Water Penetration Test Method	FOTP-82 IEC 60794-1 F5

Environmental Test Specifications

Cable Freeze	-2 °C 28 °F
Cable Freeze Test Method	FOTP-98 IEC 60794-1 F15
Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	IEC 60794-1 F9
Low High Bend	-30 °C to +60 °C (-22 °F to +140 °F)
Low High Bend Test Method	FOTP-37 IEC 60794-1 E11
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1 F1

Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-87-640 EN 187105 Telcordia GR-20
-------------------------------	--

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



760053926 | D-288LN-8WF12NS

Included Products

CS-8W-LT (Product Component—not orderable) — TeraSPEED® OS2 Singlemode Fiber

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable