




700210198 | 2071E SL 4/23 R1000
GigaSPEED XL® 2071E ETL Verified Category 6 U/UTP Cable, plenum, slate jacket, 4 pair count, 1000 ft (305 m) length, reel

Cross Section Drawing

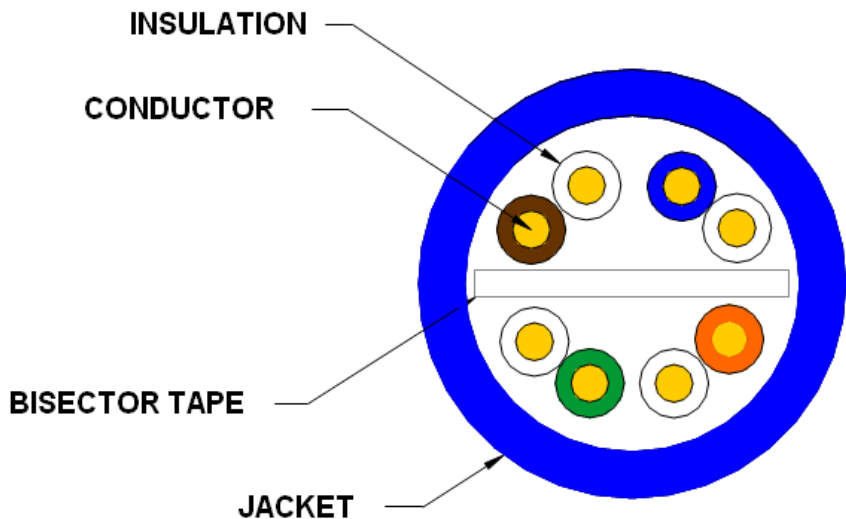

Construction Materials

Jacket Material	PVC
Conductor Material	Bare copper
Insulation Material	FEP Polyolefin
Separator Material	Flame retardant polyolefin

Dimensions

Cable Length	305 m 1000 ft
Cable Weight	29.00 lb/kft
Diameter Over Jacket	5.740 mm 0.226 in
Jacket Thickness	0.559 mm 0.022 in

Electrical Specifications

ANSI/TIA Category	6
dc Resistance Unbalance, maximum	5 %
dc Resistance, maximum	7.61 ohms/100 m
Mutual Capacitance	5.6 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	71 %
Operating Frequency, maximum	300 MHz
Operating Voltage, maximum	80 V

700210198 | 2071E SL 4/23 R1000

Transmission Standards	ANSI/TIA-568-C.2 CENELEC EN 50288-6-1 ISO/IEC 11801 Class E
Dielectric Strength, minimum	1500 Vac 2500 Vdc

Environmental Specifications

Environmental Space	Plenum
Flame Test Method	CMP
Installation Temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Smoke Test Method	CMP
UL Temperature Rating	75 °C 167 °F

General Specifications

Cable Type	U/UTP (unshielded)
Pairs, quantity	4
Cable Component Type	Horizontal
Packaging Type	Reel
Brand	GigaSPEED XL® SYSTIMAX®
Jacket Color	Slate
Product Number	2071E
Conductor Gauge, singles	23 AWG
Conductor Type, singles	Solid
Conductors, quantity	8
Separator Type	Bisector

Mechanical Specifications

Pulling Tension, maximum	11 kg 25 lb
--------------------------	---------------

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system

