



Select HDMI Cable

- CMG Jacket rated for in-wall applications
- Fully shielded to prevent EMI/RFI interference
- Supports high bandwidth features such as:
 - Ultra HD
 - 4K @50/60 (2160p)
 - 3D
 - Deep Color
 - x.v. Color™
 - Dolby® True HD
 - DTS-HD Master Audio
 - HDMI-CEC
- Gold plated connectors
- Lifetime warranty



Specifications: C2G Select HDMI Cable

Electrical Characteristics:

Signal Bandwidth:	10.2Gbps
Nominal Impedance with Tolerance:	100Ω
Nominal Capacitance:	95.2 pF/m
Dielectric Strength:	2.1
Insulation Resistance:	10MΩ
Nominal Attenuation:	300 KHz 825 MHz: < 8dB 825 MHz 2.475 GHz: < 21dB 2.457 GHz 4.125 GHz < 30 dB

Physical Characteristics:

Cable Bend Radius:	73mm
Approvals:	CMG, CE
Warranty:	Lifetime
Package Type:	Polybag

Conductor 1:

Conductor Type:	28AWG (7/0.127) Bare Copper
Insulation:	Foamed PE, ID: $\varnothing 1.05 \pm 0.05$ mm Red/White, 5 pairs
Drain Wire:	28AWG (7/0.127) Tinned Copper
Shield:	Aluminum Foil + Mylar 25% min overlapped

Conductor 2:

Conductor Type:	28AWG (7/0.127) Bare Copper
Insulation:	HDPE, ID: $\varnothing 0.7 \pm 0.05$ mm Red/Purple/Grey/Yellow

Connectors (2):


Connector Type:	19 pin HDMI
Plating:	Gold
Housing:	Grey & Black
Dimensions (HxWxL):	13 x 21 x 39mm

Overall Cable Construction:

Drain Wire:	28AWG (07/0.127) Bare Copper
Foil Shield:	Aluminum Foil + Mylar 25% min overlapped
Braided Shield:	16/10/0.12 CCAM 70% Coverage
Jacket	CMG (PVC, UL/CL2) Black O.D. - 7.3 ± 0.2 mm



Specifications: C2G Select HDMI Cable

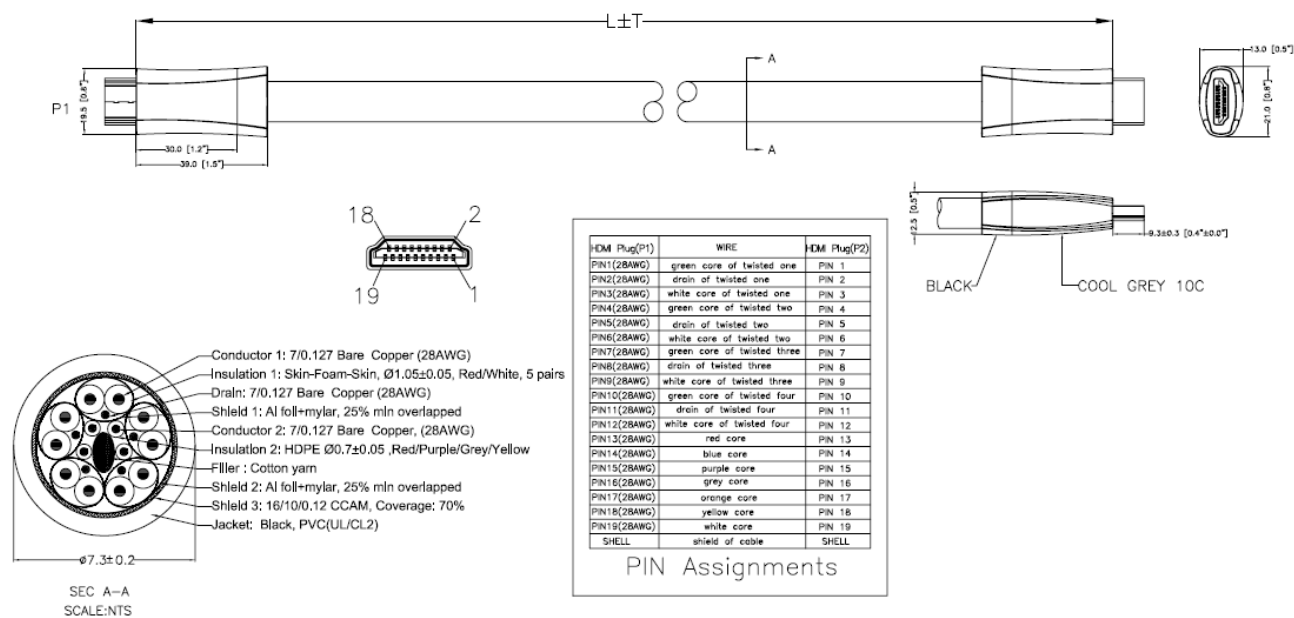

Part Number	Description	Weight (lbs)
42519	.5m Select HDMI Video Cable	
42520	1m Select HDMI Video Cable	
42521	1.5m Select HDMI Video Cable	
42522	2m Select HDMI Video Cable	
42523	3m Select HDMI Video Cable	

