

SPECIFICATION SHEET

D SERIES cUL US ELECTRONIC AUTO OFF IN-WALL TIMER

APPLICATIONS

- Whole house fans.
- Indoor/Outdoor lighting.
- Bathroom fans and lights.
- Self storage.

FEATURES

VARIABLE TIMING:

Button push changes time ON setting.

D1060M:

10, 20, 30, 60 minute.

D212H:

2, 4, 8, 12 hour.

LED DISPLAY:

Indicator moves to new range as timer counts down.

TAMPER RESISTANT:

Time ON interval preset.

EASY SET:

No adjustments, just wire and go!

WIRING:

Requires a neutral.

THREE COLORS:

Ivory, Light Almond, White.

SPECIFICATIONS

TIMING ACCURACY:

Line voltage.

INPUT VOLTAGE:

120VAC, 60Hz.

WIRE SIZE:


#14AWG.

OPERATING TEMPERATURE:

32 °F to 122 °F (0 °C to 50 °C).



WIRE DIAGRAM

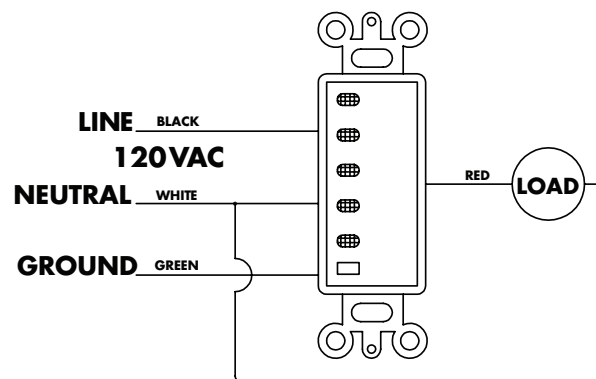

ORDERING INFO

CAT. NO.	UPC CODE	INPUT SUPPLY (VAC) 60Hz	TIME SETTINGS	OUTPUT CONTACTS
D212H	14021	120	Ivory	2, 4, 8, 12 HOURS
D212HA	14022	120	Light Almond	2, 4, 8, 12 HOURS
D212HW	14023	120	White	2, 4, 8, 12 HOURS
D1060M	14025	120	Ivory	10, 20, 30, 60 MINUTES
D1060LA	14024	120	Light Almond	10, 20, 30, 60 MINUTES
D1060MW	14025	120	White	10, 20, 30, 60 MINUTES

CONTACT RATINGS

TYPE	VOLTAGE (VAC)	RATING
General Purpose	120	15A
Resistive	120	1000W
Tungsten	120	1000W
Motor	120	1/4 HP
Ballast	120	1000VA