





## Connector Bloks™



Drawn - SD

Approved - KM

Title - Connector Bloks™

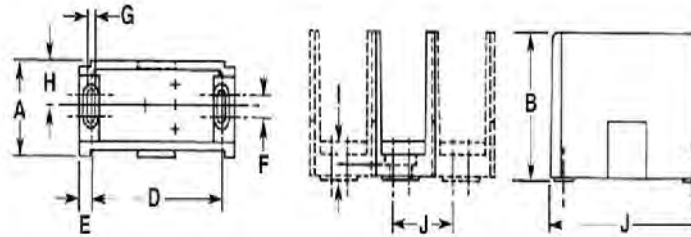

Dual Rated Connector Bloks

| Insulator<br>Cat. No | A    | B    | C    | D    | E    | F    | G    | H    | I    | J    |      |
|----------------------|------|------|------|------|------|------|------|------|------|------|------|
| S                    | 1.04 | 2.34 | 2.90 | 2.25 | 0.18 | 0.35 | 0.20 | 0.46 | 0.19 | 0.63 | 1.25 |
| M                    | 1.71 | 2.62 | 4.00 | 3.50 | 0.25 | 0.37 | 0.20 | 0.79 | 0.20 | 1.25 | 1.87 |
| L                    | 2.90 | 3.25 | 5.50 | 5.00 | 0.25 | 0.50 | 0.27 | 1.38 | 0.29 | 2.25 | 3.25 |

| Part<br>Number | Temp<br>Rating | Line Side                                                                                           | Load Side                                                                                         | Amps Per<br>Pole | Insulator Block |      |      | Insulator Block Size |
|----------------|----------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------|-----------------|------|------|----------------------|
|                |                |                                                                                                     |                                                                                                   |                  | L               | W    | H    |                      |
| AS-K2-H6       | 90 C           | <br>2/0-14 AWG     | <br>4-14 AWG     | 350              | 2.90            | 1.04 | 2.34 | S                    |
| AM-K2-H6       | 90 C           | <br>2/0-14 AWG     | <br>4-14 AWG     | 350              | 4.00            | 1.71 | 2.62 | M                    |
| AM-K2-H12      | 90 C           | <br>2/0-14 AWG     | <br>4-14 AWG     | 350              | 4.00            | 1.71 | 2.62 | M                    |
| AM-K2-I6       | 90 C           | <br>2/0-14 AWG   | <br>2-14 AWG   | 350              | 4.00            | 1.71 | 2.62 | M                    |
| AL-P2-H12      | 90 C           | <br>350MCM-6 AWG | <br>4-14 AWG   | 620              | 5.50            | 2.90 | 3.25 | L                    |
| AL-P2-K6       | 90 C           | <br>350MCM-6 AWG | <br>2/0-14 AWG | 620              | 5.50            | 2.90 | 3.25 | L                    |
| AL-R2-H12      | 90 C           | <br>500MCM-4 AWG | <br>4-14 AWG   | 760              | 5.50            | 2.90 | 3.25 | L                    |
| AL-R2-K6       | 90 C           | <br>500MCM-4 AWG | <br>2/0-14 AWG | 760              | 5.50            | 2.90 | 3.25 | L                    |
| AL-R2-M4       | 90 C           | <br>500MCM-4 AWG | <br>4/0-6 AWG  | 760              | 5.50            | 2.90 | 3.25 | L                    |