

## APPLICATIONS

- Emergency Exit

## SPECIFICATIONS

### Electrical

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90 minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### Housing

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out Chevron directional indicators.

### Illumination

- Ultra-bright, energy efficient, long-life Red LED


### Mounting

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount



## DIMENSIONS

H	W	D
7.13"	11.6"	1.6"

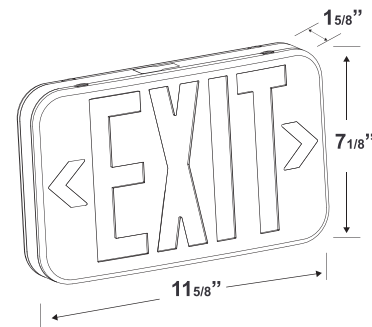

## Electrical Information

CATALOG NO.	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
EXLBURW-SL	0.8	0.8	0.09	0.09

CATALOG NO.	UPC CODE	VOLTAGE	FACE	TYPE	LETTERING	HOUSING	SHIPPING WEIGHT (LBS)
EXLBURW-SL	06392	120/277V	2	Battery Back-up	red	white	2