

SPECIFICATION SHEET

EPC SERIES LOW VOLTAGE PHOTOSENSORS

APPLICATIONS

- Parking lots.
- Walkways.
- Building exteriors.
- Floodlighting.

FEATURES

All Lexan® enclosure for impact and vandal resistant.
Mounting for 1/2" conduit with 180° swivel.
Dome and base ultrasonically welded for maximum strength.

SPECIFICATIONS

1-100fc light level adjustment available on time switch
(ELC series 1 – 250fc).
Maximum run length of twisted pair wire:
250 ft with 22AWG and 500 ft with 18AWG.

ORDERING INFO


CAT. NO.	UPC CODE	COLOR	TORK TIME SWITCH COMPATIBLE
EPC1	82115	Grey	DGU Series
			DGLC Series
			LC200 Series
EPC2	82120	Grey	DLC 400BP
EPC-A	82112	Grey	DGU-A Series DGLC-A Series
EPC-LC	82233	Grey	ELC Series




EPC1

EPC2
EPC-A
EPC-LC

WIRING DIAGRAMS

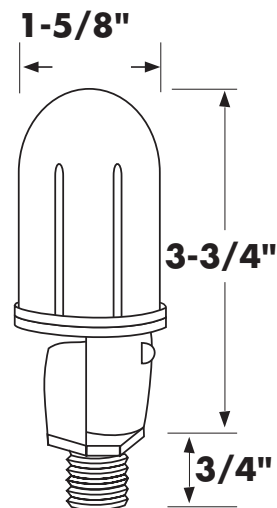

EPC1

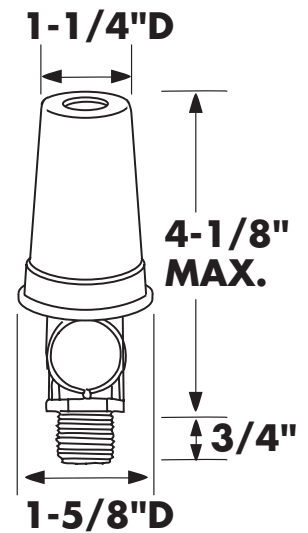

EPC2