


At the point of demarcation, Building Entrance Terminals, or BET's, safeguard communication equipment from damaging electrical surges that may get onto those incoming lines.

## FEATURES & BENEFITS

- UL 497 Listed for primary and secondary protection
- 110 input and output
- Available with a variety of termination choices, and in 25, 50 and 100-pair configurations
- Manufactured from 18 gauge, epoxy powder coated steel
- Splice chamber for input cable
- Uses industry standard 5-pin protector modules
- AQL Incoming Inspection Process
- ISO 9001:2000 registered facility
- Operating Temperature: -13°F to 149°F (-25°C to 65°C)

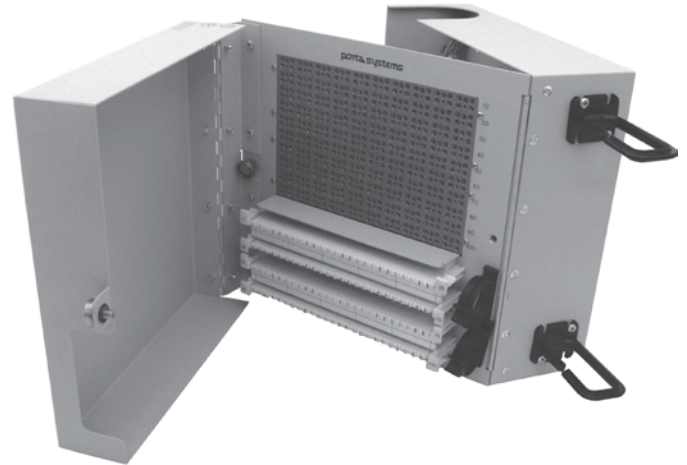

## ORDERING INFORMATION

| Model#          | Pair Count | Input | Output | Modules | Module Model# | Cover |
|-----------------|------------|-------|--------|---------|---------------|-------|
| 24100-110-M110C | 100        | 110   | 110    | None    | NA            | Yes   |

24100-110-M110C

5-PIN PRODUCTS


## BUILDING ENTRANCE TERMINALS



110 Termination

**porta systems**  
Products

### MECHANICAL SPECIFICATIONS FOR 24100-110-M110 BUILDING ENTRANCE TERMINAL:

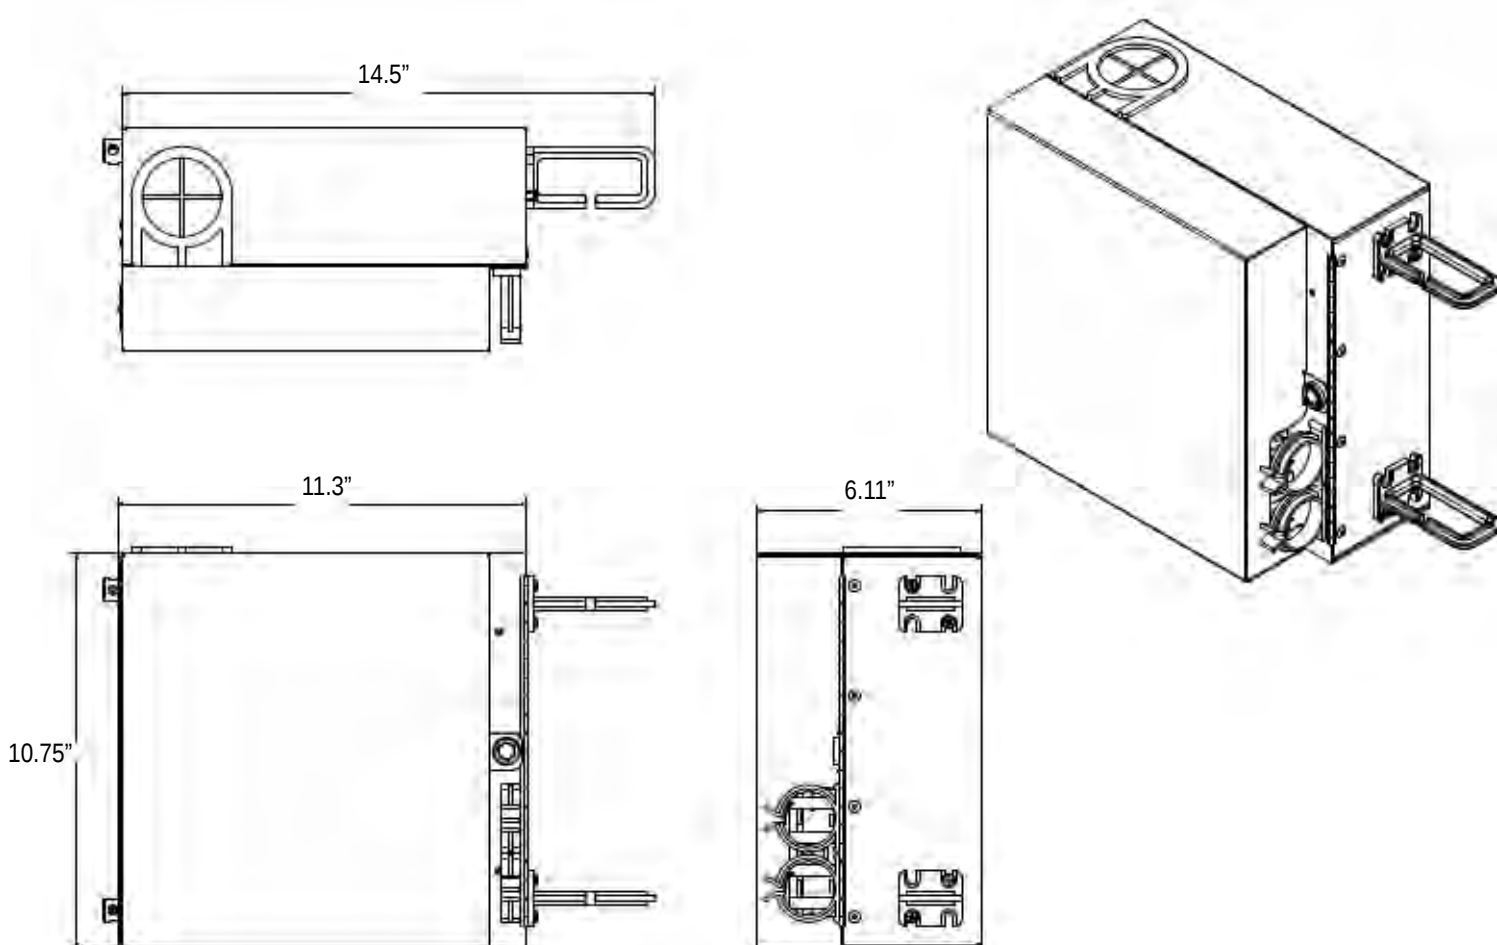

| Pair Count | Dimensions (height x width x depth)                  | Weight (approx.)* |
|------------|------------------------------------------------------|-------------------|
| 100 PAIR   | 10.75" x 14.5" x 6.11" (27.3 cm x 36.8 cm x 15.5 cm) | 16 lbs.           |

\* Weight - Add approx 0.5 oz per installed module.