





16-Port Gigabit GREENnet Switch TEG-S16g(V1.OR)

The 16-Port Gigabit GREENnet Switch, model TEG-S16g, provides high bandwidth performance, ease of use, and reliability, all while reducing power consumption by up to 70%*.

GREENnet technology automatically adjusts power voltage as needed, resulting in substantial energy savings. Embedded GREENnet technology works right out of the box with no management requirement.

Boost office network efficiency and eliminate network congestion with Gigabit speeds and a total switching capacity of 32Gbps with Full-Duplex mode. A built in universal power supply reduces cable clutter and diagnostic LEDs help with network troubleshooting. Plug and Play this sturdy metal switch for reliable high-speed network connectivity.

FEATURES

- 16 x 10/100/1000Mbps Auto-MDIX Gigabit Ethernet ports
- On / off power switch
- Features a 32Gbps forwarding capacity
- Internal power supply reduces clutter
- GREENnet technology reduces power consumption when:
 - a. Ethernet port is not in use
 - b. Connected device is turned off
 - c. Connected device is in power-saving mode
 - d. Based on Ethernet cable length
- IEEE 802.3x Flow Control for full-duplex mode
- · Back pressure Flow Control for half-duplex mode
- · Store-and-Forward switching architecture with non-blocking wire-speed performance
- · Integrated address look-up engine with an 8K MAC address table
- · 2MBits RAM data buffer
- · Operates and maximizes packet filtering and forwarding rate
- Jumbo Frame support up to 9216Bytes
- · Rackmount hardware included
- Sturdy metal housing
- Diagnostic LEDs and Plug & Play support
- Limited lifetime warranty

16-Port Gigabit GREENnet Switch

TEG-S16g(V1.0R)


SPECIFICATIONS

| Standards !EEE 802.3 1088se-T, IEEE 802.3x 1008se-TX . IEEE 802.3x 1000Base-T, IEEE 802.3x 1000Base-T, IEEE 802.3x Flow Control; Network Media :Elthernet: Cat. 5 and 5 eu p to 100 m . Fast Ethernet: Cat. 5 and 6 eu p to 100 m . Gigabit Ethernet: Cat. 5 and 6 eu p to 100 m . Fast Ethernet: Cat. 5 and 6 eu p to 100 m . Gigabit Ethernet: Cat. 5 and 6 eu p to 100 m . Fas | HARDWARE | |
|--|---------------------|---|
| Fast Ethernet: Cat. 5 and 5 up to 100 m Gigabit Ethernet: Cat. 5 and 6 up to 100 m Ethernet: 10Mbps/20Mbps (half/full-duplex) Fast Ethernet: 100Mbps/200Mbps (half/full-duplex) Gigabit Ethernet: 200Mbps/200Mbps (half/full-duplex) Gigabit Ethernet: 200Mbps (full-duplex) Gigabit Fabric Gigabit Ethernet: 200Mbps (full-duplex) Gigabit Ethernet: 200Mbps (full-duplex) Gigabit Fabric Gigabit Ethernet: 200Mbps Auto-MDIX RJ-45 ports Gigabit Fabric Gigabit Fabric Gigabit Fabric Gigabit Fabric Gigabit Fabric Gigabit Fabric Gigabit Ethernet: 200Mbps Auto-MDIX RJ-45 ports Gigabit Fabric Gigabit Fabric Gigabit Fabric Gigabit Fabric Gigabit Ethernet: 200Mbps Auto-MDIX RJ-45 ports Gigabit Fabric Gigabit Fabric Gigabit Ethernet: 200Mbps Auto-MDIX RJ-45 ports Gigabit Fabric Gigabit Fabric Gigabit Fabric Gigabit Ethernet: 200Mbps Auto-MDIX RJ-45 ports Gigabit Fabric Gigabit Fabric Gigabit Ethernet: 200Mbps Auto-MDIX RJ-45 ports Gigabit Fabric Gigabit Fabric Gigabit Ethernet: 200Mbps Auto-MDIX RJ-45 ports Gigabit Fabric Gigabit Ghernet Gigabit Fabric Gigabit Fabric Gigabit Ghernet Gigabit Gh | Standards | |
| Fast Ethernet: 100Mbps/200Mbps (half/full-duplex) Protocol / Topology CSMA /CD, Star Power Consumption 7.2 Watts (max.) Switch Fabric 32Gbps Interface 16 x 10/100/1000Mbps Auto-MDIX RJ-45 ports Power Button On / off power button Data RAM Buffer 2MBits Filtering Table 8K entries Jumbo Frame Support Up to 9216Bytes Diagnostic LED Power, Link/ACT, 100Mbps, 100Mbps Power 110~240VAC, 50/60Hz Internal universal switching power Dimension 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.) Weight 1.6 kg (3.5 lbs.) Humidity Max. 90% (non-condensing) | Network Media | Fast Ethernet: Cat. 5 and 5e up to 100 m |
| Power Consumption• 7.2 Watts (max.)Switch Fabric• 32GbpsInterface• 16 x 10/100/1000Mbps Auto-MDIX RJ-45 portsPower Button• On / off power buttonData RAM Buffer• 2MBitsFiltering Table• 8K entriesJumbo Frame Support• Up to 9216BytesDiagnostic LED• Power, Link/ACT, 100Mbps, 1000MbpsPower• 100~240VAC, 50/60Hz Internal universal switching powerDimension• 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.)Weight• 1.6 kg (3.5 lbs.)Temperature• Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F)Humidity• Max. 90% (non-condensing) | Data Rate | Fast Ethernet: 100Mbps/200Mbps (half/full-duplex) |
| Switch Fabric • 32Gbps Interface • 16 x 10/100/1000Mbps Auto-MDIX RJ-45 ports Power Button • On / off power button Data RAM Buffer • 2MBits Filtering Table • 8K entries Jumbo Frame Support • Up to 9216Bytes Diagnostic LED • Power, Link/ACT, 100Mbps, 1000Mbps Power • 100~240VAC, 50/60Hz Internal universal switching power Dimension • 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.) Weight • 1.6 kg (3.5 lbs.) Temperature • Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F) Humidity • Max. 90% (non-condensing) | Protocol / Topology | CSMA /CD, Star |
| Interface | Power Consumption | • 7.2 Watts (max.) |
| Power Button Oata RAM Buffer • 2MBits Filtering Table • 8K entries Jumbo Frame Support • Up to 9216Bytes Diagnostic LED • Power, Link/ACT, 100Mbps, 1000Mbps Power • 100~240VAC, 50/60Hz Internal universal switching power Dimension • 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.) Weight • 1.6 kg (3.5 lbs.) Temperature • Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F) Humidity • Max. 90% (non-condensing) | Switch Fabric | • 32Gbps |
| Data RAM Buffer• 2MBitsFiltering Table• 8K entriesJumbo Frame Support• Up to 9216BytesDiagnostic LED• Power, Link/ACT, 100Mbps, 1000MbpsPower• 100~240VAC, 50/60Hz Internal universal switching powerDimension• 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.)Weight• 1.6 kg (3.5 lbs.)Temperature• Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F)Humidity• Max. 90% (non-condensing) | Interface | • 16 x 10/100/1000Mbps Auto-MDIX RJ-45 ports |
| Filtering Table • 8K entries Jumbo Frame Support • Up to 9216Bytes Diagnostic LED • Power, Link/ACT, 100Mbps, 1000Mbps Power • 100~240VAC, 50/60Hz Internal universal switching power Dimension • 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.) Weight • 1.6 kg (3.5 lbs.) Temperature • Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F) Humidity • Max. 90% (non-condensing) | Power Button | On / off power button |
| Jumbo Frame Support • Up to 9216Bytes • Power, Link/ACT, 100Mbps, 1000Mbps Power • 100~240VAC, 50/60Hz Internal universal switching power Dimension • 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.) Weight • 1.6 kg (3.5 lbs.) Temperature • Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F) Humidity • Max. 90% (non-condensing) | Data RAM Buffer | • 2MBits |
| Diagnostic LED• Power, Link/ACT, 100Mbps, 1000MbpsPower• 100~240VAC, 50/60Hz Internal universal switching powerDimension• 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.)Weight• 1.6 kg (3.5 lbs.)Temperature• Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F)Humidity• Max. 90% (non-condensing) | Filtering Table | 8K entries |
| Power • 100~240VAC, 50/60Hz Internal universal switching power Dimension • 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.) Weight • 1.6 kg (3.5 lbs.) Temperature • Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F) Humidity • Max. 90% (non-condensing) | Jumbo Frame Support | • Up to 9216Bytes |
| Dimension • 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.) Weight • 1.6 kg (3.5 lbs.) Temperature • Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F) Humidity • Max. 90% (non-condensing) | Diagnostic LED | Power, Link/ACT, 100Mbps, 1000Mbps |
| Weight • 1.6 kg (3.5 lbs.) Temperature • Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F) Humidity • Max. 90% (non-condensing) | Power | 100~240VAC, 50/60Hz Internal universal switching power |
| Temperature • Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F) Humidity • Max. 90% (non-condensing) | Dimension | • 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.) |
| Humidity • Max. 90% (non-condensing) | Weight | • 1.6 kg (3.5 lbs.) |
| | Temperature | • Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F) |
| Certifications • CE, FCC | Humidity | Max. 90% (non-condensing) |
| | Certifications | • CE, FCC |

^{*} Max power savings compared with standard TRENDnet switches.

TRENDnet offers a limited lifetime warranty for all of its metal-enclosed network switches that have been purchased in the United States/Canada on or after 1/1/2015. Cooling fan and internal power supply carry a one-year warranty

NETWORKING SOLUTIONS

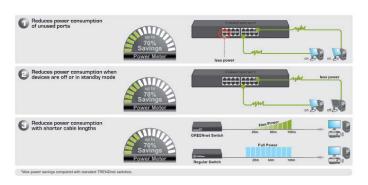

PACKAGE CONTENTS

TEG-S16G

Multi-Language Quick Installation Guide

Power cord (1.8m / 6ft.)

Rackmount hardware

RELATED PRODUCTS

| TEW-639GR | 300Mbps Wireless N Gigabit Router |
|------------|-----------------------------------|
| TEW-S24g | 24-Port Gigabit GREENnet Switch |
| TEG-PCITXR | Gigabit PCI Adapter |

CONTACT INFORMATION

TRENDIET

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500 Fax: 1-310-961-5511 Web: www.trendnet.com Email: sales@trendnet.com 1-888-326-6061

