

MODEL TS-2-2T



SPECIFICATIONS

- GREEN 2 INCH SQUARE PUSHBUTTON
- MOMENTARY ACTION SWITCH
- TWO S.P.D.T. CONTACTS RATED 10A.@ 35 VDC
- S.P.D.T. TIMED CONTACTS RATED 2A.@35 VDC
- TIME DELAY ADJUSTABLE FROM 2 TO 45 SECONDS
- TIMER INPUT VOLTAGE 12 TO 24 VDC OR VAC
- SWITCH ILLUMINATED WITH HI-BRIGHTNESS LED, OPERATES ON 12 OR 24 VOLTS AC OR DC
- SWITCH MOUNTED ON SINGLE GANG S.S. PLATE
- CONFORMS TO U.L. STANDARD 294 FOR ACCESS CONTROL, U.L. FILE SA32686




ALARM CONTROLS CORPORATION

19 BRANDYWINE DRIVE DEER PARK, NY 11729


1 631 586-4220 1 800 645-5538

WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

TYPICAL WIRING DIAGRAMS FOR MODEL TS-2-2T

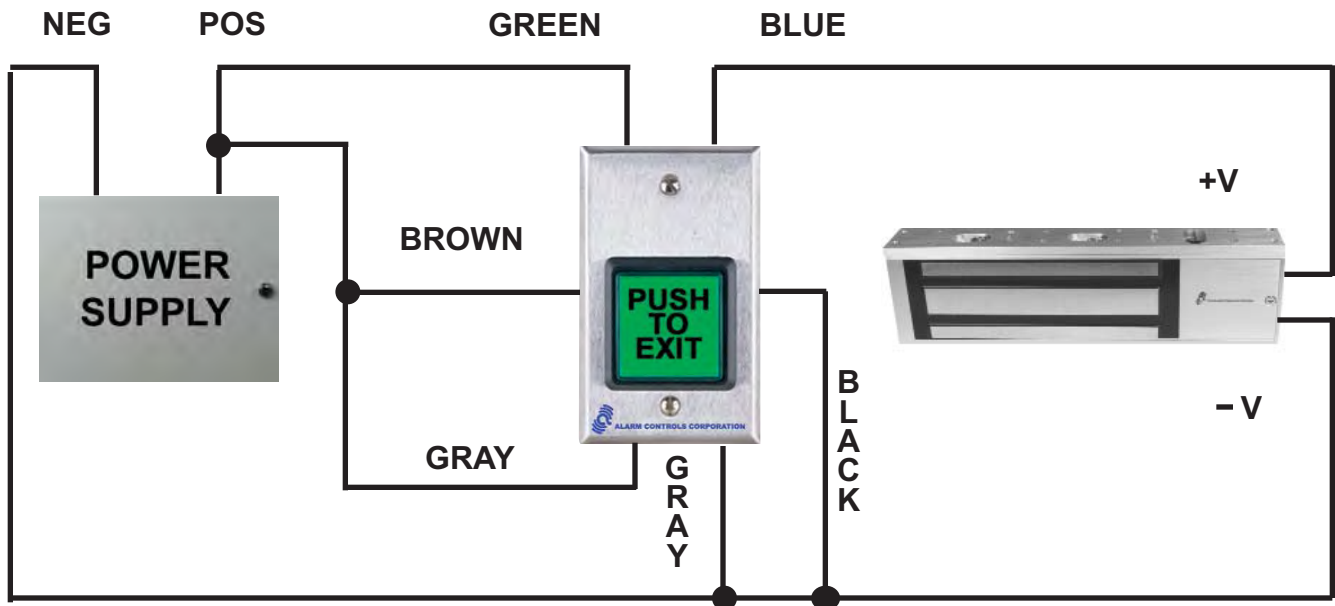

ELECTRIC DOOR STRIKE FAIL SECURE MODE

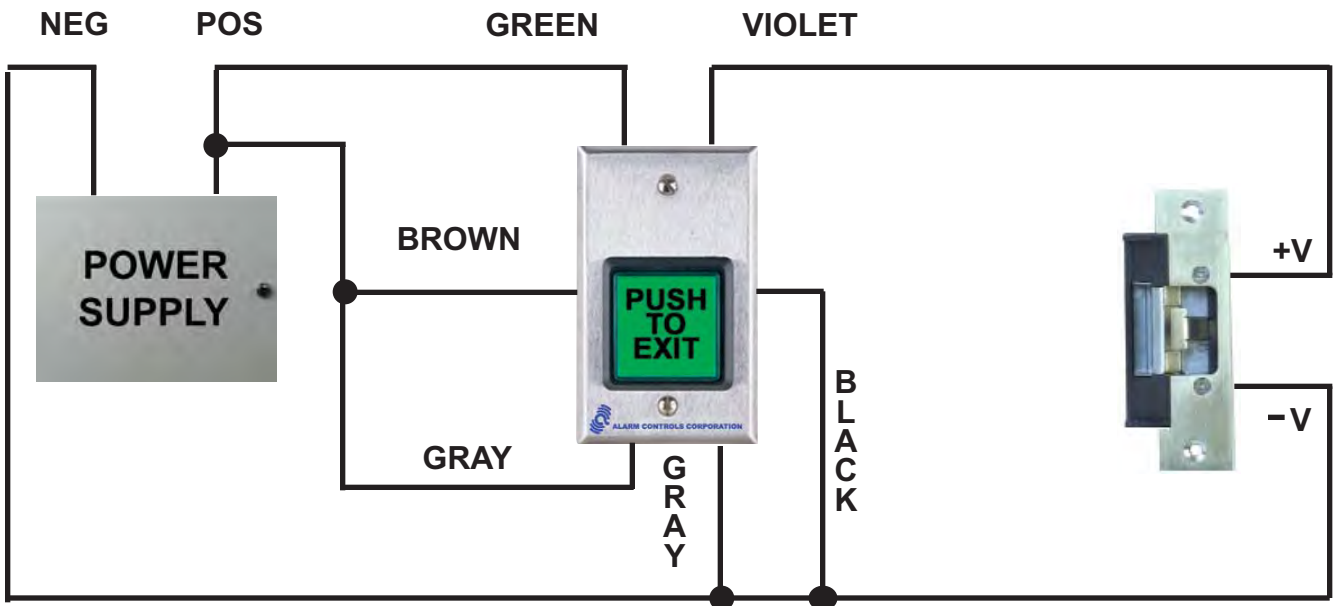


INSTALLATION INSTRUCTIONS

MODELS TS-2-2T, TS-3-2T, TS-4-2T, TS-5-2T



U.L. FILE SA32686

REAR VIEW OF PLATE

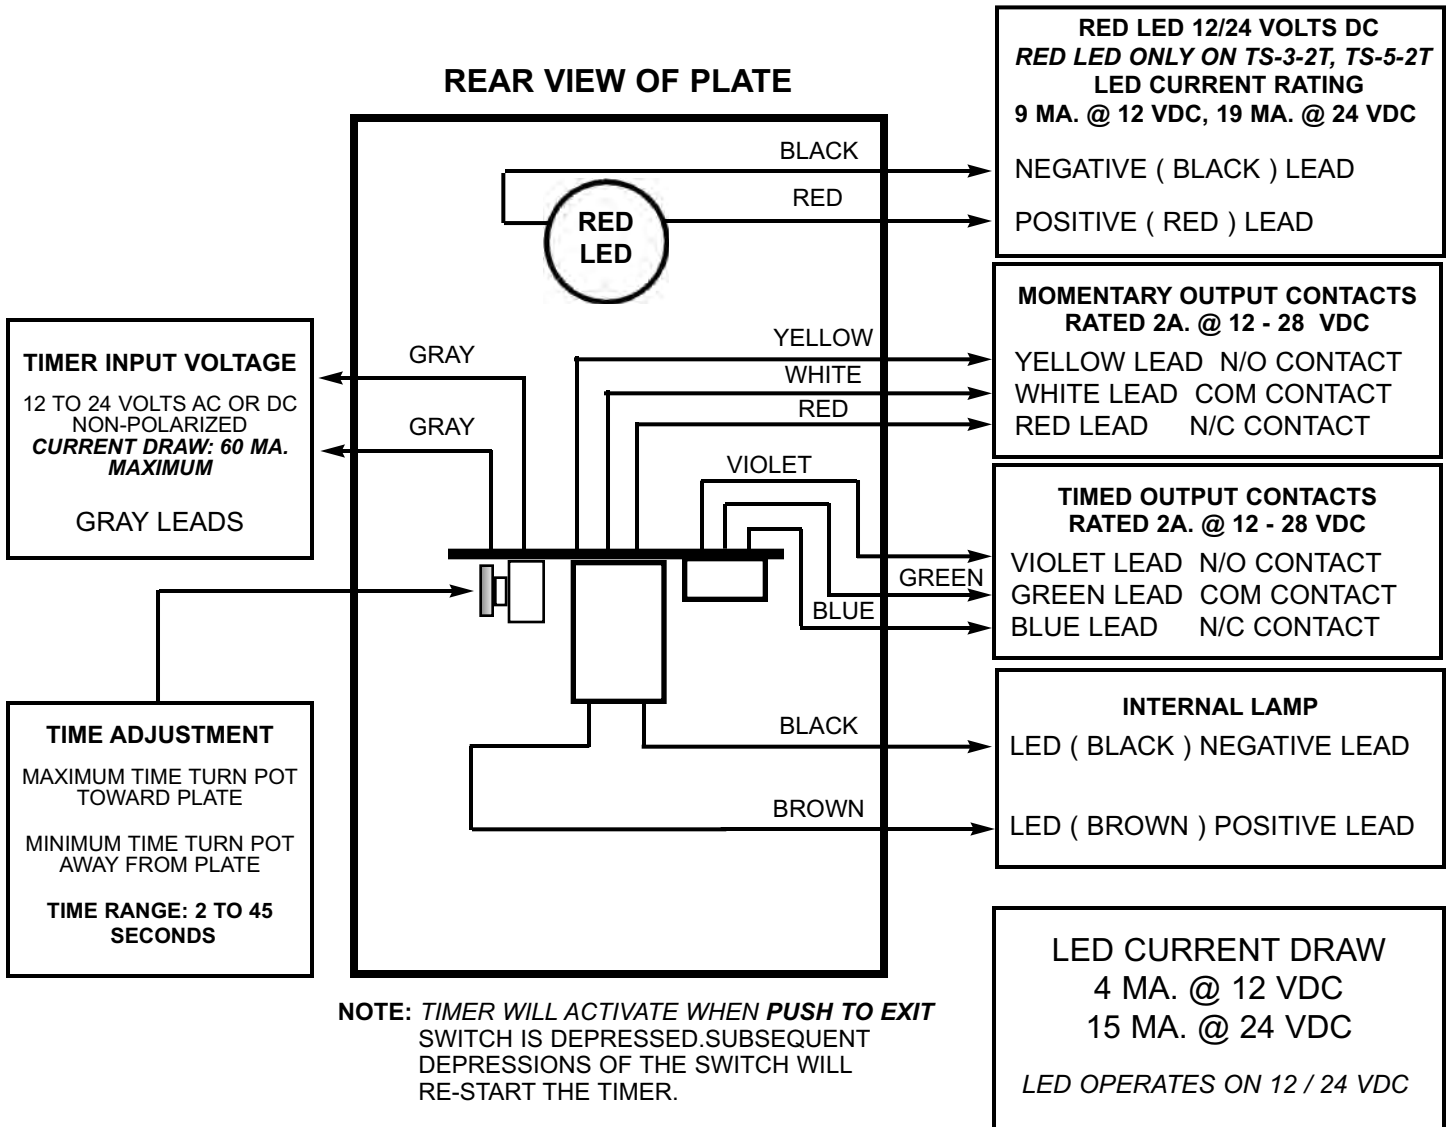

MOUNT WALLPLATE IN A VERTICAL POSITION

MODELS TS-2-2T, TS-3-2T, TS-4-2T & TS5-2T
SHOULD BE MOUNTED IN A
2.5 INCH ELECTRICAL BOX



ALARM CONTROLS CORPORATION
19 BRANDYWINE DRIVE P.O. BOX 280
DEER PARK, NY 11729

PH: 1 800 645-5538 1 631 586-4220 FAX ; 1 631 586-6500
WWW.ALARMCONTROLS.COM EMAIL: INFO@ALARMCONTROLS.COM