

## EN1210 Single Input Universal Transmitter



The Inovonics single input universal transmitter is designed for use with any standard normally open or normally closed contact. It is fully supervised and includes case tamper and battery.

### Product Features

Mounting bracket included for quick and easy installation

Can be used with almost any standard NO/NC contact

Fully supervised

Includes case tamper protection

### Product Specifications


Weight:	1.9 oz
Typical battery life:	3 – 5 years
Internal battery type:	Panasonic CR123A
Accessories:	ACC1210-10, EN1210/EN1212 white housing 10 pack, ACC1210B-10 EN1210/EN1212 brown housing 10 pack
External contacts:	Normally open or normally closed
External contact cabling requirements:	14 - 22 gauge wire, unshielded, 10 foot maximum length
Distance, external contact to transmitter:	10 feet maximum
Operating environment:	
Temperature:	-4 to 140°F
Humidity:	Up to 90% (non-condensing)
Market:	North America, Australia, New Zealand
EchoStream® frequency:	902-928 MHz, frequency hopping spread spectrum
Check-in time frequency:	3 minutes
Regulatory compliance:	FCC, RoHS, Industry Canada

### Mounting plate




The transmitter mounting plate hinges to the transmitter. Just mount the plate and snap the transmitter in place.

## Inputs

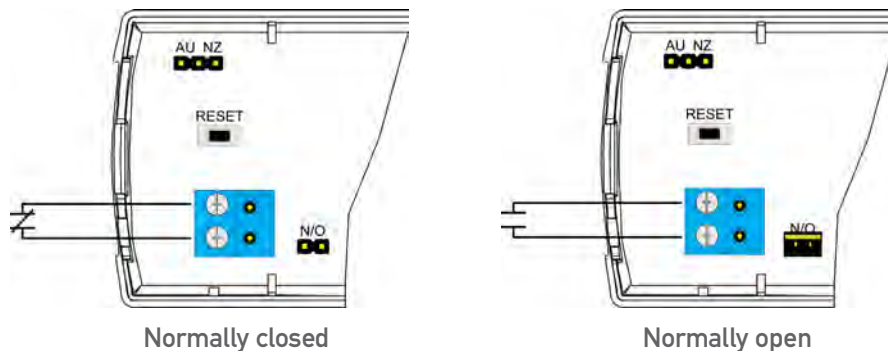

## Dimensions

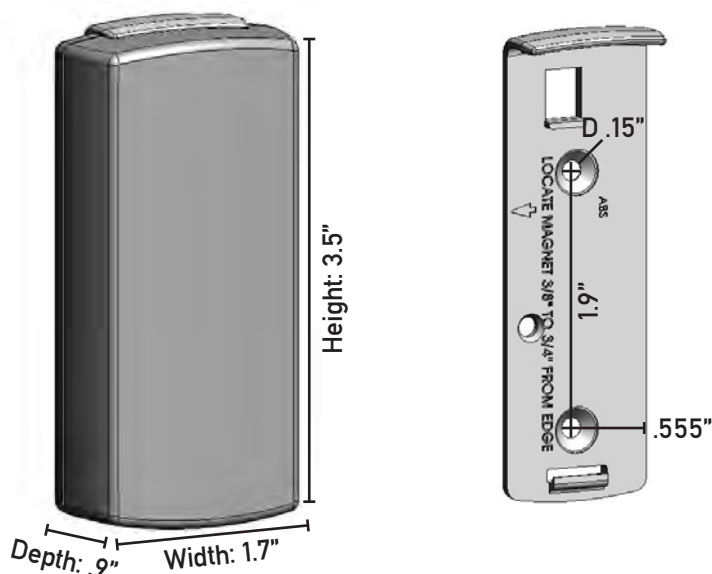

## Reference Materials (available at [www.inovonics.com](http://www.inovonics.com))

EN1210 EchoStream Single Input Universal Transmitter Installation Instructions

EchoStream Developer Guide

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.

## Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

