



The Alliance-mx encodes video using Main Profile H.264, the most efficient video compression available, resulting in a smooth, high-quality image, low network bandwidth utilization, and reduced storage costs. Requiring less than 4.0 W PoE, the Alliance-mx is highly energy-efficient and economical. A movable day/night IR filter and choice of lens enables field-of-view adaptability for a wide range of settings and applications. ONVIF and PSIA compliant APIs provide the necessary flexibility to ensure compatibility with many of the most popular VMS platforms.


IQM-WM3

Wall Mount



Allows indoor or outdoor installation on a wall surface with the dome oriented toward the ground.

Height	5.8 in. (146.4mm)
Width	6.4 in. (161.9 mm)
Depth	10.75 in. (273.0 mm)
Weight	3.96 lb (1.796 kg)
Construction	Die-cast aluminum

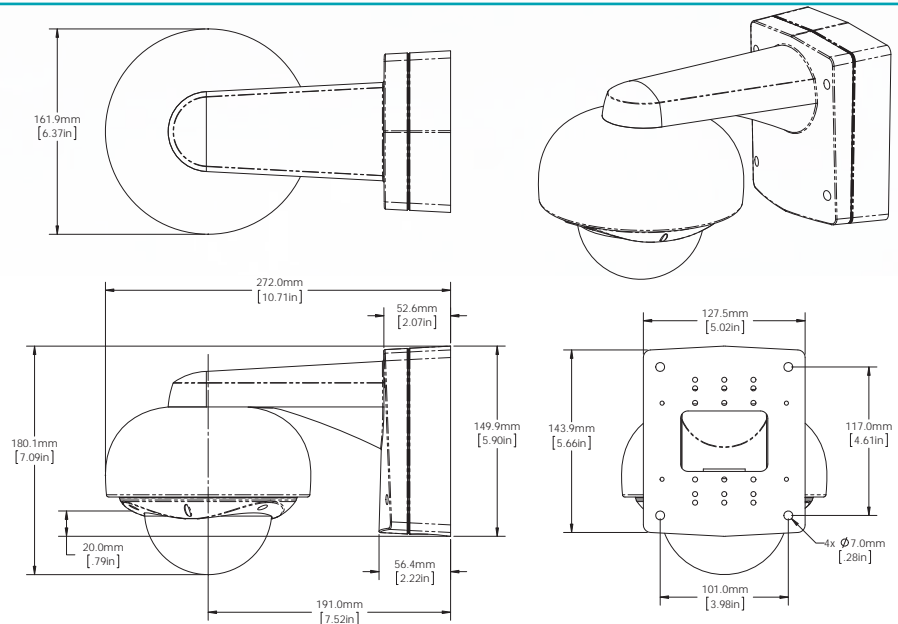

IQM-PND

Ceiling Mount



Allows indoor or outdoor installation on a ceiling surface with the dome oriented toward the ground.

Height	4.7 in. (119.0 mm)
Width	6.4 in. (161.9 mm)
Depth	6.4 in. (161.9 mm)
Weight	1.4 lb (0.683 kg)
Construction	Die-cast aluminum

