

SPECIFICATION SHEET

**USB-C To VGA Video Adapter**

- No driver is required which allows for quick setup and no down time.
- Compact light weight design makes it easy to carry for presentations.
- Supports resolutions up to 1920x1200
- 3 Year Warranty

Specifications: USB-C To VGA Video Adapter

Electrical Specifications:

Voltage Rating	30V
Insulation Resistance	10M Ω /km
Conductor Resistance	@ 20°C Max

Physical Specifications:

Operating Temperature	0°C to 50°C
Storage Temperature	-25°C to 70°C
Jacket	PVC
Shield	AL-Mylar 100% Coverage
	Braid 16/5/0.08
Drain	32AWG (7/0.12BC)
OD	4.5mm \pm 0.15mm

Conductor 1: (2 Conductors, 2 Pair)

Conductor	32AWG (7/0.08TC)
Insulation	FM-PE, ID:0.62 \pm 0.02mm
Color	White/Brown, White/Red
Drain	32AWG (7/0.08TC)
Shield	AL-Mylar 100% Coverage

Conductor 2: (2 Conductors, 1 Pair)

Conductor	32AWG (7/0.08TC)
Insulation	FM-PE, ID:0.62 \pm 0.02mm
Color	White/Green
Shield	AL-Mylar 100% Coverage


Conductor 3: (4 Conductors)

Conductor	32AWG (7/0.08TC)
Insulation	HD-PE, ID:0.5 \pm 0.03mm
Color	Orange/Yellow/Green/White

Conductor 4: (2 Conductors)

Conductor	28AWG (7/0.12TC)
-----------	------------------

Specifications: USB-C To VGA Video Adapter

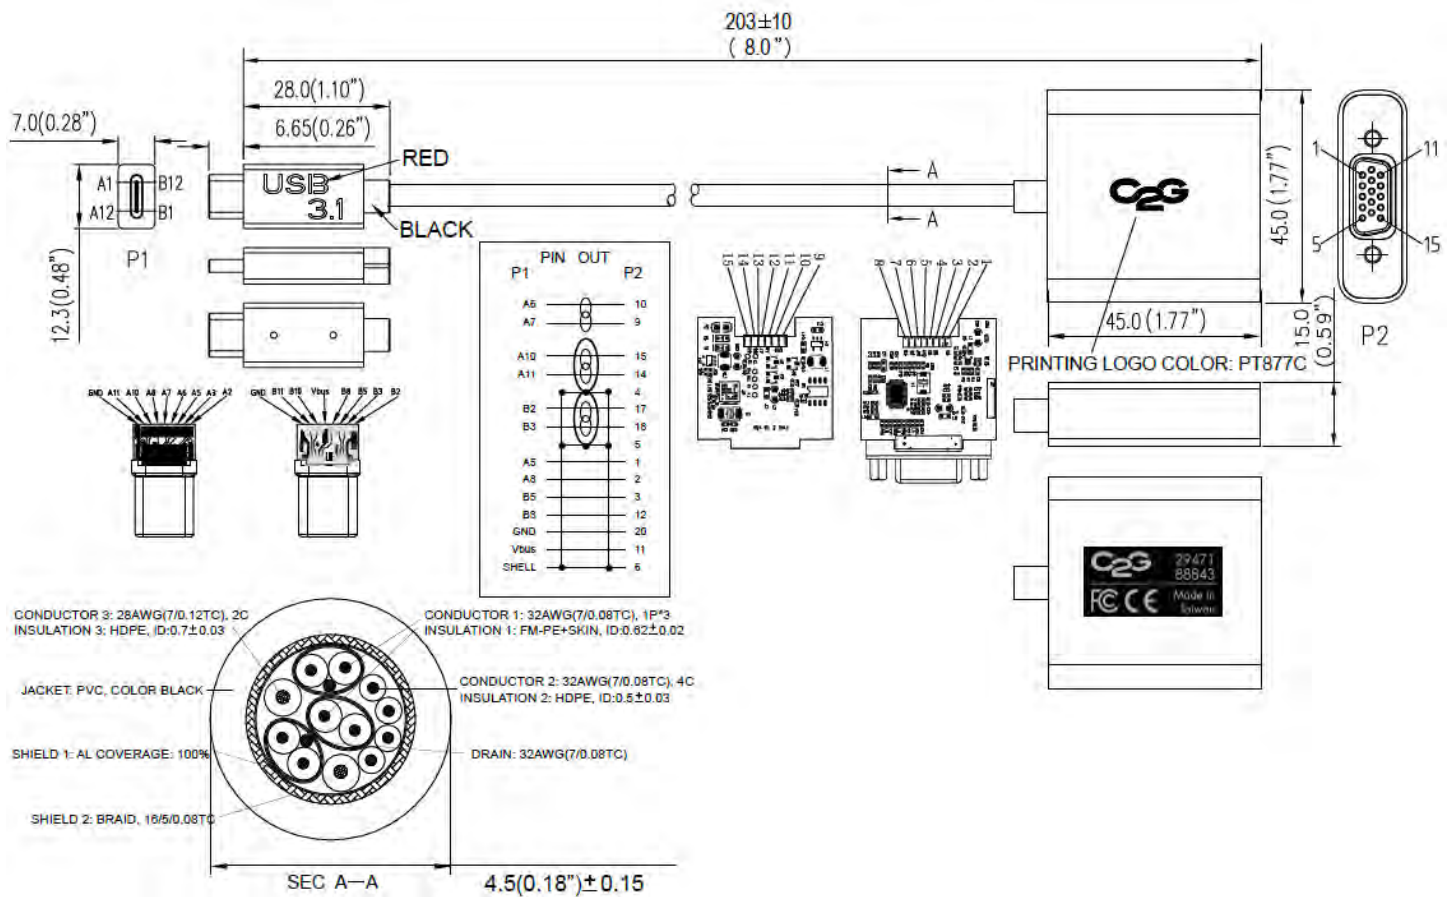

Part Number	Description	Weight (lbs)
29471	USB-C To VGA Video Adapter-Black	.07
29472	USB-C To VGA Video Adapter-White	.07



CABLES TO GO

Cables To Go
3555 Kettering Blvd.
Moraine, OH 45439
Phone: 800.287.2843
www.c2g.com

Follow Us

