

SPECIFICATION SHEET



USB-C To HDMI Audio/Video Adapter

- No driver is required which allows for quick setup and no down time.
- Compact light weight design makes it easy to carry for presentations.
- Supports high bandwidth features such as:
 - 4k
 - 3D
- Supports HDCP 2.0
- Reversible, symmetrical USB-C connector.
- 3 Year Warranty.

Specifications: USB-C To HDMI Audio/Video Adapter

Electrical Specifications:

Voltage Rating	30V
Insulation Resistance	10M Ω /km
Conductor Resistance	@ 20°C Max

Physical Specifications:

Operating Temperature	0°C to 50°C
Storage Temperature	-25°C to 70°C
Jacket	PVC
Shield	AL-Mylar 100% Coverage
Drain	Braid 16/7/0.12
OD	32AWG (7/0.08BC)
	5.2mm \pm 0.2mm

Conductor 1: (2 Conductors, 5 Pair)

Conductor	32AWG (7/0.08TC)
Insulation	FM-PE, ID:0.62 \pm 0.02mm
Color	White/Brown, White/Red, White/Black, White/Green
Drain	32AWG (7/0.08TC)
Shield	AL-Mylar 100% Coverage


Conductor 2: (4 Conductors)

Conductor	32AWG (7/0.08TC)
Insulation	HD-PE, ID:0.5 \pm 0.03mm
Color	Purple/Yellow/White/Green

Conductor 3: (1 Conductors)

Conductor	28AWG (7/0.12TC)
Insulation	HD-PE, ID:0.7 \pm 0.03mm
Color	Red

Specifications: USB-C To HDMI Audio/Video Adapter

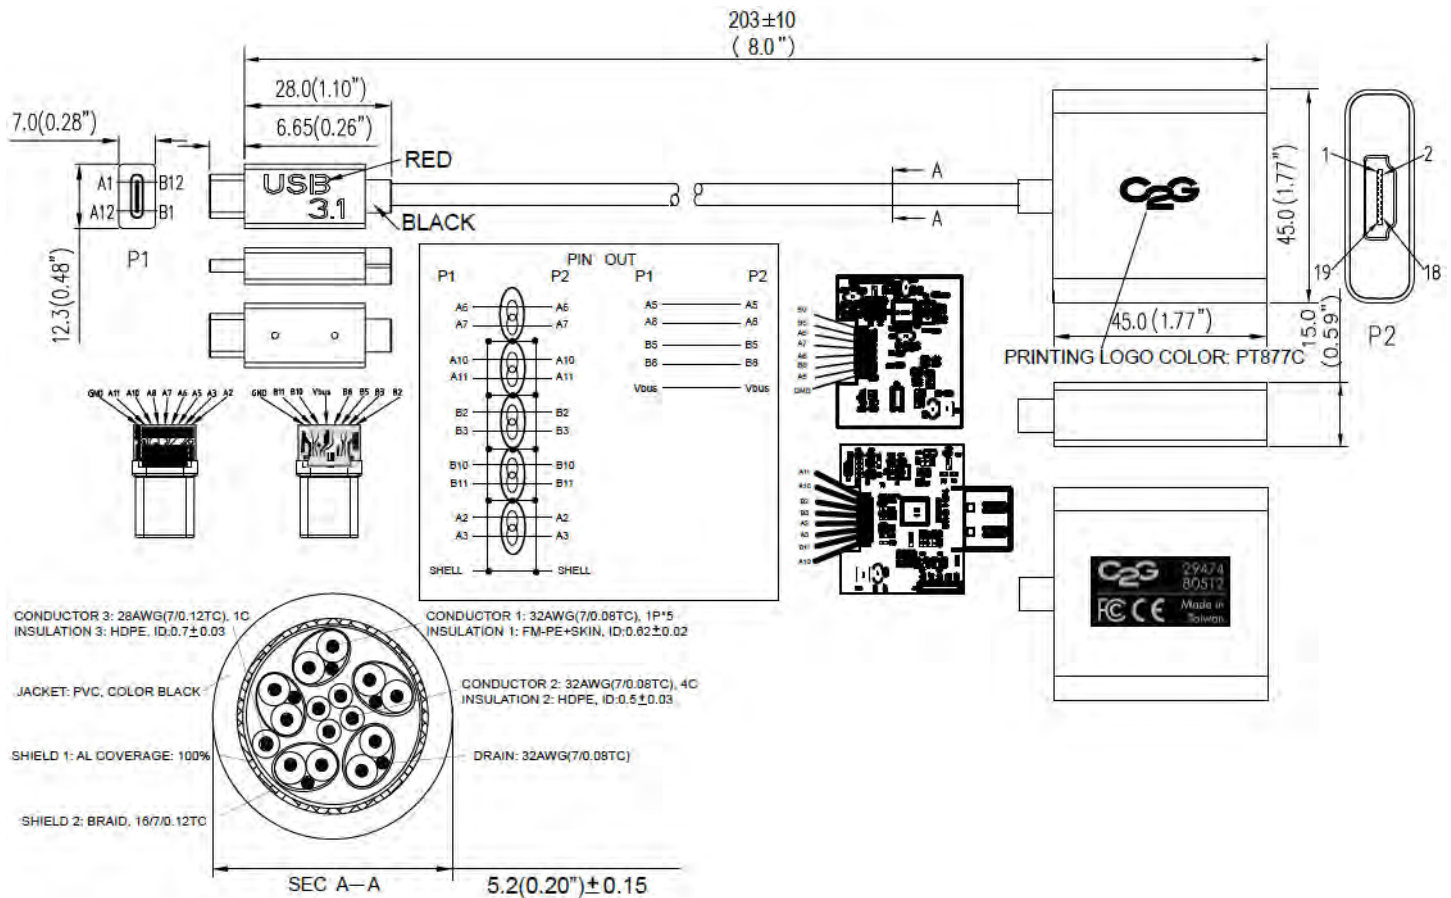

Part Number	Description	Weight (lbs)
29474	USB-C To HDMI Audio/Video Adapter-Black	.06
29475	USB-C To HDMI Audio/Video Adapter-White	.06



CABLES TO GO

Cables To Go
3555 Kettering Blvd.
Moraine, OH 45439
Phone: 800.287.2843
www.c2g.com

Follow Us

