




UN874035114/10 | CS44P BLU C6A 4/23 U/UTP CPK 1KFT
CS44P ETL Verified Category 6A U/UTP Cable, plenum, blue jacket, 4 pair count, 1000 ft (305 m) length CommPak

Product Classification

Portfolio	Uniprise®
Product Type	Twisted pair cable
Regional Availability	North America

Cross Section Drawing

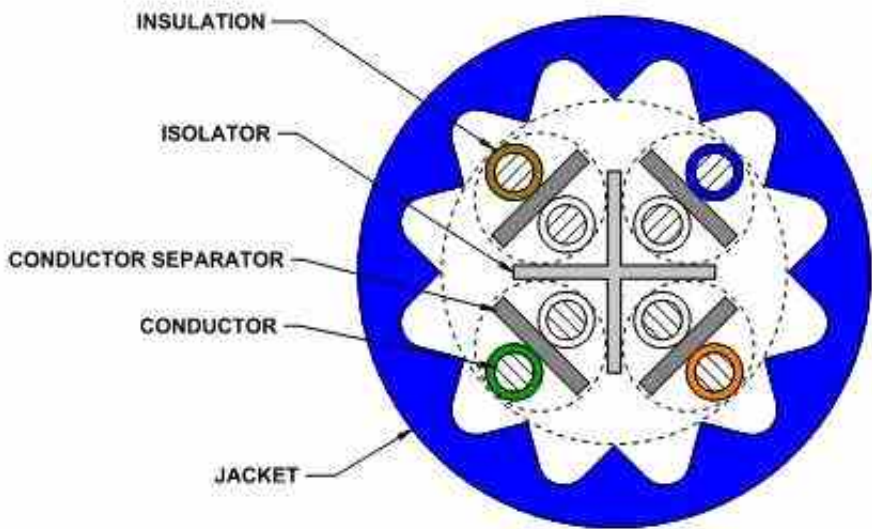

Construction Materials

Jacket Material	PVC
Conductor Material	Bare copper
Insulation Material	FEP
Separator Material	Polyolefin

Dimensions

Cable Length	305 m 1000 ft
Cable Weight	42.40 lb/kft
Diameter Over Jacket	7.239 mm 0.285 in
Jacket Thickness	1.295 mm 0.051 in

Electrical Specifications

ANSI/TIA Category	6A
dc Resistance Unbalance, maximum	4 %

UN874035114/10 | CS44P BLU C6A 4/23 U/UTP CPK 1KFT

dc Resistance, maximum	7.61 ohms/100 m
Mutual Capacitance	6.0 nF/100 m @ 1 kHz
Nominal Velocity of Propagation (NVP)	66 %
Operating Frequency, maximum	500 MHz
Transmission Standards	ANSI/TIA-568-C.2 ISO/IEC 11801 Class EA
Safety Voltage Rating	300 V
Dielectric Strength, minimum	1500 Vac 2500 Vdc
Note	Consult ANSI/TIA-568-C.2 Annex G for length de-rating guidance for cable installation in higher temperature environments

Environmental Specifications

Environmental Space	Plenum
ETL Temperature Rating	75 °C 167 °F
Flame Test Method	CMP
Installation Temperature	0 °C to +60 °C (+32 °F to +140 °F)
Operating Temperature	-20 °C to +75 °C (-4 °F to +167 °F)

General Specifications

Cable Type	U/UTP (unshielded)
Packaging Type	CommPak® box
Pairs, quantity	4
Cable Component Type	Horizontal
Jacket Color	Blue
Product Number	CS44P
Brand	Uniprise®
Conductor Gauge, singles	23 AWG
Conductor Type, singles	Solid
Conductors, quantity	8
Separator Type	Bisector

Mechanical Specifications

Pulling Tension, maximum	11 kg 25 lb
--------------------------	---------------

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



Electrical Performance

Std	Refers to the standard value listed under Transmission Standards in the Electrical Specifications above
Typ	Typical
IL	Insertion Loss (dB/100m)
NEXT	Near End Crosstalk (dB/100m)
ACR	Attenuation to Crosstalk Ratio (dB/100m)
PSNEXT	Power Sum Near End Crosstalk (db/100m)
PSACR	Power Sum Attenuation to Crosstalk Ratio (dB/100m)
ACRF	Attenuation to Crosstalk Ratio - Far End (dB/100m)
PSACRF	Power Sum Attenuation to Crosstalk Ratio - Far End (dB/100m)
RL	Return Loss (dB)

Freq. MHz	IL		NEXT		ACR		PSNEXT		PSACR		ACRF		PSACRF		RL	
	Std	Typ	Std	Typ	Std	Typ	Std	Typ	Std	Typ	Std	Typ	Std	Typ	Std	Typ
1	2.1	1.8	74.3	90.6	72.2	88.8	72.3	88.3	70.2	86.5	67.8	82.1	64.8	80.3	20.0	32.2
4	3.8	3.6	65.3	82.4	61.5	78.8	63.3	80.2	59.5	76.6	55.8	70.1	52.8	68.4	23.0	33.9
8	5.3	5.1	60.8	77.6	55.4	72.5	58.8	75.8	53.4	70.7	49.7	64.1	46.7	62.3	24.5	36.7
10	5.9	5.7	59.3	76.4	53.4	70.7	57.3	74.4	51.4	68.7	47.8	62.2	44.8	60.4	25.0	37.7
16	7.5	7.3	56.2	73.1	48.8	65.9	54.2	71.3	46.8	64.0	43.7	58.2	40.7	56.4	25.0	38.7
20	8.4	8.1	54.8	71.5	46.4	63.4	52.8	69.7	44.4	61.6	41.8	56.4	38.8	54.5	25.0	38.7
25	9.4	9.1	53.3	70.2	44.0	61.1	51.3	68.3	42.0	59.2	39.8	54.5	36.8	52.6	24.3	35.5
31.25	10.5	10.2	51.9	68.6	41.4	58.4	49.9	66.7	39.4	56.5	37.9	52.7	34.9	50.7	23.6	37.2
62.5	15.0	14.6	47.4	64.2	32.4	49.6	45.4	62.3	30.4	47.7	31.9	46.6	28.9	44.7	21.5	34.6
100	19.1	18.6	44.3	60.8	25.2	42.1	42.3	59.0	23.2	40.3	27.8	42.5	24.8	40.5	20.1	30.3
155	24.1	23.4	41.4	58.4	17.4	35.0	39.4	56.4	15.4	33.0	24.0	38.9	21.0	37.0	18.8	30.8
200	27.6	26.8	39.8	56.0	12.2	29.2	37.8	54.2	10.2	27.4	21.8	36.6	18.8	34.6	18.0	30.0
250	31.1	30.1	38.3	54.3	7.3	24.2	36.3	52.5	5.3	22.3	19.8	34.6	16.8	32.6	17.3	30.5
300	34.3	33.1	37.1	53.1	2.9	19.9	35.1	51.2	0.9	18.1	18.3	33.1	15.3	31.2	16.8	31.1
350	37.2	36.0	36.1	51.8	-1.1	15.8	34.1	49.9	-3.1	13.9	16.9	31.9	13.9	29.9	16.3	31.7
400	40.1	38.8	35.3	50.8	-4.8	12.0	33.3	48.8	-6.8	10.0	15.8	30.6	12.8	28.6	15.9	31.5
500	45.3	43.6	33.8	47.9	-11.4	4.3	31.8	45.8	-13.4	2.2	13.8	28.7	10.8	26.7	15.2	32.0
550		43.8		48.0		4.1		45.9		2.0		28.6		26.7		31.9
650		50.2		43.5		-6.7		41.5		-8.8		25.7		23.5		25.3