



The 1006 Series is also available in a **Complete One Box Solution**

1006 Series

The strongest, most versatile electric strike available

Shown with KM Option

The 1006 series is the strongest and most versatile electric strike available. The dual interlocking plunger design and heavy duty stainless steel construction, enables it to exceed every standard developed for electric strikes. With multiple faceplate options, the 1006 will fully accommodate every lock designed to work within an ANSI 4-7/8" strike plate. Tested to exceed 3,000 lbs of static strength, 350 ft-lbs of dynamic strength and factory tested to exceed 1,000,000 cycles of operation, the 1006 is in a class of its own.



Specifications

- UL 10C fire-rated, 3 hour single door (fail secure only)
- UL 10C fire-rated, 1-1/2 hour double door (fail secure only)
- CAN4-S104(ULC-S104) fire door conformant
- ANSI/SDI A250.13 windstorm resistant
- ANSI-ASTM E330
- Florida Building Code approved TAS 201, 202, 203
- UL 1034 burglary-resistant listed and suitable for outdoor use
- UL 294 (6th Edition) listed
- ANSI/BHMA A156.31, Grade 1
- NFPA-252 fire door conformant
- ASTM-E152 fire door conformant
- RoHS compliant
- Environmental Product Declaration
- Patents: 6,021,038; 6,595,564, & 9,183,976

Frame Application

- Metal
- Wood

Electrical (continuous duty)

- .45 Amps at 12 VDC
- .25 Amps at 24 VDC

1006 Models

1006	Universal electric strike	Faceplate options ordered separately, see pages 12-16
1006CAS	Complete electric strike	Includes the N, ND, and NM faceplates
1006CS	Complete electric strike	Includes the SMART Pac II and J, KD, KM, HM, and AD faceplates
1006CLB	Complete electric strike	Includes the J, KD, and KM faceplates
1006CDB	Complete electric strike	Includes the ND and NM faceplates
RF1016	Integrated Prox	Includes the strike body, Prox reader and door position switch
IC1026	Integrated iCLASS®	Includes the strike body, iCLASS reader and door position switch

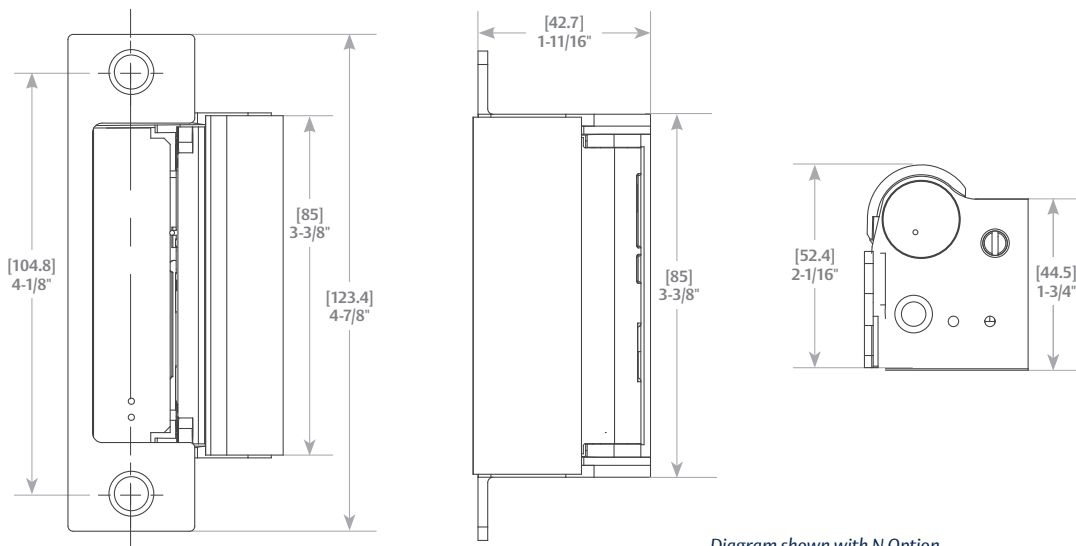


Diagram shown with N Option

Standard Features

- Stainless steel construction
- Tamper-resistant
- Static strength 3,070 lbs (fail secure)
- Dynamic strength 350 ft-lbs (fail secure)
- Endurance 1,000,000 cycles
- Fail secure
- Dual-voltage 12 VDC or 24 VDC continuous duty
- Non-handed
- Internally mounted solenoid
- Accommodates up to 1" deadbolt
- Plug-in connector
- Full keeper shims for horizontal adjustment
- Trim enhancer
- 5 Year limited warranty

Optional Features

- LBM** » Latchbolt monitor
- LBSM** » Latchbolt strike monitor
- Fail safe
- Interchangeable faceplates

Monitor Switches may not work with all faceplate options (see pages 12-16)

Accessories

- 1000-102** » Rain guard
- 1006-103** » Full keeper shims
- 1000-104** » Lip extension trim adapter
- 1006-105** » Trim enhancer BLK (goof plate)
- 1006-109** » Trim adapter
- 1000-110** » Replacement strike plate
- 1000-130** » KD filler plate

- 150** » Strike latch guard
- HES-CUT-MTK** » Metal template kit
- 2004M** » ElectroLynx® adapter
- 2005M3** » SMART Pac® III
- 2006M** » Plug-in buzzer

Finishes

- 630** » Satin stainless steel
- 605** » Bright brass
- 606** » Satin brass
- 612** » Satin bronze
- 613** » Bronze toned
- 629** » Bright stainless steel
- BLK** » Black

**Complete Pacs are only available in the 630 finish*

CYLINDRICAL
LOCKSETSMORTISE
LOCKS WITH
DEADBOLTSMORTISE LOCKS
WITHOUT
DEADBOLTSSPECIALTY
LOCKSETS

WINDSTORM

FIELD SELECTABLE
(12 OR 24VDC)

FIRE RATED



GRADE 1

OUTDOOR
RATEDUL 1034
BURGLARY
LISTED