



861X Stamped Collar

- Stamped Aluminum Construction
- Thickness: 13/64" (5.2mm)
- Finishes - 10B, 26D, 26, 28

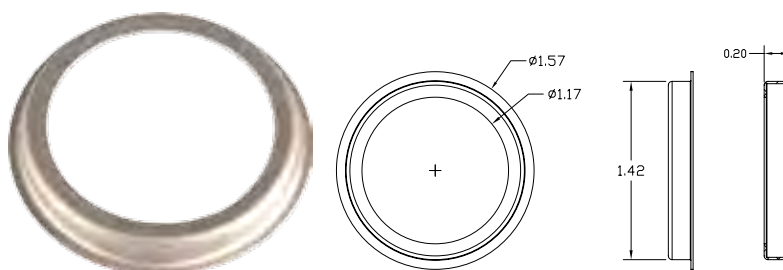

861 Solid Collars

- Aluminum Construction
- Finishes - 03,04,10,10B, 26, 26D, 28, 29, 46

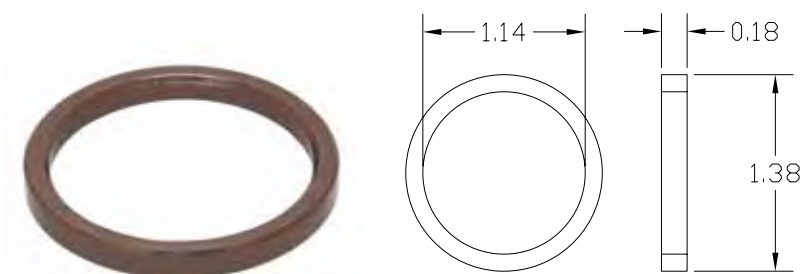

MODEL	THICKNESS
861C	3/32" (2.4mm)
861D	1/8" (3.2mm)
861E	5/32" (4.0mm)
861F	3/16" (4.8mm)

MODEL	THICKNESS
861K	7/32" (5.6mm)
861L	1/4" (6.4mm)
861M	9/32" (7.1mm)
861N	5/16" (7.9mm)

MODEL	THICKNESS
861P	11/32" (7.1mm)
861Q	3/8" (9.5mm)
861R	1/2" (12.7mm)
861S	5/8" (15.9mm)

ilco®