Full size interchangeable core cylinders for Schlage locksets

Full size core o	only
Number	Mechanism
23-030	Conventional core
23-031	Conventional core, less logo
30-120	Conventional core for hotel function (specify hand)
30-121	Hotel function conventional core, less logo
20-740	Primus core
20-741	Primus Core, less logo
20-740-XP	Primus XP core (not available in hotel function)
20-741-XP	Primus XP core, less logo





 $\label{eq:control} \mbox{Available in 606 and 626 finish only. Order control keys separately.}$

Full size IC housings for bored deadlocks, less core						
Lockset series	Description	Number	Specify finish			
B500-Series	Outside	B610-203 (single) B610-205 (double)	605, 606, 609, 612, 613, 619, 625, 626, and 643e			
	Inside	B610-028**	See note below			
B250	Outside	22-061	605, 606, 609, 613, 625, 626			
	Inside of B252	22-062				
H, S200-Series	Outside	5306-135	605, 606, 609, 612, 613, 625, 626			
B600 / 700-Series	Outside	B610-203 (single) B610-205 (double)	605, 606, 609, 612, 613, 619, 625, 626, 643e			
	Inside	B610-028	See note below			

Specify finish of B610-031 inside snap-on faceplate ordered separately for B662/762, and B562.

Full size interch	angeable co	ore padlocks		
Dowt #	Shackle dimensions			
Part #	Α	В	С	
Less cylinder - f	ull size interc	hangeable core		
Brass body				
KS43D3200	3/8"	1 1/2"	3/4"	
KS43F3200	3/8"	2"	3/4"	





^{**}Inside housing does not include snap-on faceplate.

Cylinders for Schlage L Series mortise locksets











Concealed shell cylinder

Cylinder mechanism							
	Design	Function	Conventional	Primus/ Primus XP	Primus UL437/ Primus XP UL437	Primus XP lockout	Primus XP UL437 lockout
	L and N Escutcheons (cylinders and spring only)	All except below	30-021	20-793/ 20-793-XP	20-593/ 20-593-XP	20-717**	20-517**
		L9060P outside	26-021	20-701/ 20-701-XP	20-501/ 20-501-XP	20-715**	20-515**
		L9485, L9486 Hotel functions	30-022*	N/A	N/A	N/A	N/A
l escutcheon	L escutcheon	All except below	30-004	20-789/ 20-789-XP	20-589/ 20-589-XP	N/A	N/A
	with concealed shell cylinder (C suffix)	L9060P outside	26-023	24-767/ 24-767-XP	24-567/ 24-567-XP	N/A	N/A
		L9485, L9486 Hotel functions	30-005*	N/A	N/A	N/A	N/A
6	Sectional trim (cylinder with compression ring & spring)	All except below	30-001	20-787/ 20-787-XP	20-587/ 20-587-XP	20-715	20-517
		L9060P outside	20-001	20-700/ 20-700-XP	20-500/ 20-500-XP	20-715	20-515
		L9485, L9486 Hotel Functions	30-002*	N/A	N/A	N/A	N/A

^{*} Specify door hand for hotel function cylinders.

- Notes 1. Available in 605, 606, 609, 612, 613, 625, 626, 629, and 643E finish. Concealed shell cylinders available in 606 and 626 only.
 - 2. To differentiate between Classic and Everest 29, specify keyway. Example: C or CP (Classic), S123 (Everest 29). Everest 29 S123 keyway standard.
 - 3. $1\frac{1}{8}$ " length standard. Optional lengths available in $\frac{1}{8}$ " (4mm) increments up to $1\frac{3}{4}$ " (44mm).
 - 4. To order less Schlage logo, specify with K510-612 faceplate.
 - 5. Lockout keys must be ordered separately and lockout cylinders will not be master keyed by Schlage.
 - 6. Specify LKB if 0-bitted Primus XP cylinders are required less key blanks.

Cam for all functions except L9060 outside



L583-254 Classic conventional prior to July 2010



L583-153 Everest 29 & Primus XP prior to July 2010

Cam for L9060 outside



B502-191 Classic conventional prior to July 2010



B502-948 Everest 29 & Primus XP prior to July 2010

Modular cylinder cams



L583-475 Modular cylinder



L583-474 Modular cylinder

Modular cams are used for all cylinders made after Aug 2010, whether Classic, Everest 29 or Primus. L583-474 is used on cylinders 1 $\frac{1}{8}$ ", 1 $\frac{3}{8}$ " and 1 $\frac{5}{8}$ ". L583-475 is used on cylinders 1 $\frac{1}{4}$ ", 1 $\frac{1}{2}$ " & 1 $\frac{3}{4}$ ".

Modular cam for L9060 outside



L583-476 Modular cylinder




L583-477 Modular cylinder

L583-476 is for cylinders 1 $^{1}/_{8}$ ", 1 $^{3}/_{8}$ " & 1 $^{5}/_{8}$ ". L583-477 is for cylinders 1 $^{1}/_{4}$ ", 1 $^{1}/_{2}$ " & 1 $^{3}/_{4}$ ".

^{**} Discard compression ring for Lockout cylinders with escutcheon trim.

Everest full size key blanks


Numbers shown are for key blanks. For cut keys, change "35" prefix to "48" for change keys and "49" for master keys. Suffix key section, e.g. 35-009 C123. See facing page for available key sections.

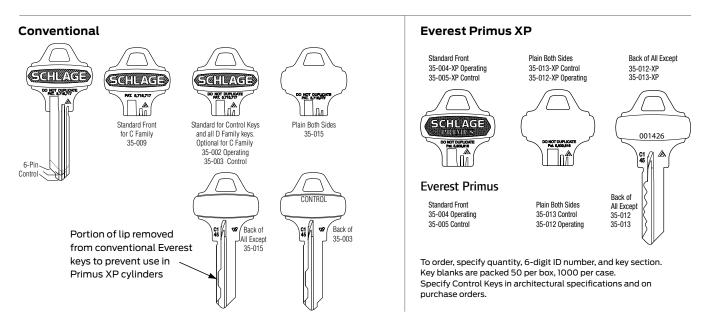

Everest conventional keys are available with and without DO NOT DUPLICATE. Specify plain bow keys for applications when keys must be stamped with additional information such as special die stamps, serial numbering, etc.

Everest 29 Full Size Key Blanks

Numbers shown are for key blanks. For cut keys, change "35" prefix to "48" for change keys and "49" for master keys. Suffix key section, e.g. 35-270 S123. See facing page for available key sections.

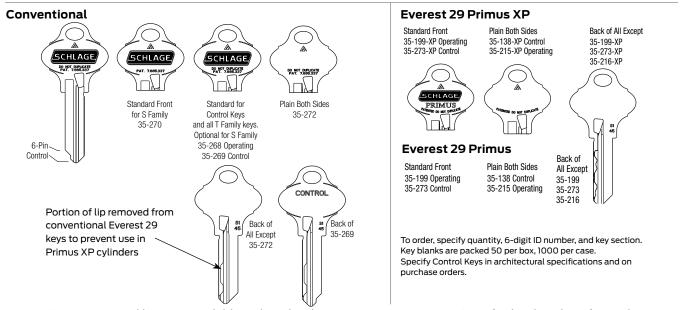

Everest 29 conventional keys are available with and without DO NOT DUPLICATE. Specify plain bow keys for applications when keys must be stamped with additional information such as special die stamps, serial numbering, etc.