

EE518AB(R)



EE518AB

High Intensity LEDs in Blue



EE518AR

High Intensity LEDs in Red

APPLICATIONS:

eVoxbox EE518AB(R) has unique ability to playback a 40-second recorded message on a single channel. This reduces installation expenses and can be used for many types of applications. The unit comes with an on-board mic, speaker with volume control, and a 2-watt amplifier. Messages are stored in the nonvolatile memory and can be changed or re-recorded any time by user.

Wide Range (9V – 24 VDC or 6 – 12 VAC) Power supply capable with standard 9V battery back-up (30 days+).

Easy installation and recording your own "Help!" Voice.

** Pool Alarm Function Capability:



FEATURES & BENEFITS:

- Self-Contained, 9V Battery Back Up
- 40 Seconds Recording Time & Backup Capability
- On-Board Microphone and 2W AMP
- Pool Alarm Capability - "Voice+Beep" (With 5 Min Bypass Function)
- Audio Line Input from other Audio Devices: CD, MP3, PC, etc
- Multiple Triggers with Selectable Latch or Momentary
- On Board HI-LED Alert Matrix
- External Speaker Output Up to 35W Speakers or Input to PA Amp
- External 9 – 24 VDC or 6 – 12 VAC Operation
- On Board Magnetic Contact for Triggering or Recording

EE518AB(R)

SAMPLE MESSAGES:

Alert, the pool door is open
Check for children.

Customers at main entrance, open
the door please.

The fire alarm is activated, please
exit this building immediately.

Do not touch and do not take
pictures here.

The east parking photo beam has
been activated, check that area!

Please turn off lighting.

Please do not forget to lock the main
entry door.


You have entered an unauthorized
area. Leave now. The police have
been dispatched.

All activities are recorded on digital
video system to aid in the
prosecution of any crime committed
against this facility.

SPECIFICATIONS:

- Operation Voltage : 9 – 24 VDC or
6 – 12 VAC
- Current Consumption: 3mA Standby,
200mA Trigger / Loan
- 40 – Second Voice Recording Time
- Trigger Voltage: 5V DC ~ 12V DC
- AMP Power: 2W
- External Speaker Output Up to 35W
- Dimensions: 4 1/2" X 2 1/2" X 1 1/2"
- Weight: 0.4lb

EE518AB(R) BASIC HOOK UP LAYOUT

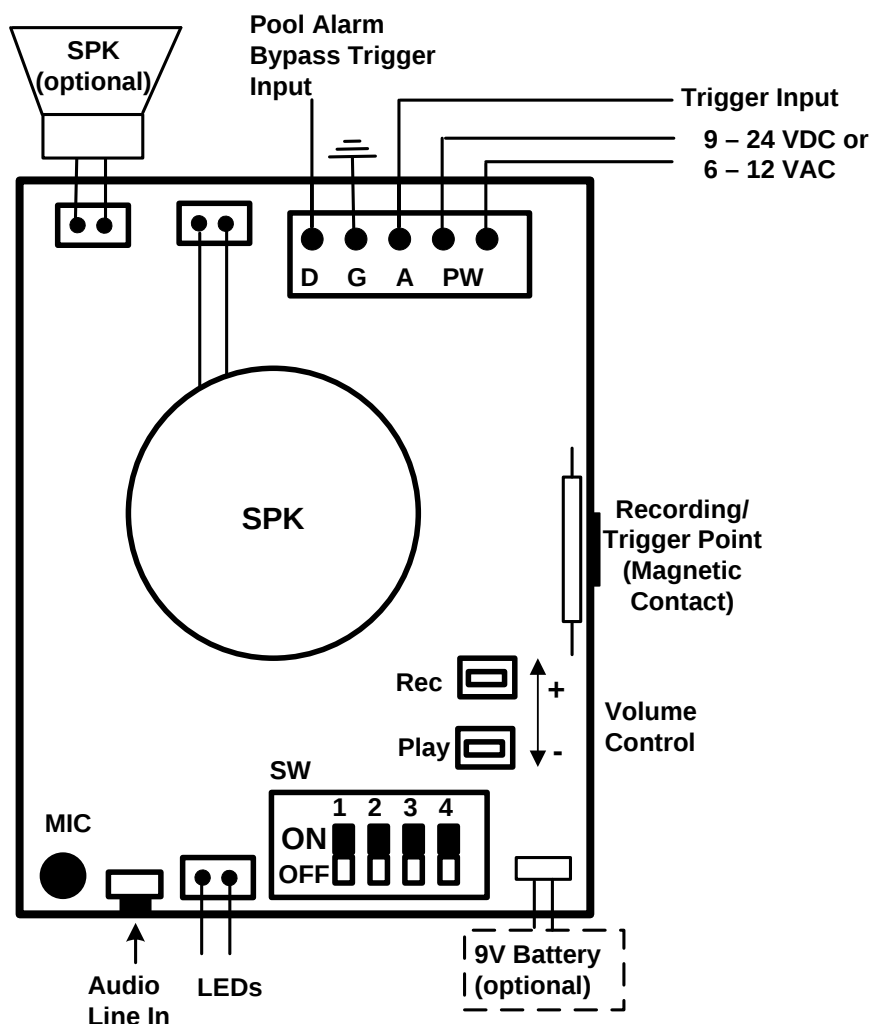

Control Module


2-2

**Stand alone or Integrated to any type
Call, Safety and Access Control Systems
One wire (T-Tap) to any standard
alarm control zone input.**

* Suggested:
Test Battery Every Week
If In Use

**** eVoxbox is not a life saving device,
it's designed to enhance safety and
additional functions with the system**

BASIC LAYOUT OF RECORDING FROM PCs

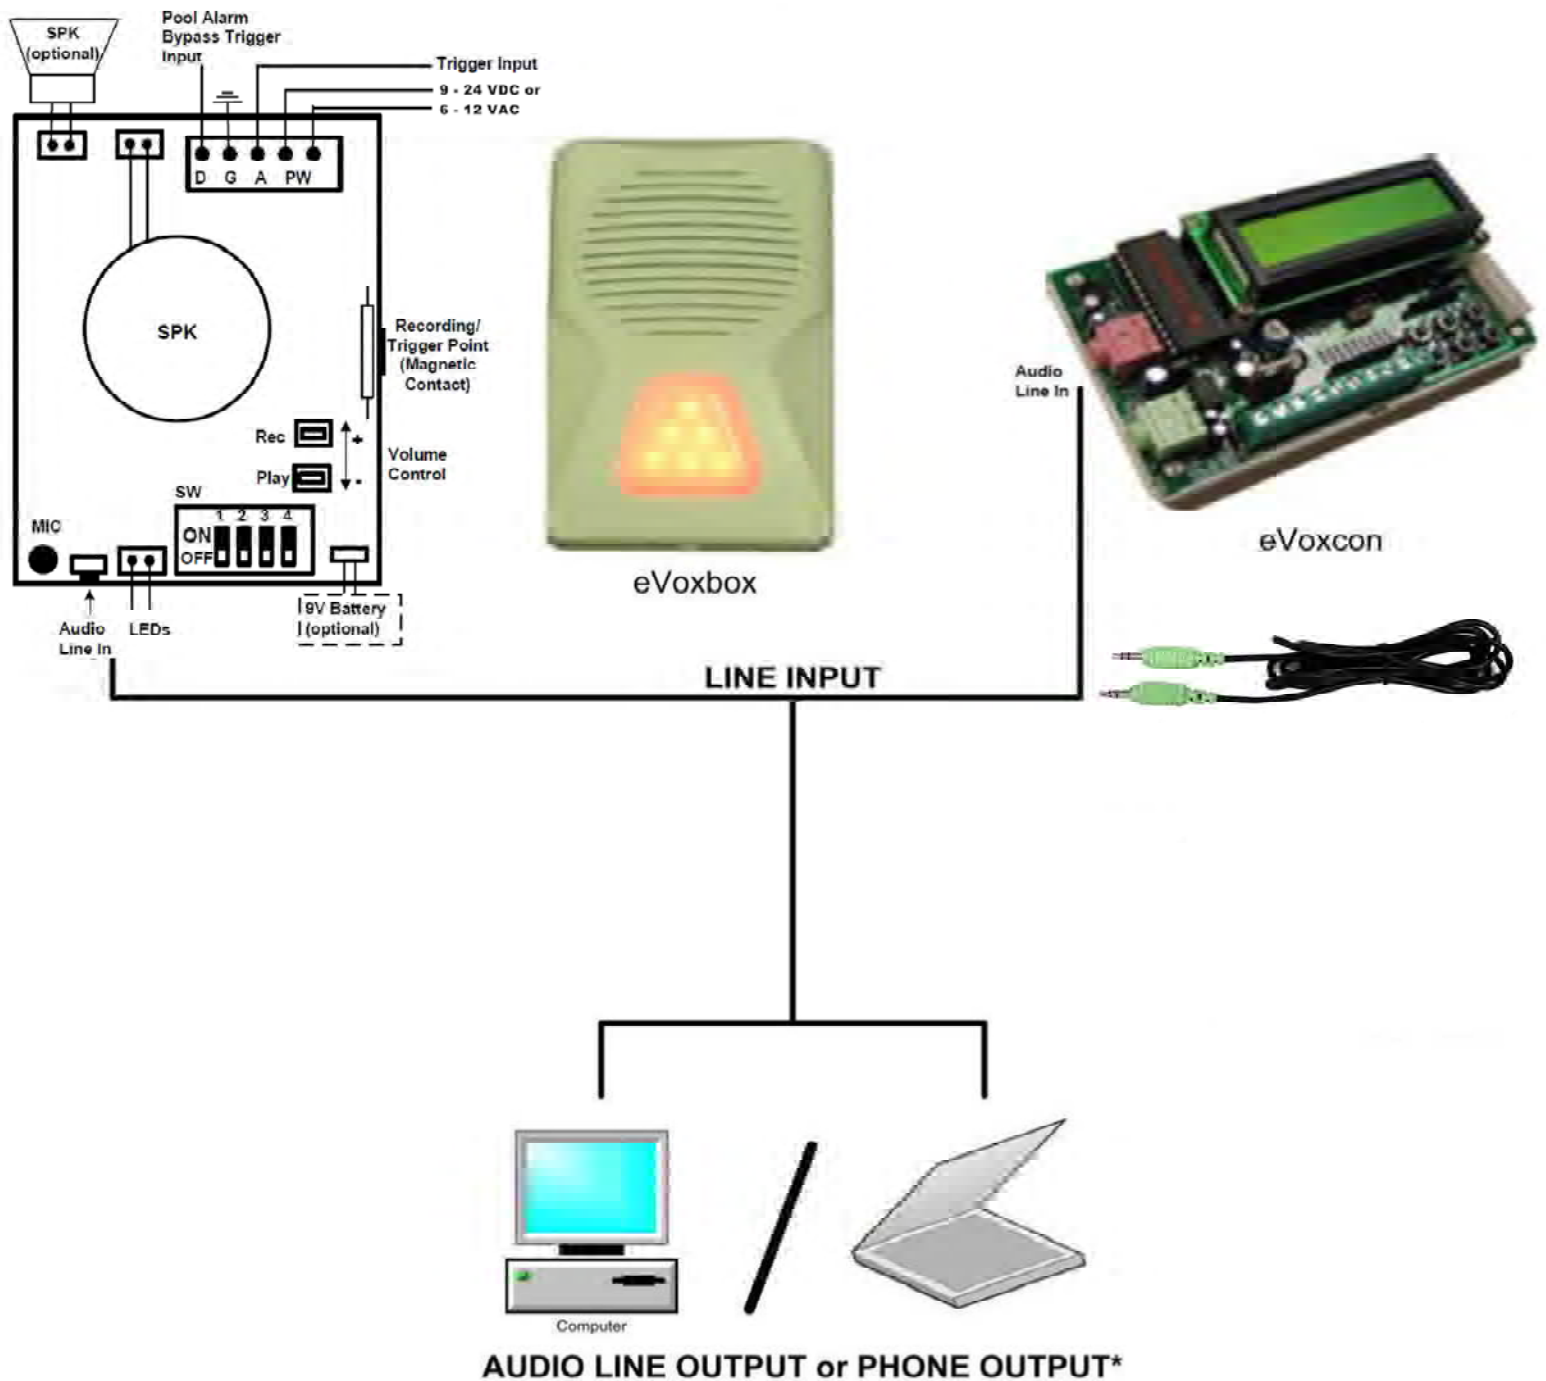

*NOTE: FINE TUNE PC'S OUTPUT VOLUME CONTROL TO MONITOR THE BEST QUALITY LEVEL SETTING.
Create your own message use TEXT TO SPEECH demo from AT&T
<http://www.research.att.com/~ttsweb/tts/demo.php>