



STORMTM

by Inaxsys

INSK44CV1TEB

4 Channel HDCVI Tribrid Kit with 2 x 1MP (720P) HDCVI Eyeball Cameras and 2 x 1MP (720P) HDCVI Bullet Cameras



Tribrid DVR Features

- Supports analog / HDCVI/ UTP/ IP camera inputs
- H.264 dual-stream video compression
- 720P real-time or 1080P non real-time recording on all channels
- HDMI/VGA simultaneous video output
- 4 channel synchronized real-time playback, GRID interface & Smart Search
- 3D intelligent positioning
- 1TB HDD (supports up to 4TB) and 2 USB (2.0) included
- Supports multiple brands of network cameras

Camera Features (both cameras)

- 1/2.9" 1 megapixel CMOS
- 25/30fps @720P
- High speed, long distance real-time transmission
- Day/Night (ICR), AWB, AGC, BLC, 2DNR
- 2.8 mm fixed lens
- Maximum length of IR LEDs: 30m, Smart IR
- IP67 rated, DC 12V

INSEB01IRCF

1 MP HDCVI Eye Ball Camera



STORM
by Inaxsys

Camera INSEBO1IRCF	PAC	NTSC
Image Sensor	1/2.9" 1 megapixel CMOS	
Effective Pixels	1280 (H) × 720(V)	
Electronic Shutter	1/50s - 1/100,000s	1/60s - 1/100,000s
Video Frame Rate	25fps @720P	30fps @720P
Synchronization	Internal	
Min. Illumination	0.05 Lux/F1.6, 0 Lux IR on	
Video Output	1 channel BNC HDCVI high definition video output	
Camera Features		
Maximum IR LEDs Length	30m, Smart IR	
Day/Night	Auto (ICR) / Color / B/W	
Noise Reduction	2D	
Lens		
Focal Length	2.8mm	
Angle of View	H: 98°	
General		
Power Supply	DC12V ±25%	
Power Consumption	Maximum 2.5W	
Working Environment	-30°C to +60°C /and less than 95% RH (no condensing)	
Transmission Distance	Over 800m via 75-3 coaxial cable	
Ingress Protection	IP67	
Dimensions	93.4mm×79.7mm	
Weight	0.35kg	
Material	Metal	

Popular Mounting Solutions




Junction Box Options



Junction Box
INSX121

Dimensions (mm)

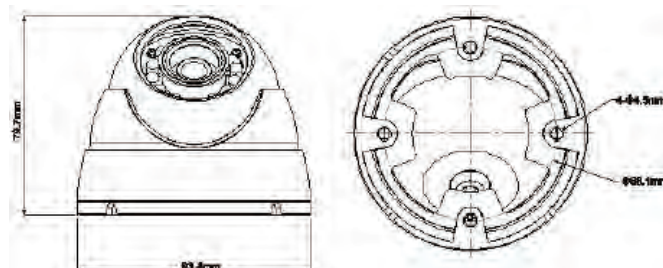

INSBO1IRCF

1 MP HDCVI Bullet Camera



STORM
by Inaxsys

Camera INSBO1IRCF		
Image Sensor	1/2.9" 1 megapixel CMOS	
Effective Pixels	1280 (H) × 720 (V)	
Electronic Shutter	1/50s - 1/100,000s	1/60s - 1/100,000s
Video Frame Rate	25fps @720P	30fps @720P
Synchronization	Internal	
Min. Illumination	0.05 Lux/F1.6, 0 Lux IR on	
Video Output	1 channel BNC HDCVI high definition video output	
Camera Features		
Maximum IR LEDs Length	30m, Smart IR	
Day/Night	Auto (ICR) / Color / B/W	
Noise Reduction	2D	
Lens		
Focal length	2.8 mm	
Angle of View	H: 98°	
General		
Power Supply	DC12V ±25%	
Power Consumption	Maximum 3.5W	
Working Environment	-30°C to +60°C and less than 95% RH (no condensing)	
Transmission Distance	Over 800m via 75-3 coaxial cable	
Ingress Protection	IP67	
Dimensions (W×D×H)	70mm×165mm	
Weight	0.35kg	
Material	Metal (body) and plastic (sunshield)	

Popular Mounting Solutions



INSBO1IRCF



INSX152



POLE MOUNT

Junction Box Options



INSX122



INSX134

Dimensions (mm)

